

DR-75-48

75W/1.6A DIN-Rail 48VDC Industrial Power Supply



Features

- -10°C to 60°C operating temperature range
- Can be installed on DIN-rail TS-35/7.5 or 15
- Short circuit/over load/over voltage/over temperature protections
- UL508 (industrial control equipment) approved



Hardware Specifications

Power

Power Input

- Voltage Range: 85 to 264VAC; 120 to 370VDC
- Frequency Range: 47 to 63Hz
- Efficiency: 81%
- AC Current (Typ.): 1.6A / 115VAC; 0.96A / 230VAC
- Inrush Current (Typ.): Cold Start 20A / 115VAC;
40A / 230VAC
- Leakage Current: <1mA / 240VAC

Power Output

- DC Voltage: 48V
- Rated Current: 1.6A
- Current Range: 0 to 1.6A
- Rated Power: 76.8W
- Ripple & Noise (max.): 240mVp-p
- Voltage Adj. Range: 48 to 53V
- Voltage Tolerance: $\pm 1.0\%$
- Line Regulation: $\pm 0.5\%$
- Load Regulation: $\pm 1.0\%$
- Setup, Rise Time: 1000ms, 60ms/230VAC;
1800ms, 60ms/115VAC at full load
- Hold up Time: 60ms / 230VAC; 12ms / 115VAC at full load

Over Load Protection

- 105 to 150% rated output power Protection type:
Constant current limiting, recovers automatically after fault condition is removed

Environment

Operating Temperature

- -10°C to 60°C (Refer to output load derating curve)

Storage Temperature

- -20°C to 85°C (-4°F to 158°F)

Working Humidity

- 20% to 90%RH non-condensing

Storage Humidity

- 10% to 95%RH

Regulatory Approvals

Safety

- UL508, TUV EN60950-1 Approved

EMC

- EN55011
- EN55022 (CISPR22) Class B
- EN61000-3-2, -3
- Withstand Voltage:
 - I/P-O/P: 3KVAC
 - I/P-FG: 1.5KVAC
 - O/P-FG: 0.5KVAC
- O/P-DC OK: 0.5KVAC Isolation Resistance:
 - I/P-O/P
 - I/P-FG
 - O/P-FG: >100M Ohms / 500VDC

EMS

- EN61000-4-2,3,4,5,6,8,11
- ENV50204
- EN55024 E
- N61000-6-2 (EN50082-2), Heavy industry level, criteria A

Environmental Test Compliance

- Vibration
 - 10 to 500Hz, 2G 10min./1 cycle, period for 60 min. each along X, Y, Z axes

Mechanical

Casing

- Aluminum case

Dimensions

- 55.5mm (W) x 100mm (D) x 125.2 mm(H)
(2.22" (W) x 4" (D) x 5.00" (H))

Weight

- 0.6kg (1.32 lb)

Installation

- DIN-Rail


Protection

Over Voltage Protection


- 58 to 65V
- Protection type : Hiccup mode, recovers automatically after fault condition is removed

Derating Curves


Output Derating :

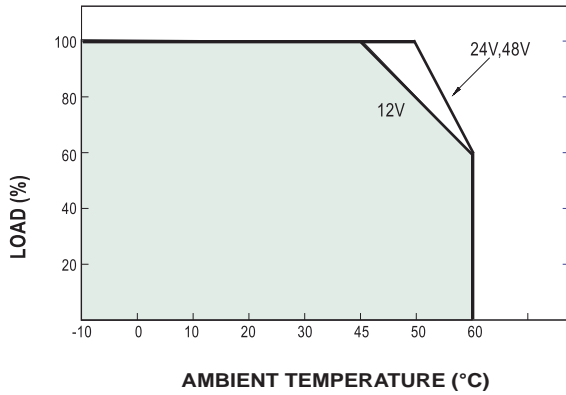

Output Derating VS Input Voltage :

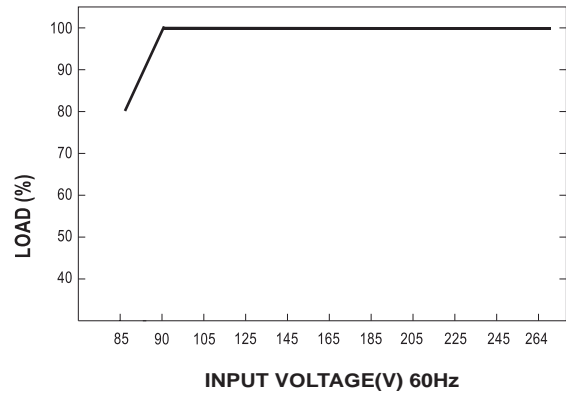


Dimensions




Top



Front

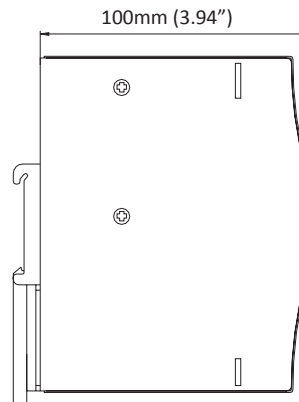

Side



Bottom

Ordering Information

Model

DR-75-48	75W/1.6A DIN-Rail 48VDC Industrial Power Supply
----------	---