


Chapter	Description	Page	Chapter	Description	Page
1	Symbols and units of measurement	2	9	AC brake motors type BN_FA	31
2	Introduction	3	9.1	Degree of protection	31
3	General characteristics	5	9.2	FA brake power supply FA	32
	3.1 Production range	5	9.3	Technical specifications of FA brakes	32
	3.2 Standards	5	9.4	FA brake connections	33
	3.3 Directives 2006/95/EC (LVD) and 2004/108/EC (EMC)	6	10	Brake release systems	34
	3.4 Tolerances	6	10.1	Release lever orientation	35
4...4.2	Motor designation	7	11	Options	36
	4.3 Variants	8	11.1	Soft-start / stop	36
	4.4 Options	10	11.2	Capacitive filter	36
	4.5 Brake-related options	11	11.3	Thermal protective devices	36
	4.6 Example of identification plate	11	11.4	Thermistors	36
5	Mechanical features	12	11.5	Bimetallic thermostates	37
	5.1 Versions	12	11.6	Plug connector	37
	5.2 Degree of protection	13	11.7	Control of brake operation	40
	5.3 Cooling	14	11.8	Additional cable entry for brakemotors	40
	5.4 Direction of rotation	15	11.9	Anti-condensation heaters	40
	5.5 Noise	15	11.10	Tropicalization	41
	5.6 Vibrations and balancing	15	11.11	Second shaft extension	41
	5.7 Terminal box	15	11.12	Rotor balancing	41
	5.8 Cable entry	16	11.13	Ventilation	42
	5.9 Bearings	16	11.14	Rain canopy	44
6	Electrical characteristics	17	11.15	Textile canopy	44
	6.1 Voltage	17	11.16	Feedback units	44
	6.2 Frequency	18	11.17	Surface protection	46
	6.3 Ambient temperature	19	11.18	Painting	46
	6.4 50 HZ normalized power	19	11.19	Certificates	47
	6.5 Motors for USA and Canada	19	12	Tables of motors correlation	47
	6.6 China Compulsory Certification	20	13	Motor rating charts BX	49
	6.7 Insulation class	20	14	Motors dimensions BX	50
	6.8 Type of duty	21	15	Motor rating charts BE	53
	6.9 Inverter-controlled motors	22	16	Motors dimensions BE	55
	6.10 Permissible starts per hour, Z	23	17	Motor rating charts BN	58
7	Asynchronous brake motors	25	18	Motors dimensions BN	68
	7.1 Operation	25			
	7.2 Most significant features	25			
8	DC brake motors type BN_FD	26			
	8.1 Degree of protection	27			
	8.2 FD brake power supply	27			
	8.3 FD brake technical specifications	29			
	8.4 FD brake connections	29			


Revisions

Refer to page 78 for the catalogue revision index. Visit www.bonfiglioli.com to search for catalogues with up-to-date revisions.



1 SYMBOLS AND UNITS OF MEASUREMENT

Symbols	Units of Measure	Description	Symbols	Units of Measure	Description
$\cos\varphi$	–	Power factor	n	[min ⁻¹]	Rated speed
η	–	Efficiency	P_B	[W]	Power drawn by the brake at 20°C
f_m	–	Power adjusting factor	P_n	[kW]	Motor rated power
I	–	Cyclic duration factor	P_r	[kW]	Required power
I_N	[A]	Rated current	t_1	[ms]	Brake response time with one-way rectifier
I_s	[A]	Locked rotor current	t_{1s}	[ms]	Brake response time with electronic-controlled rectifier
J_c	[Kgm ²]	Load moment of inertia	t_2	[ms]	Brake reaction time with a.c. disconnect
J_M	[Kgm ²]	Moment of inertia	t_{2c}	[ms]	Brake reaction time with a.c. and d.c. disconnect
K_c	–	Torque factor	t_a	[°C]	Ambient temperature
K_d	–	Load factor	t_f	[min]	Work time at constant load
K_J	–	Inertia factor	t_r	[min]	Rest time
M_A	[Nm]	Mean breakaway torque	W	[J]	Braking work between service interval
M_B	[Nm]	Brake torque	W_{max}	[J]	Maximum brake work for each braking
M_N	[Nm]	Rated torque	Z	[1/h]	Permissible starting frequency, loaded
M_L	[Nm]	Counter-torque during acceleration	Z_0	[1/h]	Max. permissible unloaded starting frequency ($I = 50\%$)
M_S	[Nm]	Starting torque			



2 INTRODUCTION


Efficiency classes and test methods


Efficiency classes characterise the efficiency with which an electric motor converts electrical energy into mechanical energy. In Europe, the energy efficiency of low voltage electric motors used to be classified using the voluntary Eff1/Eff2/Eff3 system. Outside Europe, other countries used to apply their own national systems, often very different to the European system. This uncertainty in standards led manufacturers to develop a harmonised international standard, and push for the issue of IEC (International Electrotechnical Commission) standard IEC 60034-30-1 “Efficiency classes of single-speed, three-phase, cage-induction motors (IE code)”.

This new standard:

- defines new classes of efficiency
 - IE1** (standard efficiency)
 - IE2** (high efficiency)
 - IE3** (premium efficiency)
- provides a common, international reference system for the classification of electric motors and for national legislation
- introduces a new efficiency measurement method in conformity with standard IEC 60034-1-2:2007

The following table shows the correspondence among the main classes.

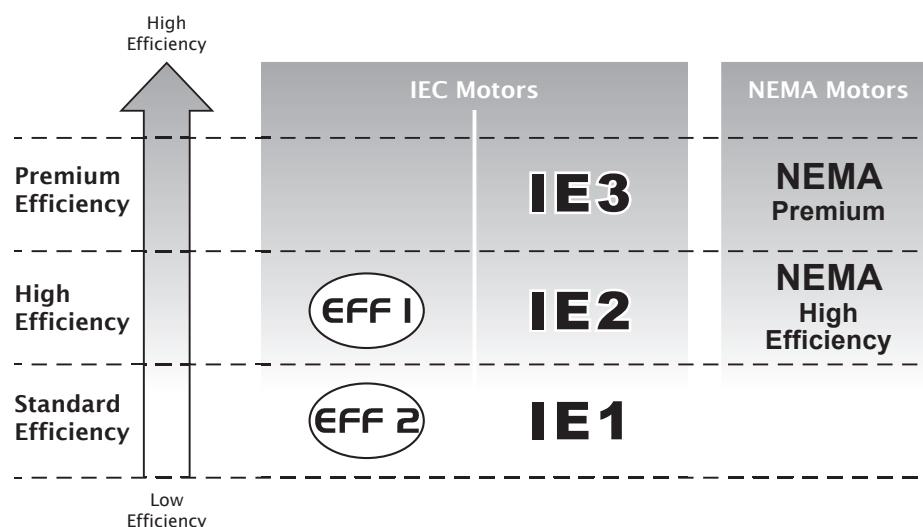



European Commission regulation 640/2009

IEC standard 60034-30-1 establishes technical guidelines for efficiency classification but does not impose any legal requirements for the adoption of any particular efficiency class. These are laid down by European Directives and national laws.

The EC Regulation applying Directive 2005/32/EC was adopted on the 22nd July 2009. This establishes the legal requirements and eco-compatible design criteria for electric motors, and imposes minimum efficiency limits according to the following schedule:


- **16/06/2011:** Electric motors must have a minimum efficiency level equivalent to class **IE2**
- **01/01/2015:** Electric motors with a rated power output between 7.5 kW and 375 kW must have a minimum efficiency level corresponding to **IE3**, or to **IE2** if controlled by an inverter.
- **01/01/2017:** Electric motors with a rated power output between 0.75 kW and 375 kW must have a minimum efficiency level corresponding to **IE3**, or to **IE2** if controlled by an inverter.

Scope and exclusions

EC Regulation 640/2009 applies to 2, 4, and 6 pole, single-speed, three-phase, 50 Hz or 60 Hz, cage-induction motors with rated outputs of 0.75 kW to 375 kW, and rated voltage up to 1000 V, designed for continuous duty (S1).

The regulation does not apply to:

- brakemotors
- motors designed to function immersed in liquid
- motors that are fully integrated in a product (like a gearbox, pump, fan), so that it is not possible to test the performance of the motor independently of that of the product.
- motors expressly designed to function:
 - at altitudes above 4000 metres a.s.l.;
 - in ambient temperatures above 60 °C;
 - at maximum operating temperatures above 400 °C;
 - in ambient temperatures below -30 °C (all motors) or below 0 °C (water-cooled motors);
 - with incoming liquid coolants at temperatures below 0 °C or above 32 °C;
 - in potentially explosive atmospheres as defined by Directive 2014/34/EU.



3 GENERAL CHARACTERISTICS

3.1 Production range

The asynchronous three-phase electric motors BX, BE, BN of BONFIGLIOLI RIDUTTORI's production, are available in basic designs IMB3, IMB5 and IMB14 and derived versions, with the following polarities: 2, 4, 6, 2/4, 2/6, 2/8, 2/12.

Motors are the enclosed type with outer fan and cage-type rotor for use in industrial environments. Standard versions of BX/BE motors are 230/400V Δ/Y (400/690V Δ/Y in sizes BX/BE 160 and BX/BE 180), 50 Hz motors, with a tolerance of ±10%. Standard BN motors are designed to operate from a rated voltage 230/400V Δ/Y (400/690V Δ/Y for frame sizes BN 160 through BN 200) 50 Hz, with ±10% tolerance.

3.2 Standards

The motors described in this catalogue are manufactured to the applicable standards shown in the following table.


(F01)

Title	CEI	IEC
General requirements for rotating electrical machines	CEI EN 60034-1	IEC 60034-1
Terminal markings and direction of rotation of rotating machines	CEI 2-8	IEC 60034-8
Methods of cooling for electrical machines	CEI EN 60034-6	IEC 60034-6
Dimensions and output ratings for rotating electrical machines	EN 50347	IEC 60072
Classification of degree of protection provided by enclosures for rotating machines	CEI EN 60034-5	IEC 60034-5
Noise limits	CEI EN 60034-9	IEC 60034-9
Classification of type of construction and mounting arrangements	CEI EN 60034-7	IEC 60034-7
Rated voltage for low voltage mains power	CEI 8-6	IEC 60038
Vibration level of electric machines	CEI EN 60034-14	IEC 60034-14
Efficiency classes of single-speed, three-phase, cage-induction motors (IE code)	CEI EN 60034-30-1	IEC 60034-30-1
Standard method for determining losses and efficiency from tests	CEI EN 60034-2-1	IEC 60034-2-1

The motors also comply with foreign standards adapted to IEC 60034-1 as shown here below.

(F02)

DIN VDE 0530	Germany
BS5000 / BS4999	Great Britain
AS 1359	Australia
NBNC 51 - 101	Belgium
NEK - IEC 34	Norway
NF C 51	France
OEVE M 10	Austria
SEV 3009	Switzerland
NEN 3173	Netherlands
SS 426 01 01	Sweden



3.3 Directives 2006/95/EC (LVD) and 2004/108/EC (EMC)

BX, BE, BN motors meet the requirements of Directives 2006/95/EC (Low Voltage Directive) and 2004/108/EC (Electromagnetic Compatibility Directive) and their name plates bear the CE mark.

As for the EMC Directive, construction is in accordance with standards CEI EN 60034-1, EN 61000-6-2, EN 61000-6-4.

Motors with FD brakes, when fitted with the suitable capacitive filter at rectifier input (option **CF**), meet the emission limits required by Standard EN 61000-6-3:2007 "Electromagnetic compatibility - Generic Emission Standard - Part 6-3 Residential, commercial and light industrial environment".

Motors also meet the requirements of standard CEI EN 60204-1 "Electrical equipment of machines". The responsibility for final product safety and compliance with applicable directives rests with the manufacturer or the assembler who incorporate the motors as component parts.


3.4 Tolerances

As per the Norms CEI EN 60034-1, applicable the tolerances here below apply to the following quantities.

(F03)


-0.15 (1 - η) P ≤ 50kW	Efficiency
-(1 - cosφ)/6 min 0.02 max 0.07	Power factor
±20% *	Slip
+20%	Locked rotor current
-15% +25%	Locked rotor torque
-10%	Max. torque

(*) ± 30% for motors with $P_n < 1 \text{ kW}$




4 PREMIUM EFFICIENCY MOTOR DESIGNATION

MOTOR							
BX	132S	4	230/400-50	IP55	CLF	B5
							OPTIONS
							MOTOR MOUNTING IM B3 - IM B6, IM B7, IM B8, IM V5, IM V6 IM B5 - IM V1, IM V3 IM B14 - IM V18, IM V19
							INSULATION CLASS CL F standard CL H option
							DEGREE OF PROTECTION IP55 standard (IP56 - option)
							VOLTAGE - FREQUENCY 230/400 VΔ/Y - 50Hz (BX 80 ... 132) 290/500 VΔ/Y - 50Hz (BX 80 ... 132) 400/690 VΔ/Y - 50Hz (BX 160 ... 180) 290/500 VΔ/Y - 50Hz (BX 160 ... 180)
							POLE NUMBER 4
							MOTOR SIZE 80B ... 180L (IEC motor)
							MOTOR TYPE BX = IEC 3-phase, class IE3




4.1 HIGH EFFICIENCY MOTOR DESIGNATION

MOTOR							
BE	90LA	4	230/400-50	IP55	CLF	B5
							OPTIONS
							MOTOR MOUNTING IM B3 - IM B6, IM B7, IM B8, IM V5, IM V6 IM B5 - IM V1, IM V3 IM B14 - IM V18, IM V19
							INSULATION CLASS CL F standard CL H option
							DEGREE OF PROTECTION IP55 standard (IP56 - option)
			VOLTAGE - FREQUENCY 230/400 VΔ/Y - 50Hz (BE 80 ... BE 132) 460 V Y - 60Hz (BE 80 ... BE 132) 400/690 VΔ/Y - 50Hz (BE 160, BE 180) 460 V Δ - 60Hz (BE 160, BE 180)				
			POLE NUMBER 2, 4, 6				
			MOTOR SIZE 80B ... 180L (IEC motor)				
			MOTOR TYPE BE = IEC 3-phase, class IE2				



4.2 STANDARD EFFICIENCY MOTOR DESIGNATION

MOTOR	BRAKE
BN 90LA 4 230/400-50 IP55 CLF B5	FD 7.5 R SB 220SA
	OPTIONS
	BRAKE SUPPLY
	RECTIFIER TYPE AC/DC NB, SB, NBR, SBR
	BRAKE HAND RELEASE R, RM
	BRAKE TORQUE
	BRAKE TYPE FD (d.c. brake) FA (a.c. brake)
	MOTOR MOUNTING IM B3 - IM B6, IM B7, IM B8, IM V5, IM V6 IM B5 - IM V1, IM V3 IM B14 - IM V18, IM V19
	INSULATION CLASS CL F standard CL H option
	DEGREE OF PROTECTION IP55 standard (IP56 - option) IP54, IP55 brake motor
VOLTAGE - FREQUENCY	
POLE NUMBER 2, 4, 6, 2/4, 2/6, 2/8, 2/12, 4/6, 4/8	
MOTOR SIZE 56A ... 200LA (IEC motor)	
MOTOR TYPE BN = IEC 3-phase	



4.3 Variants

(F04)

Description			Default	Option		Page
Voltage			230/400/50			17
Protection class	BX - BE - BN		IP 55	IP 56		13
	BN_FD - BN_FA		IP 54	IP 55		
Insulation class			CLF	CLH		20 21
Design version	BX - BE - BN		B5 B5 R	B14 B14 R	B3	12


Default values.

4.4 Options

(F05)

Description	Catalogue numbers						Availability	Page
	D3	K1	E3					
Thermal protective devices	D3	K1	E3				BX - BE - BN	36 37
50 Hz normalized power	PN						BN	19
Feedback devices	EN1	EN2	EN3	EN4	EN5	EN6	BX - BE - BN	44 45
Anti-condensate heaters	H1	NH1					BX - BE - BN	40
Tropicalized windings	TP						BX - BE - BN	41
Double-extended shaft	PS						BX - BE - BN	41
Rotor balancing grade B	RV						BX - BE - BN	41
External mechanical protections	RC	TC					BX - BE - BN	44
Forced ventilation	U1	U2*					BX - BE - BN	43
Certification	CUS						BE - BN	19
China Compulsory Certification	CCC						BE - BN	20
Plug connector	CON						BX - BE - BN	37
Surface protection	C_-						BX - BE - BN	46
Painting	RAL						BX - BE - BN	46
Certificates	ACM						BX - BE - BN	47
Inspection certificate	CC						BX - BE - BN	47
Type of duty	S2	S3	S9				BN	21

* Only for motors BN and M



4.5 Brake-related options


(F06)

Description	Catalogue numbers				Availability	Page
Brake torque	Refer to the specific brake type					
Manual release lever	R	RM			BN	
Release lever orientation	AB	AA	AC	AD	BN	
DC brake rectifier	NB	NBR	SB	SBR	BN	
Soft-start flywheel	F1				BN	
Capacitive filter	CF				BN	
Brake separate power supply (*)	...SA	...SD			BN	
Brake functionality check	MSW				BN	
Additional cable entry for brake motors	IC				BN	


(*) Specify voltage.

Default values.

4.6 Example of identification plate

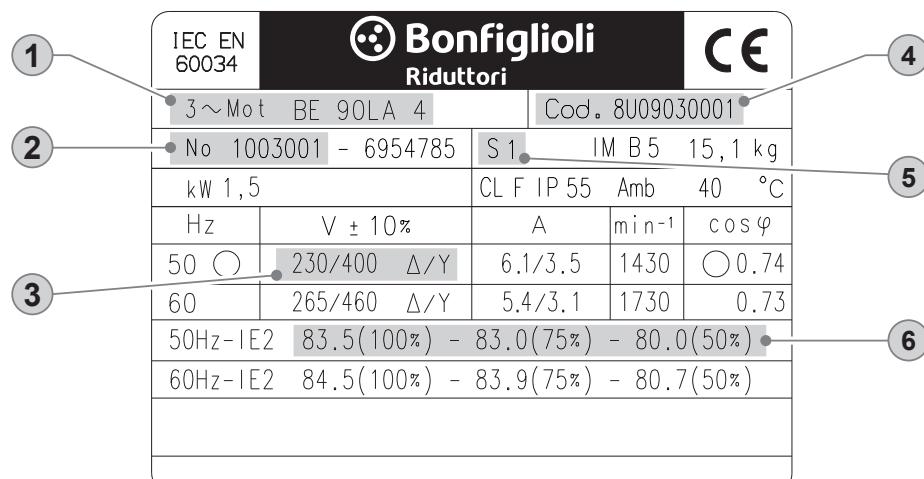

- | | |
|-----------------------------|--|
| ① BONFIGLIOLI
Motor type | ④ Motor code |
| ② Serial number | ⑤ Type of duty: S1
Continuous duty |
| ③ Rated voltage | ⑥ IE Class, Efficiency at:
4/4 - 3/4 - 2/4 load |



5 MECHANICAL FEATURES

5.1 Versions

EC-normalised BX, BE and BN motors are available in the design versions as indicated in the table below here after as per Standards EN 60034-7 (BX/BE), CEI EN 60034-14 (BN).

Mounting versions are:

IM B3 (basic)

IM B6, IM B7, IM B8, IM V5, IM V6 (derived)

IM B5 (basic)

IM V1, IM V3 (derived)

IM B14 (basic)


IM V18, IM V19 (derived)


IM B3 design motors can be installed in positions IM B6, IM B7, IM B8, IM V5 and IM V63; IM B5 design motors can be installed in positions IM V1 and IM V3; IM B14 design motors can be installed in positions IM V18 and IM V19.

In such cases, the basic design IM B5 or IM B14 is indicated on the motor name plate.

In design versions with a vertically located motor and shaft downwards, it is recommended to request the drip cover (always necessary for brake motors). This facility, included in the option list should be specified when ordering as it does not come as a standard device


(F07)

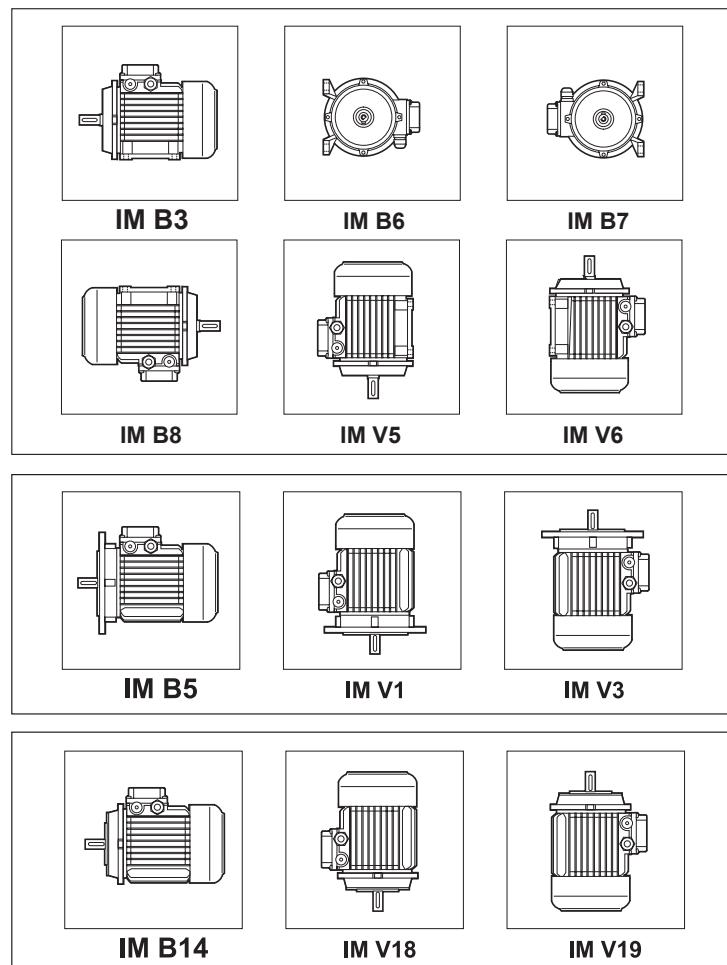



Flange output motors are also available with reduced coupling dimensions, as indicated in the table below - executions **B5R**, **B14R**.

(F08)

						
	BN 71	BX/BE/BN 80	BX/BE/BN 90	BX/BE/BN 100	BX/BE/BN 112	BX/BE/BN 132
DxE - Ø						
B5R ⁽¹⁾	11x23 - 140	14x30 - 160	19x40 - 200	24x50 - 200	24x50 - 200	28x60 - 250
B14R ⁽²⁾	11x23 - 90	14x30 - 105	19x40 - 120	24x50 - 140	—	—

(1) flange with through holes

(2) flange with threaded holes

5.2 Degree of protection

IP..

The following chart provides an overview of the degrees of protection available.

In addition to the degree of protection specified when ordering, motors to be installed outdoors require protection against direct sunlight and also – when they are to be installed vertically down – a drip cover to prevent the ingress of water and solid particles (option **RC**).

(F09)

	IP 54	IP 55	IP 56
BX - BE - BN		standard	
BN_FD BN_FA	standard		




IP		
5	5	
0		Not protected
1		Protected against extraneous solid bodies having $\varnothing \geq 50$ mm
2		Protected against extraneous solid bodies having $\varnothing \geq 12.5$ mm
3		Protected against extraneous solid bodies having $\varnothing \geq 2.5$ mm
4		Protected against extraneous solid bodies having $\varnothing \geq 1.0$ mm
5		Protected against dust
6		No dust ingress
0		Not protected
1		Protected against vertical water drips
2		Protected against vertical water drips inclined up to 15°
3		Protected against rain
4		Protected against water splashes
5		Protected against jets of water
6		Protected against powerful jets of water
7		Protected against the effects of temporary immersion
8		Protected against the effects of continuous immersion

5.3 Cooling

The motors are externally ventilated (IC 411 to CEI EN 60034-6) and are equipped with a plastic fan working in both directions.

The motors must be installed allowing sufficient space between fan cowl and the nearest wall to ensure free air intake and allow access for maintenance purposes on motor and brake, if supplied. Independent, forced air ventilation (IC 416) can be supplied on request (option **U1**).

This solution enables to increase the motor duty factor when driven by an inverter and operating at reduced speed.



5.4 Direction of rotation

Rotation is possible in both directions. If terminals U1, V1, and W1 are connected to line phases L1,L2 and L3, clockwise rotation (looking from drive end) is obtained. For counterclockwise rotation, switch two phases.

5.5 Noise

Noise levels, measured using the method prescribed by ISO 1680 Standards, are within the maximum levels specified by Standards CEI EN 60034-9.

5.6 Vibrations and balancing

Rotor shafts are balanced with half key fitted and fall within the vibration class N, as per Standard CEI EN 60034-14.

5.7 Terminal box

Terminal board features 6 studs for eyelet terminal connection. A ground terminal is also supplied for earthing of the equipment. Terminals number and type are shown in the following table.

For brake power supply, please read par. 8 (brake FD), 9 (brake FA).

In motor design IM B3, the terminal box is at the top (side opposite to feet).

Brakemotors house the a.c./d.c. rectifier (factory pre-wired) inside the terminal box.

Wiring instructions are provided either in the box or in the user manual.

(F10)

	No. of terminals	Terminal threads	Wiremax cross section area sq mm ²
BX 80, BX 90 BE 80, BE 90 BN 56 ... BN 90	6	M4	2.5
BX 100 ... BX 132 BE 100 ... BE 132 BN 100 ... BN 160MR	6	M5	6
BX 160 - BE 160 ... BE 180M BN 160M ... BN 180M	6	M6	16
BX 180 - BE 180L BN 180L ... BN 200L	6	M8	25
BX 80 ... BX 132 BE 80 ... BE 132 BN 63 ... BN 160MR	9	M4	6
BX 160 ... BX 180 BE 160 ... BE 180 BN 160M ... BN 200	9	M6	16



5.8 Cable entry

The holes used to bring cables to terminal boxes use metric threads in accordance with standard EN 50262 as indicated in the table here after.

(F11)

	Cable gland and dimensions	Maximum cable diameter allowed [mm]	
BN 63	2 x M20 x 1.5	1 Hole on each side	13
BN 71	2 x M25 x 1.5		17
BX 80 - BX 90 BE 80 - BE 90 BN 80 - BN 90	2 x M25 x 1.5		17
BX 100 - BX 112 BE 100 - BE 112 BN 100 - BN 112	2 x M32 x 1.5 2 x M25 x 1.5	2 Holes on each side	21 17
BX 132 - BE 132 BN 132...BN 160MR	4 x M32 x 1.5		21
BX 160 - BX 180 BE 160 - BE 180 BN 160M...BN 200L	2 x M40 x 1.5		28

5.9 Bearings


Life lubricated preloaded radial ball bearings are used, types are shown in the chart here under. Calculated endurance lifetime L_{10h} , as per ISO 281, in unloaded condition, exceeds 40000 hrs.

DE = drive end

NDE = non drive end

(F12)

	DE		NDE
	BX, BE, BN, BN_FD, BN_FA	BX, BE, BN	BN_FD BN_FA
BN 56	6201 2Z C3	6201 2Z C3	—
BN 63	6201 2Z C3	6201 2Z C3	6201 2RS C3
BN 71	6202 2Z C3	6202 2Z C3	6202 2RS C3
BX 80 - BE 80 BN 80	6204 2Z C3	6204 2Z C3	6204 2RS C3
BX 90 - BE 90 BN 90	6205 2Z C3	6205 2Z C3	6305 2RS C3
BX 100 - BE 100 BN 100	6206 2Z C3	6206 2Z C3	6206 2RS C3
BX 112 - BE 112 BN 112	6306 2Z C3	6306 2Z C3	6306 2RS C3
BX 132 - BE 132 BN 132	6308 2Z C3	6308 2Z C3	6308 2RS C3
BN 160MR	6309 2Z C3	6308 2Z C3	6308 2RS C3
BX 160M/L BE 160M/L BN 160M/L	6309 2Z C3	6309 2Z C3	6309 2RS C3
BN 180M	6310 2Z C3	6309 2Z C3	6309 2RS C3
BX 180M/L BE 180M/L BN 180L	6310 2Z C3	6310 2Z C3	6310 2RS C3
BN 200L	6312 2Z C3	6310 2Z C3	6310 2RS C3



6 ELECTRICAL CHARACTERISTICS

6.1 Voltage

Single speed motors are provided in standard execution either for nominal voltage 230 / 400 V Δ/Y, 50 Hz, or 400 / 690 V Δ/Y, 50 Hz, with a voltage tolerance of $\pm 10\%$, according to what is specified on the below table.

On all the motors BN, for which the voltage / frequency configuration is not included on the below table, the voltage tolerance is reduced down to $\pm 5\%$.

For the operation out of the tolerance boundaries, the temperature may exceed by 10 K the limit provided by the adopted insulation class.

The motors are suitable for operation on distribution European grid with voltage complying with the publication IEC 60038.

(F13)

Efficiency class		V_{mot} $\pm 10\%$ 3 ~	Configuration
IE3	BX 80 ... 132	230 / 400 V - Δ/Y - 50 Hz	standard
	BX 160, BX 180	400 / 690 V - Δ/Y - 50 Hz	standard
IE2	BE 80 ... 132	230 / 400 V - Δ/Y - 50 Hz	standard
		460 V Y - 60 Hz ¹	standard
	BE 160, BE 180	400 / 690 V - Δ/Y - 50 Hz	At request, carries no extra charge
		400 / 690 V - Δ/Y - 50 Hz	standard
		460 V Δ - 60 Hz ¹	standard
IE1	BN 56 ... BN 132	230 / 400 V - Δ/Y - 50 Hz	standard
		400 / 690 V - Δ/Y - 50 Hz	At request, carries no extra charge
		460 V Y - 60 Hz	standard
	BN 160 ... 200	400 / 690 V - Δ/Y - 50 Hz	standard
		460 V Δ - 60 Hz	standard

¹ 4 pole motor only


The only rated voltage for motors type at 50 Hz and all double speed motors is 400 V. Applicable tolerances as per CEI EN 60034-1.

The table below shows the wiring options available.

(F14)

Number of poles		Winding connection
2	BE 80 ... BE 160 - BN 63 ... BN 200	Δ / Y (²)
4	BX 80 ... BX 180 BE 80 ... BE 180 - BN 56 ... BN 200	
6	BE 90 ... BE 160 - BN 63 ... BN 200	
8	BN 71 ... BN 132	Δ / YY (Dahlander)
2/4	BN 63 ... BN 132	Y / Y (Two windings)
2/6	BN 71 ... BN 132	
2/8	BN 71 ... BN 132	
2/12	BN 80 ... BN 132	
4/6	BN 71 ... BN 132	
4/8	BN 80 ... BN 132	Δ / YY (Dahlander)

(²) Motors with voltage in ratio 2 (ex. 230/460 - 60) will be equipped with a 9 pin terminal box with winding connection either $\Delta \Delta / \Delta$ or YY / Y (except 6 pole BN 63 Δ / Y)



6.2 Frequency

Rated output power BN for 60 Hz operation is shown in the following diagram.

(F15)


	P _n [kW]					P _n [kW]			
	2P	4P	6P	8P		2P	4P	6P	8P
BN 56A	–	0.07	–	–	BN 100L	3.5	–	–	–
BN 56B	–	0.10	–	–	BN 100LA	–	2.5	1.8	0.85
BN 63A	0.21	0.14	0.10	–	BN 100LB	4.7	3.5	2.2	1.3
BN 63B	0.30	0.21	0.14	–	BN 112M	4.7	4.7	2.5	1.8
BN 63C	0.45	0.30	–	–	BN 132S	–	6.5	3.5	2.5
BN 71A	0.45	0.30	0.21	0.10	BN 132SA	6.5	–	–	–
BN 71B	0.65	0.45	0.30	0.14	BN 132SB	8.7	–	–	–
BN 71C	0.90	0.65	0.45	–	BN 132M	11	–	–	3.5
BN 80A	0.90	0.65	0.45	0.21	BN 132MA	–	8.7	4.6	–
BN 80B	1.30	0.90	0.65	0.30	BN 132MB	–	11	6.5	–
BN 80C	1.80	1.3	0.90	–	BN 160MR	12.5	12.5	–	–
BN 90S	–	1.3	0.90	0.45	BN 160MB	17.5	–	–	–
BN 90SA	1.8	–	–	–	BN 160M	–	–	8.6	–
BN 90SB	2.2	–	–	–	BN 160L	21.5	17.5	12.6	–
BN 90L	2.5	–	1.3	0.65	BN 180M	24.5	21.5	–	–
BN 90LA	–	1.8	–	–	BN 180L	–	25.3	17.5	–
BN 90LB	–	2.2	–	–	BN 200L	–	34	–	–
					BN 200LA	34	–	22	–

BX and BE motors are available at 60 Hz on a 4 pole configuration only, and their power rating is the same as their 50 Hz counterpart. Double speed BN motors supplied at 60 Hz will have an increase of nominal power, referred to 50 Hz, equal to 15%, whereas double speed BX / BE motors are not available. If a nominal power rating, equal to the normalised nominal power rating at 50 Hz, was requested to be on a nameplate of a motor meant to be voltage supplied at 60 Hz, the PN option shall be specified on the motor designation.

Motors normally designed for a 50 Hz frequency may be used on a 60 Hz operating grid, but the related data shall be updated according to the following table.

Motors designated for 50 Hz operation show on the nameplate also the values for 60 Hz operation (excluding motors in CUS execution and brake motors). See the following table.

(F16)	50 Hz	60 Hz			
		V - 50 Hz	V - 60 Hz	Pn - 60 Hz	M _n , M _a /M _n - 60 Hz
BX/BE	230/400 Δ/Y	265 - 460 Δ Y		1	0.83
	400/690 Δ/Y	460 Δ			
BN	230/400 Δ/Y	220 - 240 Δ		1.15	1.2
	380 - 415 Y	380 - 415 Y			
BN	400/690 Δ/Y	380 - 415 Δ		1	1.2
	230/400 Δ/Y	265 - 280 Δ			
	440 - 480 Y	440 - 480 Y			
	400/690 Δ/Y	440 - 480 Δ			



6.3 Ambient temperature

Catalogue rating values are calculated for 50 Hz operation and for standard ambient conditions (temperature 40 °C; elevation ≤ 1000 m a.s.l.) as per the CEI EN 60034-1 Standards.

The motors can be used within the 40 - 60 °C temperature range with rated power output adjusted by factors given in the table below.

(F17)

Ambient temperature (°C)	40°	45°	50°	55°	60°
Permitted power as a % of rated power	100%	95%	90%	85%	80%

Should a derating factor higher than 15% apply please consult factory.

6.4 50 HZ normalized power

PN

With this option, motor name plate includes 50 Hz normalized power information even when motor is designated for operation with 60 Hz power mains. For 60 Hz supplies along with voltages 230/460V and 575V the PN option is applied by default.

6.5 Motors for USA and Canada

CUS

Motors are available in NEMA Design C configuration (concerning electrical characteristics), in compliance with CSA (Canadian standard) C22.2 No. 100 and UL (Underwriters Laboratory) UL 1004-1. By specifying the option CUS the name plate is marked with both symbols shown here below.



CUS option is not currently available for IE3 motors.


The CUS option does not apply to servo-ventilated motors.

US power mains voltages and the corresponding rated voltages to be specified for the motor are indicated in the following table:

(F18)

Frequency	Mains voltage	V_{mot}
60 Hz	208 V	200 V
	240 V	230 V
	480 V	460 V
	600 V	575 V

CUS option is applicable onto 50 Hz operating motors as well.



Motors with voltage in ratio 2 (e.g. 230/460-60; 220/440-60) feature, as standard, a 9-stud terminal board. For same executions, as well as for 575V-60Hz supply, the nominal rating is coincident with the correspondent 50Hz rating.

For DC brake motors type BN_FD, the rectifier is connected to a single-phase 230 VAC supply voltage in the motor terminal box.

Brake power supply for brake motors is as follows:

(F19)

BN_FD	BN_FA	Power supply
Connected to terminal box 1~230V c.a.	Separate power supply	230V Δ 230SA
	Separate power supply	460V Y 460SA

6.6 China Compulsory Certification

CCC

Electric motors destined for sale in the People's Republic of China have to be certified under the CCC (China Compulsory Certification) system. BN motors of up to 7 Nm in rated torque are available with CCC certification and a special nameplate bearing the mark shown below:



CCC option is not currently available for IE3 motors.

CCC option is not currently available for servo - ventilated motors.

6.7 Insulation class


CL F

Bonfiglioli motors use class **F** insulating materials (enamelled wire, insulators, impregnation resins) as compare to the standard motor.

In standard motors, stator windings over temperature normally stays below the 80 K limit corresponding to class B over temperature.

A careful selection of insulating components makes the motors compatible with tropical climates and normal vibration.

For applications involving the presence of aggressive chemicals or high humidity, contact Bonfiglioli Engineering for assistance with product selection.




CL H

Motors manufactured in insulation class **H** are available at request.

Not available for motors in compliance with CSA e UL standards (CUS option).

(F20)

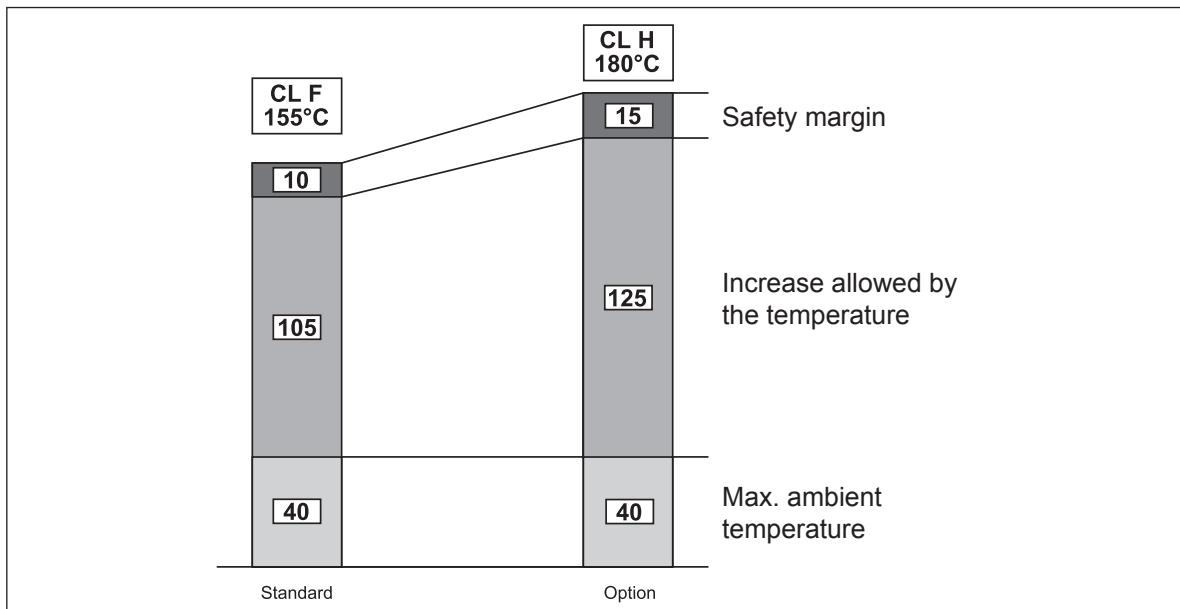

6.8 Type of duty

Unless otherwise specified, catalogue motor power refers to continuous duty S1.

Any operating conditions other than S1 duty must be identified in accordance with duty cycle definitions laid down in standards CEI EN 60034-1.

For duty cycles S2 and S3, the power increase co-efficient reported in the following table may be used. Please note that the table provided below applies to single-speed motors.

As an alternative to S1 continuous duty, one of the following values can be specified at the product configuration stage: S2, S3 or S9. The motor nameplate will be marked with an increased power rating to suit the type of duty, and with specific electrical data and a duty type of S2-30 min, S3-70% or S9 respectively.

For further details, contact Bonfiglioli's Technical Service.


Please contact Bonfiglioli Engineering for the power increase coefficients applicable to switch-pole motors.

(F21)

	Type of duty						
	S2			S3 *			
	10	30 (*)	60	25%	40%	70% (*)	
f _m	1.35	1.15	1.05	1.25	1.15	1.1	Contact us

* Cycle duration must, in any event, be equal to or less than 10 minutes; if this time is exceeded, please contact our Technical Service.

(*) Default values from options (tab. F05).



6.8.1 Cyclic duration factor:


$$I = \frac{t_f}{t_f + t_r} \cdot 100 \quad (01)$$

t_f = work time under constant load

t_r = rest time

6.8.2 Limited duration duty S2


This type of duty is characterized by operation at constant load for a limited time, which is shorter than the time required to reach thermal equilibrium, followed by a rest period of sufficient duration to restore ambient temperature in the motor.



6.8.3 Periodical intermittent duty S3:

This type of duty is characterized by a sequence of identical operation cycles, each including a constant load operation period and a rest period.

For this type of duty, the starting current does not significantly influence overtemperature.




6.9 Inverter-controlled motors


The electric motors Bonfiglioli may be used in combination with PWM inverters with rated voltage at transformer input up to 500 V. Standard motors use a phase insulating system with separators, class 2 enamelled wire and class H impregnation resins (1600V peak-to-peak voltage pulse capacity and rise edge $t_s > 0.1\mu s$ at motor terminals). Typical torque/speed curves referred to S1 duty for motors with base frequency $f_b = 50$ Hz are reported in the table below.

Because ventilation is somewhat impaired in operation at lower frequencies (about 30 Hz), standard motors with incorporated fan (IC411) require adequate torque derating or - alternately - the addition of a separate supply fan cooling.

Above base frequency, upon reaching the maximum output voltage of the inverter, the motor enters a steady-power field of operation, and shaft torque drops with ratio (f/f_b) . As motor maximum torque decreases with $(f/f_b)^2$, the allowed overloading must be reduced progressively.



(F22)

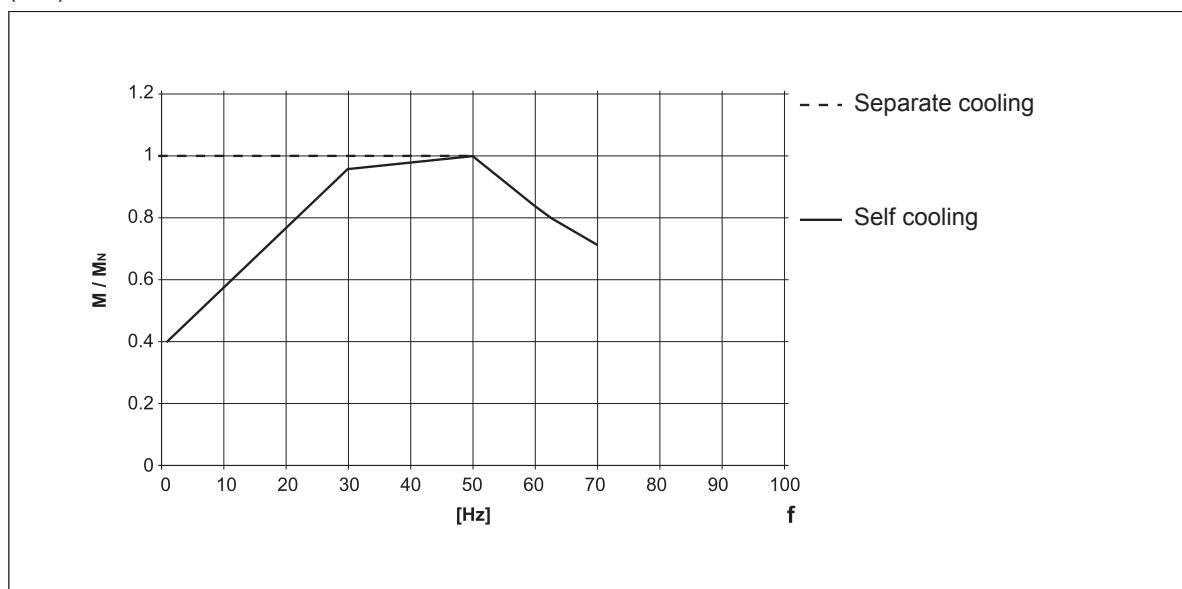

The following table reports the mechanical speed limit for motors operating above rated frequency:

(F23)

	n [min ⁻¹]		
	2p	4p	6p
≤ BE 112 - BN 112	5200	4000	3000
≥ BE 132 - BN 132	4500	4000	3000
BX 80 ... BX 180		4000	

Above rated speed, motors generate increased mechanical vibration and fan noise. Class B rotor balancing is highly recommended in these applications. Installing a separate supply fan cooling may also be advisable.


Remote-controlled fan and brake (if fitted) must always be connected direct to mains power supply.

6.10 Permissible starts per hour, Z

The rating charts of brakemotors lend the permitted number of starts Z_0 , based on 50% intermittence and for unloaded operation.

The catalogue value represents the maximum number of starts per hour for the motor without exceeding the rated temperature for the insulation class F.

To give a practical example for an application characterized by inertia J_c , drawing power P_r and requiring mean torque at start-up M_L the actual number of starts per hour for the motor can be calculated approximately through the following equation:



$$Z = \frac{Z_0 \cdot K_c \cdot K_d}{K_J} \quad (02)$$


where:

$$K_J = \frac{J_m + J_c}{J_m} \quad \text{inertia factor}$$


$$K_c = \frac{M_a - M_L}{M_a} \quad \text{torque factor}$$

$$K_d = \quad \text{load factor, see the following table}$$

(F24)

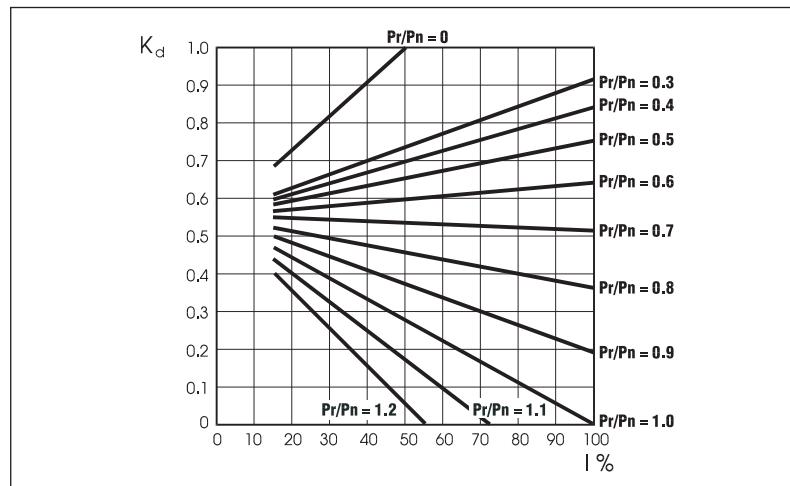

If actual starts per hour is within permitted value (Z) it may be worth checking that braking work is compatible with brake (thermal) capacity W_{max} also given in the tables (F31), (F39) and dependent on the number of switches (c/h).




7 ASYNCHRONOUS BRAKE MOTORS

7.1 Operation

Versions with incorporated brake use spring-applied DC (FD option) or AC (FA options) brakes. All brakes are designed to provide fail-safe operation, meaning that they are applied by spring-action in the event of power failure.

(F25)

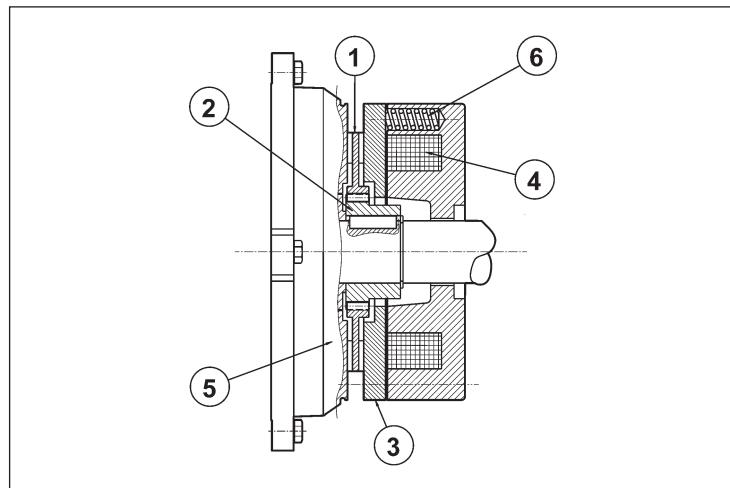

Key:

- ① brake disc
- ② disc carrier
- ③ pressure plate
- ④ brake coil
- ⑤ motor rear shield
- ⑥ brake springs

When voltage is interrupted, pressure springs push the armature plate against the brake disc. The disc becomes trapped between the armature plate and motor shield and stops the shaft from rotation. When the coil is energized, a magnetic field strong enough to overcome spring action attracts the armature plate, so that the brake disc – which is integral with the motor shaft – is released.

7.2 Most significant features

- High braking torques (normally $M_b \approx 2 M_n$), braking torque adjustment.
- Steel brake disc with double friction lining (low-wear, asbestos-free lining).
- Hexagonal seat on motor shaft fan end (N.D.E.) for manual rotation (not compatible with options PS, RC, TC, U1, U2, EN1, EN2, EN3, EN4, EN5, EN6).
- Manual release lever (options **R** and **RM** for BN_FD; option **R** for BN_FA).
- Corrosion-proof treatment on all brake surfaces.
- Insulation class F.




8 DC BRAKE MOTORS TYPE BN_FD

Frame sizes: BN 63 ... BN 200L


BE motors may be available equipped with the FD brake, for further information please contact our Technical Department.

(F26)

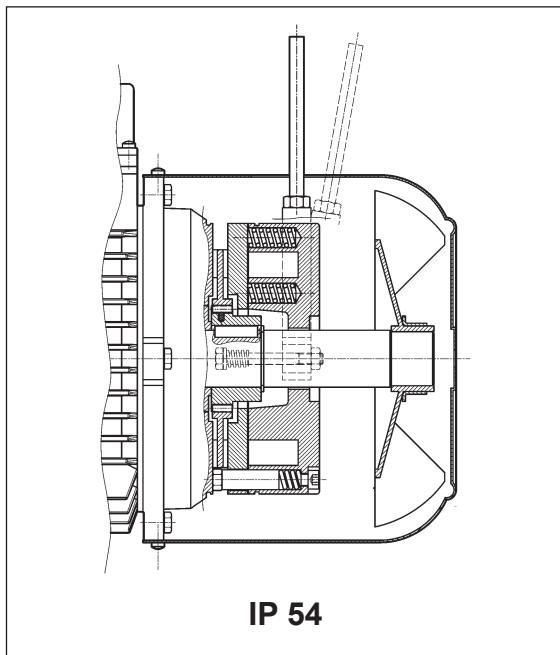

IP 54

(F27)

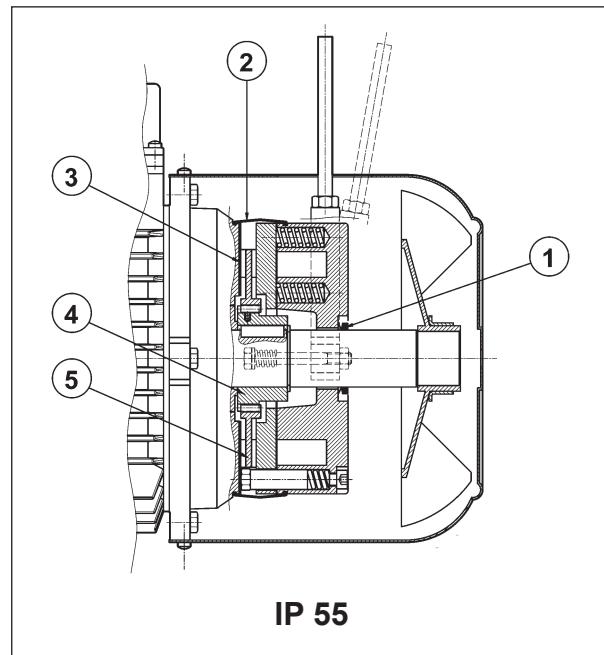

IP 55

Direct current toroidal-coil electromagnetic brake bolted onto motor shield. Preloading springs provide axial positioning of magnet body.

Brake disc slides axially on steel hub shrunk onto motor shaft with anti-vibration device.


Brake torque factory setting is indicated in the corresponding motor rating charts. Braking torque may be modified by changing the type and/or number of springs.

At request, motors may be equipped with manual release lever with automatic return (**R**) or system for holding brake in the released position (**RM**).

See variant at paragraph "BRAKE RELEASE SYSTEMS" for available release lever locations.

FD brakes ensure excellent dynamic performance with low noise. DC brake operating characteristics may be optimized to meet application requirements by choosing from the various rectifier/power supply and wiring connection options available.

For applications involving lifting and/or high hourly energy dissipation, contact Bonfiglioli's Technical Service.



8.1 Degree of protection

Standard protection class is IP54.

Brake motor FD is also available in protection class **IP55**, which mandates the following variants:

- ① V-ring at N.D.E. of motor shaft
- ② dust and water-proof rubber boot
- ③ stainless steel ring placed between motor shield and brake disc
- ④ stainless steel hub
- ⑤ stainless steel brake disc

8.2 FD brake power supply

A rectifier accommodated inside the terminal box feeds the DC brake coil. Wiring connection across rectifier and brake coil is performed at the factory.

On all single-pole motors, rectifier is connected to the motor terminal board.

Rectifier standard power supply voltage V_B is as indicated in the following table, regardless of mains frequency:

(F28)

2, 4, 6 P		1 speed		
	BN_FD V_{mot} ± 10% 3 ~	V_B ± 10% 1 ~	brake connected to terminal board power supply	separate power supply
BN 63...BN 132	230/400 V – 50 Hz	230 V	standard	specificare V_B SA o V_B SD
BN 160...BN 200	400/690 V – 50 Hz	400 V	standard	specificare V_B SA o V_B SD

Switch-pole motors feature a separate power supply line for the brake with rectifier input voltage V_B as indicated in the table below:

(F29)

2/4, 2/6, 2/8, 2/12, 4/6, 4/8 P		2 speed		
	BN_FD V_{mot} ± 10% 3 ~	V_B ± 10% 1 ~	brake connected to terminal board power supply	separate power supply
BN 63...BN 132	400 V – 50 Hz	230 V		specify V_B SA o V_B SD

The diode half-wave rectifier ($VDC \approx 0,45 \times VAC$) is available in versions **NB**, **SB**, **NBR** e **SBR**, as detailed in the table below:



(F30)

	brake	standard	at request
BN 63	FD 02		
BN 71	FD 03 FD 53		
BN 80	FD 04	NB	SB
BN 90S	FD 14		SBR
BN 90L	FD 05		NBR
BN 100	FD 15		
BN 112	FD 06S		
BN 132 - BN 160MR	FD 56 FD 06 FD 07	SB	SBR
BN 160L - BN 180M	FD 08		
BN 180L - BN 200M	FD 09		

(*) $t_{2c} < t_{2r} < t_2$

Rectifier **SB** with electronic energizing control over-energizes the electromagnet upon power-up to cut brake release response time and then switches to normal half-wave operation once the brake has been released.

Use of the **SB** rectifier is mandatory in the event of:

- high number of operations per hour
- reduced brake release response time
- brake is exposed to extreme thermal stress


Rectifiers **NBR** or **SBR** are available for applications requiring quick brake intervention (braking condition reinstatement) response.

These rectifiers complement the **NB** and **SB** types as their electronic circuit incorporates a static switch that de-energizes the brake quickly in the event voltage is missing.

This arrangement ensures short brake release response time with no need for additional external wiring and contacts.

Optimum performance of rectifiers **NBR** and **SBR** is achieved with separate brake power supply.

Versions available: 230Vac $\pm 10\%$, 400Vac $\pm 10\%$, 50/60 Hz (with power supply); 100Vdc $\pm 10\%$, 180Vdc $\pm 10\%$ (with SD option).



8.3 FD brake technical specifications

The table below reports the technical specifications of DC brakes FD.

(F31)

Brake	Brake torque M _b [Nm] springs			Release		Braking		W _{max} per brake operation [J]			W [MJ]	P [W]
	6	4	2	t ₁ [ms]	t _{1s} [ms]	t ₂ [ms]	t _{2c} [ms]	10 s/h	100 s/h	1000 s/h		
FD02	—	3.5	1.75	30	15	80	9	4500	1400	180	15	17
FD03	5	3.5	1.75	50	20	100	12					
FD53	7.5	5	2.5	60	30	100	12	7000	1900	230	25	24
FD04	15	10	5	80	35	140	15	10000	3100	350	30	33
FD14												
FD05	40	26	13	130	65	170	20					
FD15	40	26	13	130	65	170	20	18000	4500	500	50	45
FD06S	60	40	20	—	80	220	25	20000	4800	550	70	55
FD56	—	75	37	—	90	250	20	29000	7400	800	80	65
FD06												
FD07	150	100	50	—	120	200	25	40000	9300	1000	130	65
FD08*	250	200	170	—	140	350	30	60000	14000	1500	230	100
FD09**	400	300	200	—	200	450	40	70000	15000	1700	230	120

* brake torque values obtained with 9, 7 and 6 springs, respectively

t₁ = brake release time with half-wave rectifier

t_{1s} = brake release time with over-energizing rectifier

t₂ = brake engagement time with AC line interruption and separate power supply

** brake torque values obtained with 12, 9 and 6 springs, respectively

t_{2c} = brake engagement time with AC and DC line interruption – Values for t₁, t_{1s}, t₂, t_{2c} indicated in the tab. (F30) are referred to brake set at maximum torque, medium air gap and rated voltage

W_{max} = max energy per brake operation

W = braking energy between two successive air gap adjustments

P_b = brake power absorption at 20 °C

M_b = static braking torque ($\pm 15\%$)

s/h = starts per hour

The brake pad wear depends on the operating/ambient conditions (temperature, humidity, angular speed, specifica pressure); Therefore the declared wear rate must be considered as indicative.

8.4 FD brake connections

On standard single-pole motors, the rectifier is connected to the motor terminal board at the factory. For switch-pole motors and where a separate brake power supply is required, connection to rectifier must comply with brake voltage VB stated in motor name plate.

Because the load is of the inductive type, brake control and DC line interruption must use contacts from the usage class AC-3 to IEC 60947-4-1.




Table (F32) – Brake power supply from motor terminals and AC line interruption

Delayed stop time t_2 and function of motor time constants.

Mandatory when soft-start/stops are required.

Table (F33) – Brake coil with separate power supply and AC line interruption

Normal stop time independent of motor.

Achieved stop times t_2 are indicated in the table (F31).

Table (F34) – Brake coil power supply from motor terminals and AC/DC line interruption.


Quick stop with operation times t_{2c} as per table (F31).

Table (F35) – Brake coil with separate power supply and AC/DC line interruption.


Stop time decreases by values t_{2c} indicated in the table (F31).

The brake may be voltage supplied directly from the motor terminal box (from tab. F32 to tab. F35) only if the nominal voltage of the brake is the same as the smaller voltage of the motor.


(F32)

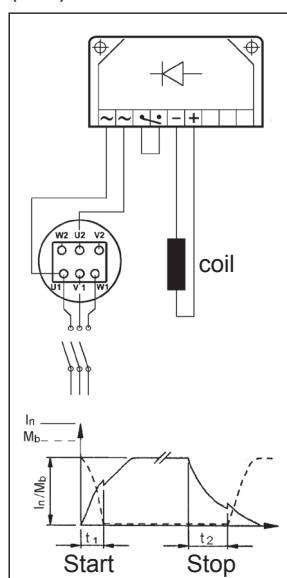


(F33)

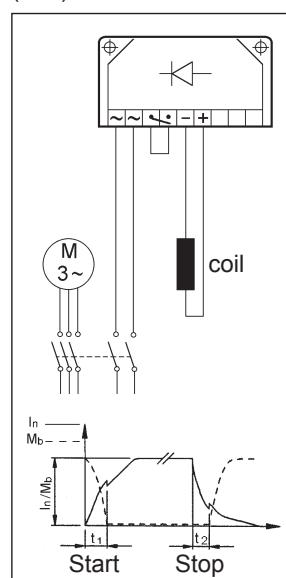


(F34)

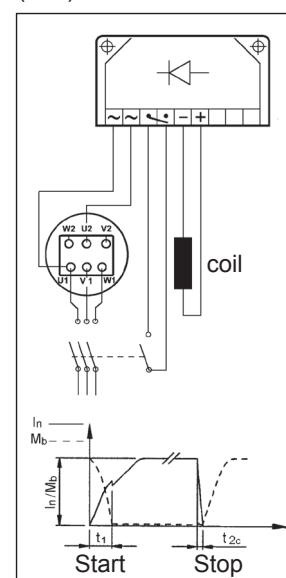

(F35)

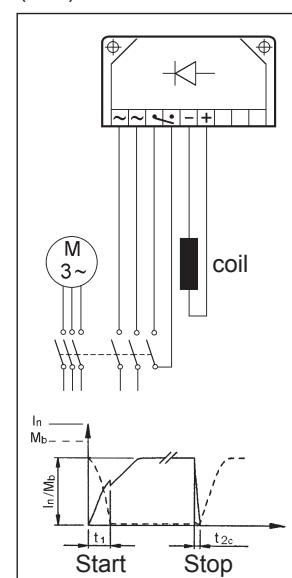




9 AC BRAKE MOTORS TYPE BN_FA


Frame sizes: BN 63 ... BN 180M

(F36)

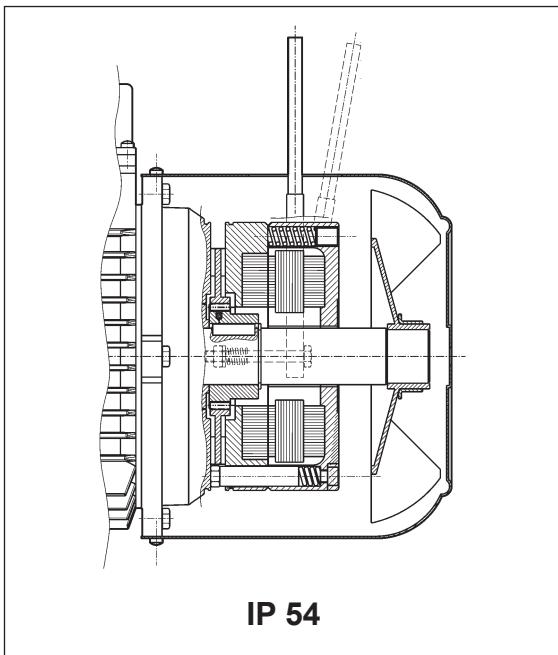

IP 54

(F37)

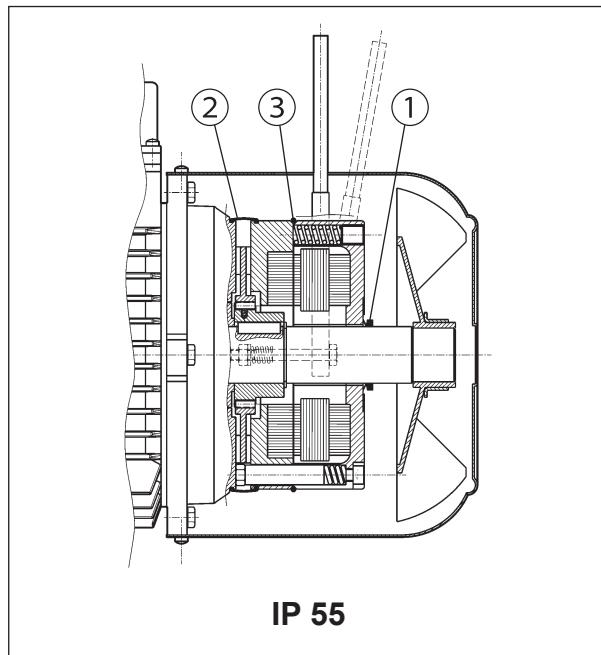

IP 55

Electromagnetic brake operates from three-phase alternated current power supply and is bolted onto conveyor shield. Preloading springs provide axial positioning of magnet body.

Steel brake disc slides axially on steel hub shrunk onto motor shaft with anti-vibration device.

Brake torque factory setting is indicated in the corresponding motor rating charts.

Spring preloading screws provide stepless braking torque adjustment.

Torque adjustment range is $30\% M_{bMAX} < M_b < M_{bMAX}$ (where M_{bMAX} is maximum braking torque as shown in tab. (F39).

Thanks to their high dynamic characteristics, FA brakes are ideal for heavy-duty applications as well as applications requiring frequent stop/start and very fast response time.

Motors may be equipped with manual release lever with automatic return (R) at request. See variant at paragraph "BRAKE RELEASE SYSTEMS" for available release lever locations.


For applications involving lifting and/or high hourly energy dissipation, contact Bonfiglioli's Technical Service.

9.1 Degree of protection

Standard protection class is IP54.

Brake motor FA is also available in protection class **IP55**, which mandates the following variants:

- ① V-ring at N.D.E. of motor shaft
- ② dust and water-proof rubber boot
- ③ O-ring



9.2 FA brake power supply

In single speed motors, power supply is brought to the brake coil direct from the motor terminal box. As a result, brake voltage and motor voltage are the same. In this case, brake voltage indication may be omitted in the designation. Switch-pole motors and motors with separate brake power supply feature an auxiliary terminal board with 6 terminals for connection to brake line. In both cases, brake voltage indication in the designation is mandatory. The following table reports standard AC brake power supply ratings for single- and switch-pole motors:

(F38)

single-pole motor	BN 63...BN 132	BN 160...BN 180
	230Δ / 400Y V ±10% – 50 Hz	400Δ / 690Y V ±10% – 50 Hz
	265Δ / 460Y ±10% - 60 Hz	460Y – 60 Hz
switch-pole motors (separate power supply line)	BN 63...BN 132	BN 160...BN 180
	230Δ / 400Y V ±10% – 50 Hz	460Y – 60 Hz

Unless otherwise specified, standard brake power supply is 230Δ /400Y V - 50 Hz.

Special voltages in the 24...690 V, 50-60 Hz range are available at request.

9.3 Technical specifications of FA brakes

(F39)

Brake	Brake torque M_b [Nm]	Release t_1 [ms]	Braking t_2 [ms]	10 s/h	W_{max} [J]	100 s/h	1000 s/h	W [MJ]	P [VA]
FA 02	3.5	4	20	4500	1400	180	15	60	
FA 03	7.5	4	40	7000	1900	230	25	80	
FA 04	15	6	60	10000	3100	350	30	110	
FA 14									
FA 05	40	8	90	18000	4500	500	50	250	
FA 15									
FA 06S	60	16	120	20000	4800	550	70	470	
FA 06	75	16	140	29000	7400	800	80	550	
FA 07	150	16	180	40000	9300	1000	130	600	
FA 08	250	20	200	60000	14000	1500	230	1200	

M_b = max static braking torque ($\pm 15\%$)

t_1 = brake release time

t_2 = brake engagement time

W_{max} = max energy per brake operation (brake thermal capacity)


W = braking energy between two successive air gap adjustments

P_b = power drawn by brake at 20° (50 Hz)

s/h = starts per hour

NOTE

Values t_1 and t_2 in the table refer to a brake set at rated torque, medium air gap and rated voltage.




The brake pad wear depends on the operating/ambient conditions (temperature, humidity, angular speed, specifica pressure); Therefore the declared wear rate must be considered as indicative.

9.4 FA brake connections

The diagram below shows the wiring when brake is connected directly to same power supply of the motor:


(F40)

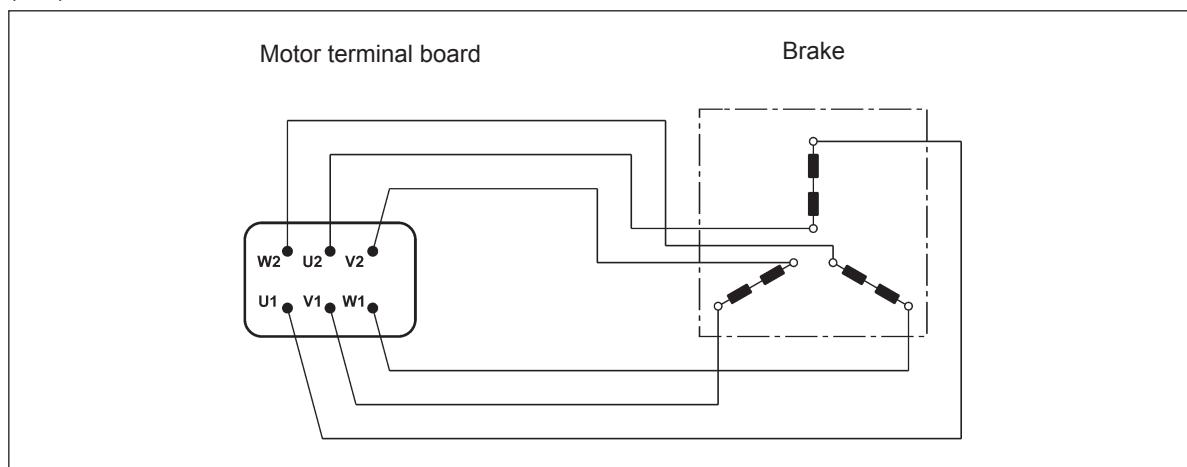


Switch-pole motors and, at request, single-pole motors with separate power supply are equipped with an auxiliary terminal board with 6 terminals for brake connection.

In this version, motors feature a larger terminal box. See diagram below:

(F41)

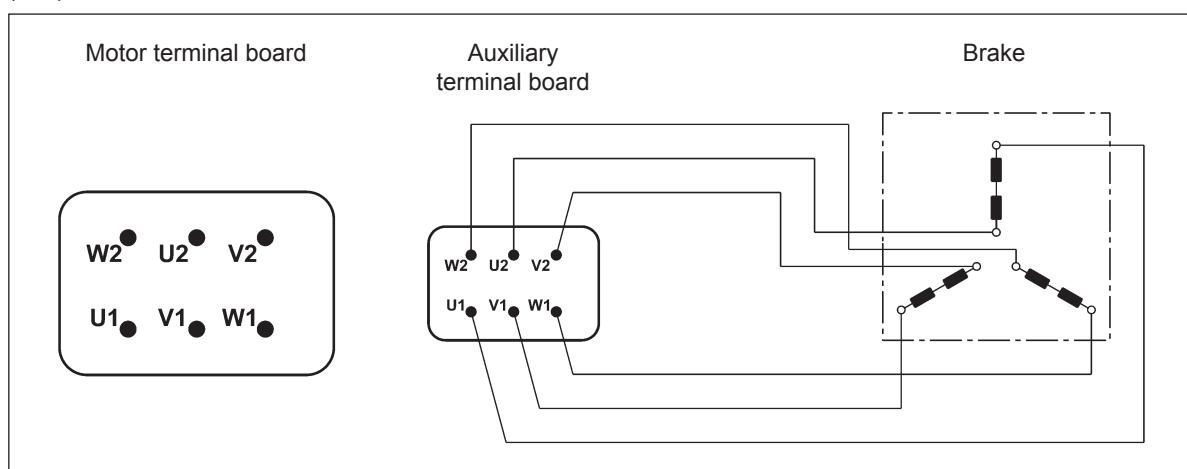




10 BRAKE RELEASE SYSTEMS

Spring-applied brakes type FD and FA may be equipped with optional manual release devices. These are typically used for manually releasing the brake before servicing any machine or plant parts operated by the motor.

(F42)


R

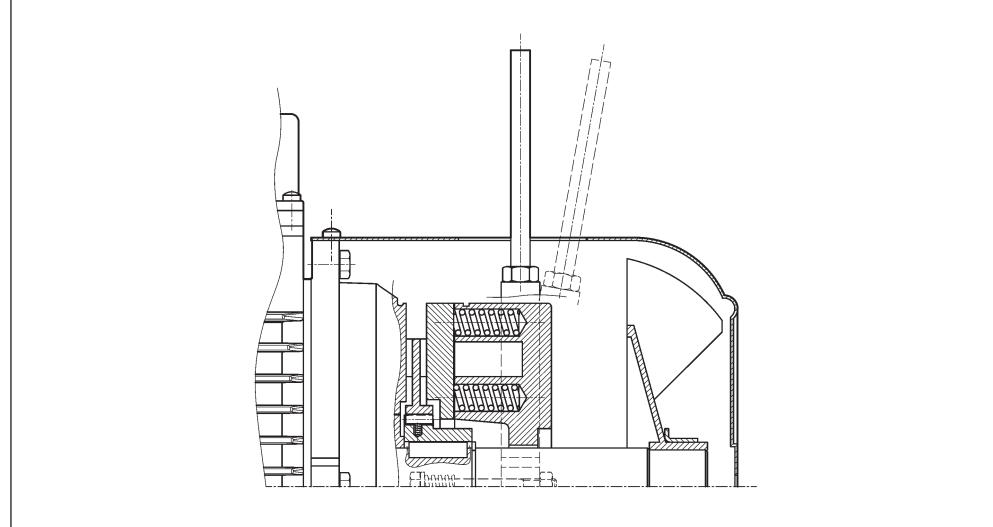


A return spring brings the release lever back in the original position.

(F43)

RM

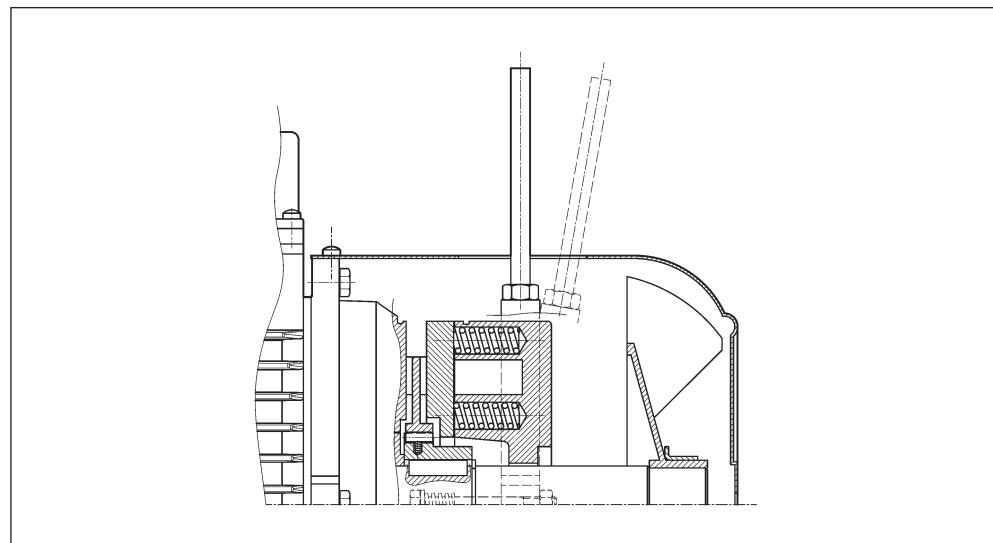

On motors type BN_FD, if the option RM is specified, the release device may be locked in the "release" position by tightening the lever until its end becomes engaged with a brake housing projection. The availability for the various disengagement devices is charted here below:



(F44)


	R	RM
BN_FD	BN 63...BN 200	BN 63 ... BN 132 FD07
BN_FA	BN 63...BN 180M	


10.1 Release lever orientation

Unless otherwise specified, the release lever is located 90° away from the terminal box – identified by letters [AB] in the diagram below – in a clockwise direction on both options **R** and **RM**.

Alternative lever positions **[AA]**, **[AC]** and **[AD]** are also possible when the corresponding option is specified:

(F45)

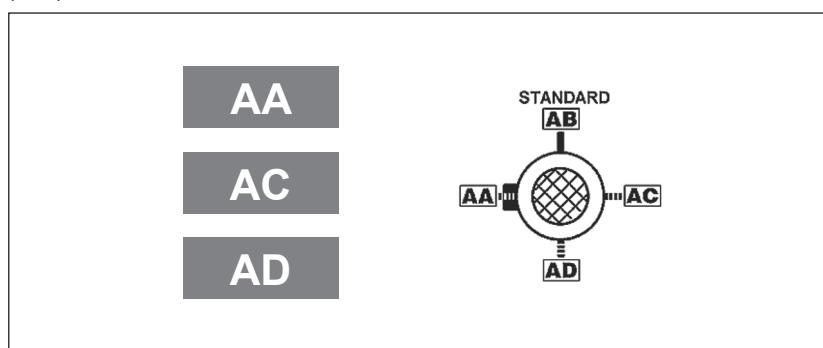



11 OPTIONS

11.1 Soft-start / stop

F1

An optional flywheel - option F1 - is available for applications requiring soft starting or stopping. The flywheel's added inertia uses up kinetic energy during starting and returns it back during braking, thus catering for more progressive and gradual shock loads. The optional flywheel is available for brake motors type BN_FD with specific characteristics as detailed in the table below:

(F46)

Main data for flywheel of motore type: BN_FD, M_FD		
	Fly-wheel weight [Kg]	Fly-wheel inertia [Kgm ²]
BN 63	0.69	0.00063
BN 71	1.13	0.00135
BN 80	1.67	0.00270
BN 90S - BN 90L	2.51	0.00530
BN 100	3.48	0.00840
BN 112	4.82	0.01483
BN 132S - BN 132M	6.19	0.02580

11.2 Capacitive filter

CF

An optional capacitive filter is available for DC brake motors type BN_FD only. When the suitable capacitive filter is installed upstream of the rectifier (option CF), motors comply with the emission limits required by standard EN61000-6-3:2007“ Electromagnetic Compatibility – Generic Emission Standard – Part 6-3: Residential, commercial and light industrial environment”.

11.3 Thermal protective devices

In addition to the standard protection provided by the magneto-thermal device, motors can be supplied with built-in thermal probes to protect the winding against overheating caused, by insufficient ventilation or by an intermittent duty.

This additional protection should always be specified for servo-ventilated motors (IC416).


11.4 Thermistors

E3

These are semi-conductors having rapid resistance variation when they are close to the rated switch off temperature (150 °C).

Variations of the R = f(T) characteristic are specified under DIN 44081, IEC 34-11 Standards.

Positive temperature coefficient thermistors are normally used (also known as PTC “cold conductor resistors”). Thermistors cannot control relays directly and must be connected to a suitable disconnect device. Thus protected, three PTCs connected in series are installed in the winding, the terminals of which are located on the auxiliary terminal-board.



K1

The design characteristics of this sub-group of PTC thermistors allow them to be used as positive temperature coefficient sensors with variable resistance.

Functioning temperature range: 0°C ... +260°C.

Thermistors cannot control relays directly and must be connected to a suitable disconnect device.

Terminals (polarised) for 1 x KTY 84-130 are provided on an auxiliary terminal strip.

11.5 Bimetallic thermostates

D3

These types of protective devices house a bimetal disk. When the rated switch off temperature (150 °C) is reached, the disk switches the contacts from their initial rest position.

As temperature falls, the disk and the contacts automatically return to rest position.

Three bimetallic thermostates connected in series are usually employed, with normally closed contacts. The terminals are located on an auxiliary terminal-board.

11.6 Plug connector

CON

Three types of connectors (CON 1, CON 2, CON 3) are provided; they can be mounted in two different positions: right side of terminal box cover (C1D, C2D, C3D); left side of terminal box cover (C1S, C2S, C3S).

The option CON is applicable to single speed BN motors (2, 4, 6, 8 poles), and BX / BE motors on the sizes specified on the following table. All double speed motors are excluded.

The connectors CON 1 / CON 2 are available for BX, BE and BN motors without brake and for BN brakemotors equipped with DC brake type FD, for the motor sizes listed below.

The male connector (with pins) is mounted on the motor, the female connector is not provided.


With CON option, the winding connection is always Y.

With option U1 "forced ventilation", the fan unit supply is available inside the separate terminal box fixed to fan cover.

With options EN1...EN6, the encoder connection is made by a cable not connected to the motor plug connector.

The CON option is not applicable to brakemotors equipped with AC brake type FA.

The CON option is not available when at least one of the next options are selected: the U2, CUS, IC.



Specifications

(F47)


Option	CON 1
Motor size	BX 80 ... BX 112 / BE 80 ... BE 112 / BN 63 ... BN 112
Connector view	
Type of connector	Harting Han 10ES
Housing	Han EMC 10B with 2 levers
Numbers of pins - nominal current	10 x 16A
Voltage	500 Vac
Contact connection	Screw terminals

(F48)


Option	CON 2
Motor size	BX 80 ... BX 132 / BE 80 ... BE 132M / BN 63 ... BN 132M
Connector view	
Type of connector	Harting Han Modular
Housing	Han EMC 10B with 2 levers
Module type	Module C + Module E + Module E
Numbers of pins - nominal current	3 x 36A / 6 x 16A
Voltage	500 Vac
Contact connection	Crimping contacts

(F49)

Option	CON 3
Motor size	BN 63 ... BN 132M
Connector view	
Type of connector	Harting Han Modular
Housing	Han EMC 10B with 2 levers
Module type	Module C + Module E + Module E
Numbers of pins - nominal current	3 x 36A / 6 + 6 x 16A
Voltage	500 Vac
Contact connection	Crimping contacts



(F50)

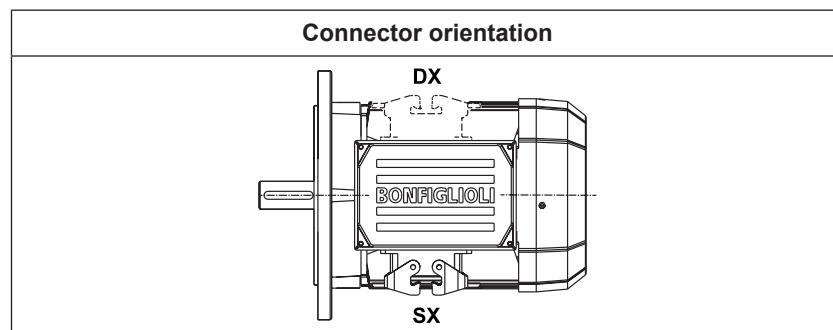

(F51)


Motors without brake dimensions

	AD (mm)	AF (mm)	AH (mm)	LL (mm)	V (mm)
BN 63	136	110	45	165	4.5
BN 71	149	110	45	165	15.5
BX 80 - BE 80 - BN 80	160	110	45	165	16.5
BX 90 - BE 90 - BN 90	162	110	45	165	31.5
BX 100 - BE 100 - BN 100	171	110	45	165	37.5
BX 112 - BE 112 - BN 112	186	110	45	165	39
BX 132 - BE 132 - BN 132	210	140	45	188	45.5
BN 160MR	210	140	45	188	161

(F52)

Motors with FD brake dimensions

	AD (mm)	AF (mm)	AH (mm)	LL (mm)	V (mm)
BN 63	136	110	45	165	4.5
BN 71	149	110	45	165	1.5
BN 80	160	110	45	165	18.5
BN 90	162	110	45	165	39.5
BN 100	171	110	45	165	63.5
BN 112	186	110	45	165	75
BN 132	210	140	45	188	122
BN 160MR	210	140	45	188	161



11.7 Control of brake operation


MSW

The microswitch can be set in order to obtain from it a signal related to the attraction/release of anchor plate, or it can be set in order to give feedback when the air gap reaches the maximum value.

MSW option is available for brakes FD03...FD09.

The microswitch is provided with three lead wires (NC, NO, COM). The next figure shows the main components of the brake equipped with microswitch.

(F53)

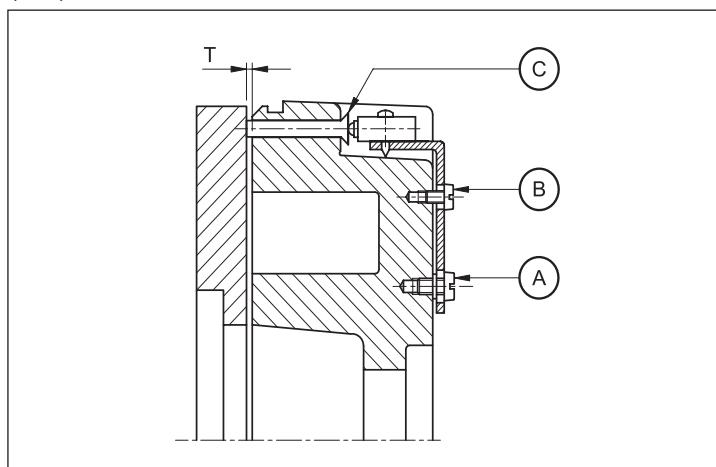

A: Plate fixing screws

B: Setting screws

C: Actuator control pin

11.8 Additional cable entry for brakemotors

IC

The terminal box cover of brakemotors BN63...BN160MR is provided with two additional cable entry M16 x 1.5 (one cable entry per side).

The terminal box cover of brakemotors BN160...BN200 is provided with an additional cable entry M16 x 1.5 next to the cable entry used for the brake.


11.9 Anti-condensation heaters

H1

NH1

Where an application involves high humidity or extreme temperature fluctuation, motors may be equipped with an anti-condensate heater.

A single-phase power supply is available in the auxiliary terminal board inside the main terminal box. Values for the absorbed power are listed here below:



(F54)

	H1 1~ 230V ± 10% P [W]	NH1 1~ 115V ± 10% P [W]
BX 80 BE 80 BN 56 ... BN 80	10	10
BX 90 ... BX 132 BE 90 ... BE 132MB BN 90 ... BN 160MR	25	25
BX 160, BX 180 BE 160, BE 180 BN 160, BN 200	50	50

Warning!

Always remove power supply to the anti-condensante heater before operating the motor.


11.10 Tropicalization**TP**

When option **TP** is specified, motor windings receive additional protection for operation in high humidity and temperature conditions.

11.11 Second shaft extension**PS**


This option is not compatible with variants RC, TC, U1, U2, EN1, EN2, EN3, EN4, EN5, EN6.
For shaft dimensions please see motor dimensions tables.

(F55)

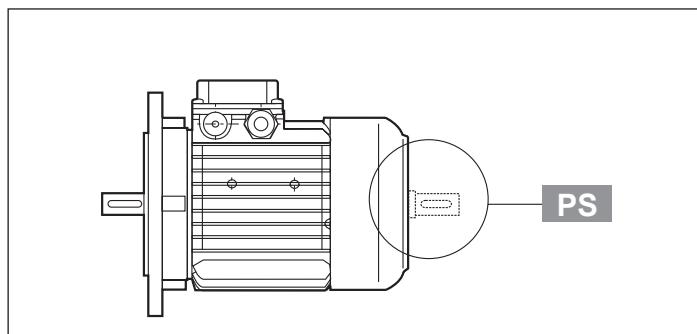**11.12 Rotor balancing****RV**

Where low noise is a priority requirement, the option **RV** ensures reduced vibration in accordance with vibration class B.

The table below reports effective velocity of vibration for normal (A) and B grade balancing.



(F56)

Vibration level	Angular velocity n [min ⁻¹]	Limits of the vibration velocity (mm/s) BX 80 ≤ H ≤ BX 180L BE 80 ≤ H ≤ BE 180L BN 56 ≤ H ≤ BN 200
A	600 < n < 3600	1.6
B	600 < n < 3600	0.70

Values are obtained from measurements on freely suspended motor during no load operation; tolerance ±10%.

11.13 Ventilation

Motors are cooled through outer air blow (IC 411 according to CEI EN 60034-6) and are equipped with a plastic radial fan, which operates in both directions.

Ensure that fan cover is installed at a suitable distance from the closest wall so to allow air circulation and servicing of motor and brake, if fitted.

On request, motors can be supplied with independently power-supplied forced ventilation system starting from BN 71, BE 80 and BX 80 size.

Motor is cooled by an axial fan with independent power supply and fitted on the fan cover (IC 416 cooling system).

This version is used in case of motor driven by inverter so that steady torque operation is possible even at low speed or when high starting frequencies are needed.

Brake motors of motors with rear shaft projection (PS option) are excluded.


This variant has two different models, called **U1** and **U2**, having the same longitudinal size. Longer side of fan cover (**DL**) is specified for both models in the table below. Overall dimension can be reckoned from motor size table.

(F57)

Extra length for servoventilated motors		
	ΔL_1	ΔL_2
BN 71	93	32
BX 80 - BE 80 - BN 80	127	55
BX 90 - BE 90 - BN 90	131	48
BX 100 - BE 100 - BN 100	119	28
BX 112 - BE 112 - BN 112	130	31
BX 132 - BE 132 - BN 132	161	51
BX 160 - BE 160 - BE 180	184	—

ΔL_1 = extra length to LB value of corresponding standard motor.

ΔL_2 = extra length to LB value of corresponding brake motor.
Only for BN motors.




U1

Fan wiring terminals are housed in a separate terminal box.

In brake motors of size BX 132 ... BX 160 - BE 80 ... BE 160 - BN 71 ... BN 160MR, with **U1** model, the release lever cannot be positioned to AA.

The option is not applicable to motors compliant with the CSA and UL norms (option CUS).

(58)


	V a.c. ±10%	Hz	P [W]	I [A]
BN 71			22	0.12
BX 80 - BE 80 BN 80			22	0.12
BX 90 - BE 90 BN 90			40	0.30
BX 100 - BE 100 BN 100			50	0.25
BX 112 - BE 112 BN 112			50	0.26 / 0.15
BX 132 - BE 132 BN 132 ... BN 160MR			110	0.38 / 0.22
BX 160 - BE 160 BN 160M ... BN 180M	3 ~ 230Δ / 400Y	50	180	1.25 / 0.72
BX 180 - BE 180 BN 180L ... BN 200L			250	1.51 / 0.87


U2

Fan terminals are wired in the motor terminal box.

The **U2** option does not apply to motors BX/BE and to motors with option CUS (compliant to norms CSA and UL).

(59)

	V a.c. ±10%	Hz	P [W]	I [A]
BN 71			22	0.12
BN 80			22	0.12
BN 90			40	0.30
BN 100			40	0.26 / 0.09
BN 112	3 ~ 230Δ / 400Y	50 / 60	50	0.26 / 0.15
BN 132 ... BN 160MR			110	0.38 / 0.22



11.14 Rain canopy

RC


The rain canopy protects the motor from dripping and avoids the ingress of solid bodies. It is recommended when motor is installed in a vertical position with the shaft downwards.

Relevant dimensions are indicated in the table below.

The drip cover is not compatible with variants PS, EN1, EN2, EN3, EN4, EN5, EN6.

(60)

	AQ	ΔV
BN 63	118	24
BN 71	134	27
BX 80 - BE 80	152	25
BN 80		
BX 90 - BE 90	168	30
BN 90		
BX 100 - BE 100	190	28
BN 100		
BX 112 - BE 112	211	32
BN 112		
BX 132 - BE 132	254	32
BN 132...BN 160MR		
BX 160 - BE 160	302	36
BN 160M...BN 180M		
BX 180 - BE 180	340	36
BN 180L...BN 200L		



11.15 Textile canopy

TC

Option TC is a cover variant for textile industry environments, where lint may obstruct the fan grid and prevent a regular flow of cooling air.

This option is not compatible with variants EN1, EN2, EN3, EN4, EN5, EN.

Overall dimensions are the same as drip cover type RC.

11.16 Feedback units

Motors may be combined with six different types of encoders to achieve feedback circuits.

Configurations with double-extended shaft (PS) and rain canopy (RC, TC) are not compatible with encoder installation.

EN1


Incremental encoder, $V_{IN} = 5 \text{ V}$, line-driver output RS 422.

EN2

Incremental encoder, $V_{IN} = 10\text{-}30 \text{ V}$, line-driver output RS 422.

EN3

Incremental encoder, $V_{IN} = 12\text{-}30 \text{ V}$, push-pull output 12-30 V



EN4

Encoder sin/cos, $V_{IN} = 4.5\text{-}5.5 \text{ V}$, output Sinus $0.5V_{PP}$.

EN5

Absolute encoder singleturn, HIPERFACE® interface, $V_{IN} = 7\text{-}12 \text{ V}$.

EN6

Absolute encoder multturn, HIPERFACE® interface, $V_{IN} = 7\text{-}12 \text{ V}$.

(F61)

	EN1	EN2	EN3	EN4	EN5	EN6
Interface	TTL/RS 422	TTL/RS 422	HTL/push-pull	Sinus 0.5 VPP	HIPERFACE®	HIPERFACE®
Power supply voltage [V]	4...6	10...30	12...30	4.4...5.5	7...12	7...12
Output voltage [V]	5	5	12...30	—	—	—
No-load operating current [mA]	120	100	100	40	80	80
No. of pulses per revolution				1024		
Steps per revolution	—	—	—	—	15 bit	15 bit
Revolutions	—	—	—	—	—	12 bit
No. of signals	6 (A, B, Z + inverted signals)		6 ($\cos^-, \cos^+, \sin^-, \sin^+, Z, \bar{Z}$)	—	—	—
Max. output frequency [kHz]		600			200	
Max. speed [min^{-1}]			6000 (9000 min^{-1} for 10 s)			
Temperature range [°C]				-30 ... +100		
Protection class				IP 65		


(F62)

EN_ + U1	
	U1
	L3
BX 160 - BE 160 - BN 160M...BN 180M	72
BX 160 - BE 180 - BN 180L...BN 200L	82
BN 160M_FD...BN 180M_FD	35
BN 180L_FD...BN 200L_FD	41

(F63)

EN1, EN2, EN3, EN4, EN5, EN6	
	65 59
BX 80 ... BX 180L - BE 80 ... BE 180L	
BN 63 ... BN 200L	
BN 63_FD ... BN 200L_FD	
BN 63_FA ... BN 200L_FA	

If the encoder device (option EN_) is specified on motors BX 80 ... BX 132 - BE 80 ... BE132 - BN 71 ... BN 160MR, along with the independent fan cooling (options U1, U2), the extra length of motor is coincident with that of the correspondent U1 and U2 execution.



11.17 Surface protection

C_-

When no specific protection class is requested, the painted (ferrous) surfaces of motors are protected to at least corrosivity class C2 (UNI EN ISO 12944-2). For improved resistance to atmospheric corrosion, motors can be delivered with C3 and C4 surface protection.

(F64)

SURFACE PROTECTION	Typical environments	Maximum surface temperature	Corrosivity class according to UNI EN ISO 12944-2
C3	Urban and industrial environments with up to 100% relative humidity (medium air pollution)	120°C	C3
C4	Industrial areas, coastal areas, chemical plant, with up to 100% relative humidity (high air pollution)	120°C	C4

Motors with optional protection to class C3 or C4 are available in a choice of colours. If no specific colour is requested (see the "PAINTING" option) motors are finished in RAL 7042.

Motors can also be supplied with surface protection for corrosivity class C5 according to UNI EN ISO 12944-2. Contact our Technical Service for further details.

11.18 Painting

RAL


Gearboxes with optional protection to class C3 or C4 are available in the colours listed in the following table.

(F65)

PAINTING	Colour	RAL number
RAL7042*	Traffic Grey A	7042
RAL5010	Gentian Blue	5010
RAL9005	Jet Black	9005
RAL9006	White Aluminium	9006
RAL9010	Pure White	9010

* Gearboxes are supplied in this standard colour if no other colour is specified.

NOTE – "PAINTING" options can only be specified in conjunction with "SURFACE PROTECTION" options.



11.19 Certificates

ACM

Certificate of compliance of motors

The document certifies the compliance of the product with the purchase order and the construction in conformity with the applicable procedures of the Bonfiglioli Quality System.

CC


Inspection certificate

The document entails checking on order compliance, the visual inspection of external conditions and instrumental testing of the electrical characteristics in unloaded conditions. Units inspected are sampled within the shipping batch and marked individually.

12 TABLES OF MOTORS CORRELATION

(F66)

Pn [kW]	pole	2		
		IE1	IE2	IE3
	0.06			
	0.09			
	0.12			
	0.18	BN 63A 2		
	0.25	BN 63B 2		
	0.37	BN 71A 2		
	0.55	BN 71B 2		
	0.75	BN 71C 2	BE 80A 2	
		BN 80A 2		
	1.1	BN 80B 2	BE 80B 2	
	1.5	BN 90SA 2	BE 90SA 2	
	1.85	BN 90SB 2		
	2.2	BN 90L 2	BE 90L 2	
	3	BN 100L 2	BE 100L 2	
	4	BN 112M 2	BE 112M 2	
	5.5	BN 132SA 2	BE 132SA 2	
	7.5	BN 132SB 2	BE 132SB 2	
	9.2	BN 132M 2	BE 132MB 2	
	11	BN 160MR 2	BE 160MA 2	
		BN 160M 2		
	15	BN 160MB 2	BE 160MB 2	
	18.5	BN 160L 2	BE 160L 2	
	22	BN 180M 2		
	30	BN 200LA 2		




(F67)

pole		4		
Efficiency class		IE1	IE2	IE3
Pn [kW]	0.06	BN 56A 4		
	0.09	BN 56B 4		
	0.12	BN 63A 4		
	0.18	BN 63B 4		
	0.25	BN 63C 4		
		BN 71A 4		
	0.37	BN 71B 4		
	0.55	BN 71C 4		
		BN 80A 4		
	0.75	BN 80B 4	BE 80B 4	BX 80B 4
	1.1	BN 80C 4	BE 90S 4	BX 90S 4
	BN 90S 4			
	1.5	BN 90LA 4	BE 90LA 4	BX 90LA 4
	1.85	BN 90LB 4		
	2.2	BN 100LA 4	BE 100LA 4	BX 100LA 4
	3	BN 100LB 4	BE 100LB 4	BX 100LB 4
	4	BN 112M 4	BE 112M 4	BX 112M 4
	5.5	BN 132S 4	BE 132S 4	BX 132SB 4
	7.5	BN 132MA 4	BE 132MA 4	BX 132MA 4
	9.2	BN 132MB 4	BE 132MB 4	BX 160MA 4
	11	BN 160MR 4	BE 160M 4	BX 160MB 4
		BN 160M 4		
	15	BN 160L 4	BE 160L 4	BX 160L 4
	18.5	BN 180M 4	BE 180M 4	BX 180M 4
	22	BN 180L 4	BE 180L 4	BX 180L 4
	30	BN 200L 4		

(F68)


pole		6		
Efficiency class		IE1	IE2	IE3
Pn [kW]	0.06			
	0.09	BN 63A 6		
	0.12	BN 63B 6		
	0.18	BN 71A 6		
	0.25	BN 71B 6		
		BN 71C 6		
	0.37	BN 80A 6		
	0.55	BN 80B 6		
	0.75	BN 80C 6	BE 90S 6	
		BN 90S 6		
	1.1	BN 90L 6	BE 100M 6	
	1.5	BN 100LA 6	BE 100LA 6	
	1.85	BN 100LB 6		
	2.2	BN 112M 6	BE 112M 6	
	3	BN 132S 6	BE 132S 6	
	4	BN 132MA 6	BE 132MA 6	
	5.5	BN 132MB 6	BE 160MA 6	
	7.5	BN 160M 6	BE 160MB 6	
	9.2			
	11	BN 160L 6		
	15	BN 180L 6		
	18.5	BN 200LA 6		
	22			
	30			



13 MOTOR RATING CHARTS BX

BX


4 P		1500 min ⁻¹ - S1										50 Hz - IE3		
P _n kW		n min ⁻¹	M _n Nm	I _n 400V A	η% 100% 75% 50%			cos ϕ	I _s I _n	M _s M _n	M _a M _n	KVA code	J _m x 10 ⁻⁴ kgm ²	IM B5 Kg
0.75	BX 80B	4	1425	5.0	1.61	82.5	83.9	83.2	0.81	6.5	2.0	J	35	16
1.1	BX 90S	4	1425	7.4	2.44	84.1	84.1	82.0	0.77	6.9	3.4	J	27	16
1.5	BX 90LA	4	1420	10.1	3.3	85.3	86.2	84.9	0.78	6.3	3.1	J	31	17
2.2	BX 100LA	4	1445	14.5	5.1	86.7	86.2	84.0	0.72	7.2	3.6	K	58	24
3	BX 100LB	4	1445	19.8	6.7	87.7	87.7	86.0	0.74	7.6	3.9	K	73	29
4	BX 112M	4	1445	26	8.1	88.6	88.9	87.6	0.8	8.1	3.8	J	130	38
5.5	BX 132SB	4	1460	36	10.6	89.6	89.2	88.8	0.83	8.2	3.6	J	310	57
7.5	BX 132MA	4	1460	49	15.0	90.4	90.9	90.2	0.80	8.4	3.8	K	360	67
9.2	BX 160MA	4	1465	60	17.8	91.0	92.1	91.7	0.82	7.9	3.6	J	650	95
11	BX 160MB	4	1465	72	20.5	91.4	92.9	92.5	0.84	7.8	3.4	J	780	110
15	BX 160L	4	1465	98	28.1	92.1	93.2	92.6	0.82	9.0	4.1	K	890	121
18.5	BX 180M	4	1480	119	32.9	92.6	94.1	93.1	0.85	11.3	2.6	M	1560	155
22	BX 180L	4	1475	142	38.2	93.0	93.6	92.8	0.88	10.2	2.5	L	1660	163



14 MOTORS DIMENSIONS BX

BX - IM B3


BX

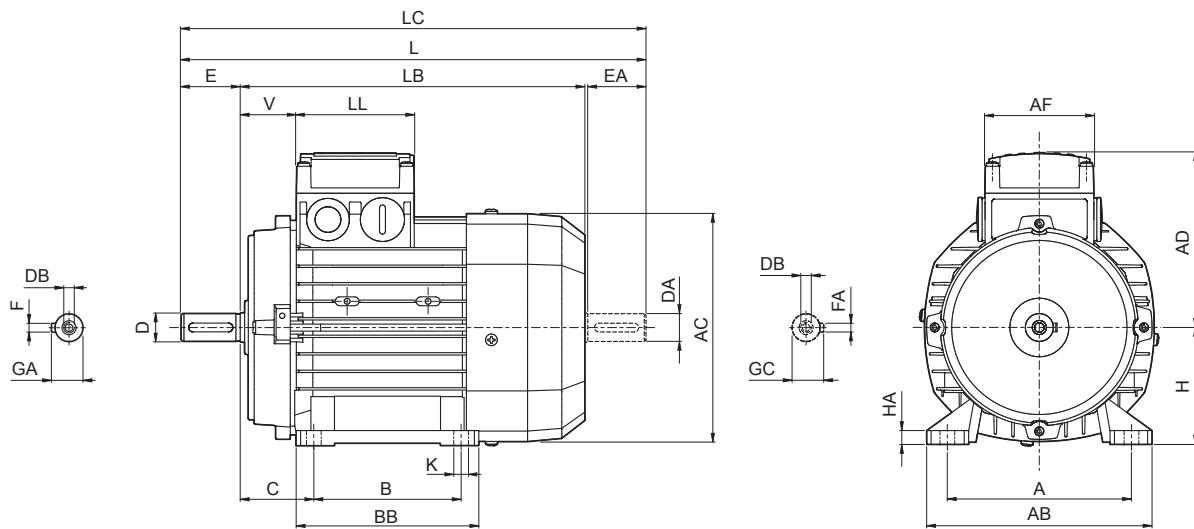

	Shaft					Housing					Motor											
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	
BX 80	19 14 ⁽¹⁾	40 30 ⁽¹⁾	M6 M5 ⁽¹⁾	21,5 16 ⁽¹⁾	6 5 ⁽¹⁾	100	125		124	153		50	80	156	320	280	351	119	74	80	38	
BX 90 S	24 19 ⁽¹⁾	50 40 ⁽¹⁾	M8 M6 ⁽¹⁾	27 21,5 ⁽¹⁾	8 6 ⁽¹⁾		140	8	155	174	10	56	90	176	326	276	368		133		44	
BX 90 L						125																
BX 100	28 24 ⁽¹⁾	60 50 ⁽¹⁾	M10 M8 ⁽¹⁾	31 27 ⁽¹⁾	8 8 ⁽¹⁾	140	160	10	175	192	12	63	100	195	410	350	462	142		98	50	
BX 112							190			224		70	112	219	430	370	482	157				52
BX 132 SB	38 28 ⁽¹⁾	80 60 ⁽¹⁾	M12 M10 ⁽¹⁾	41 31 ⁽¹⁾	10 8 ⁽¹⁾	140		216	12	218	254	12	89	132	258	493	413	556		193	118	
BX 132 MA						178															58	
BX 132 MA																						
BX 160 MA						210			264													
BX 160 MB	42 38 ⁽¹⁾	110 80 ⁽¹⁾	M16 M12 ⁽¹⁾	45 41 ⁽¹⁾	12 10 ⁽¹⁾		254	25		319	14.5	108	160	310	596	486	680		245		51	
BX 160 L						254			304													
BX 180 M	48 42 ⁽¹⁾	110 110 ⁽¹⁾	M16 M16 ⁽¹⁾	51.5 45 ⁽¹⁾	14 12 ⁽¹⁾	241		279	26	291	359	14	121	180	348	708	598	823	261			
BX 180 L						279			329												52	


N.B.:

1) These values refer to the rear shaft end.



BX - IM B5


BX

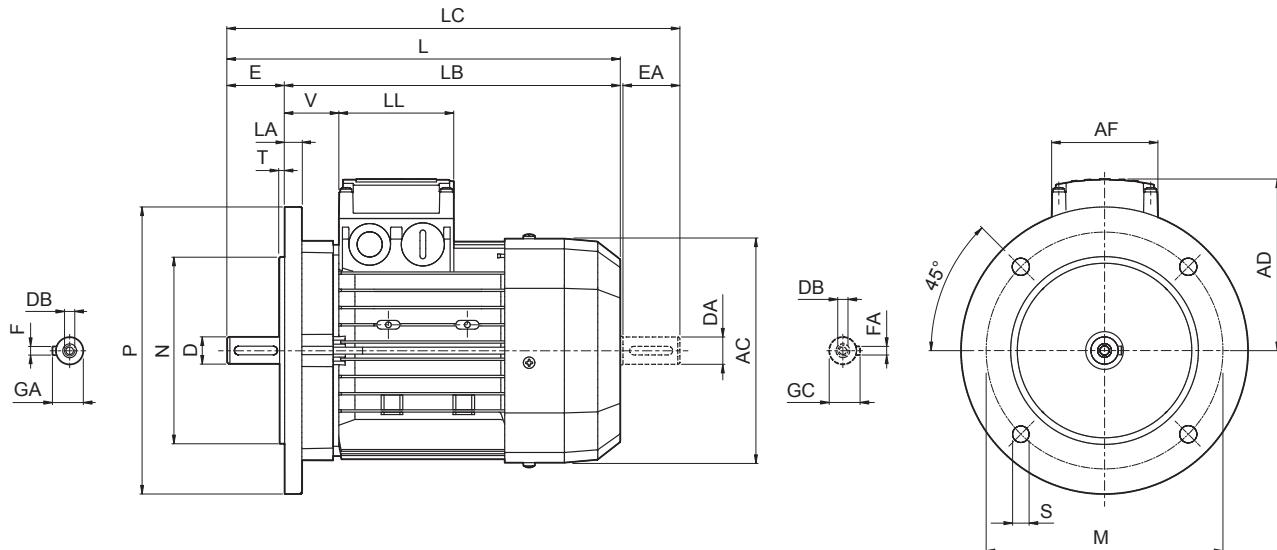

	Shaft					Flange					Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	
BX 80	19 14 ⁽¹⁾	40 30 ⁽¹⁾	M6 M5 ⁽¹⁾	21,5 16 ⁽¹⁾	6 5 ⁽¹⁾	165	130	200	11.5	3.5	11.5	156	320	280	351	119	74	80	38	
BX 90	24 19 ⁽¹⁾	50 40 ⁽¹⁾	M8 M6 ⁽¹⁾	27 21,5 ⁽¹⁾	8 6 ⁽¹⁾	215	180	250	14	4	14	176	326	276	368	133			44	
BX 100	28 24 ⁽¹⁾	60 50 ⁽¹⁾	M10 M8 ⁽¹⁾	31 27 ⁽¹⁾	8 8 ⁽¹⁾	265	230	300			15	195	410	350	462	142	98	98	50	
BX 112											15	219	430	370	482	157			52	
BX 132 SB	38 28 ⁽¹⁾	80 60 ⁽¹⁾	M12 M10 ⁽¹⁾	41 31 ⁽¹⁾	10 8 ⁽¹⁾	300					20	258	493	413	556	193	118	118	58	
BX 132 MA												528	448	591						
BX 160 MA												596	486	680						
BX 160 MB	42 38 ⁽¹⁾	110 80 ⁽¹⁾	M16 M12 ⁽¹⁾	45 41 ⁽¹⁾	12 10 ⁽¹⁾	300	250	350	18.5	5	15	310	640	530	724	245			51	
BX 160 L												18	348	708	598	823	261	187	187	
BX 180 M	48 42 ⁽¹⁾	110 110 ⁽¹⁾	M16 M16 ⁽¹⁾	51.5 45 ⁽¹⁾	14 12 ⁽¹⁾													52		
BX 180 L																				


N.B.:

1) These values refer to the rear shaft end.



BX - IM B14


BX

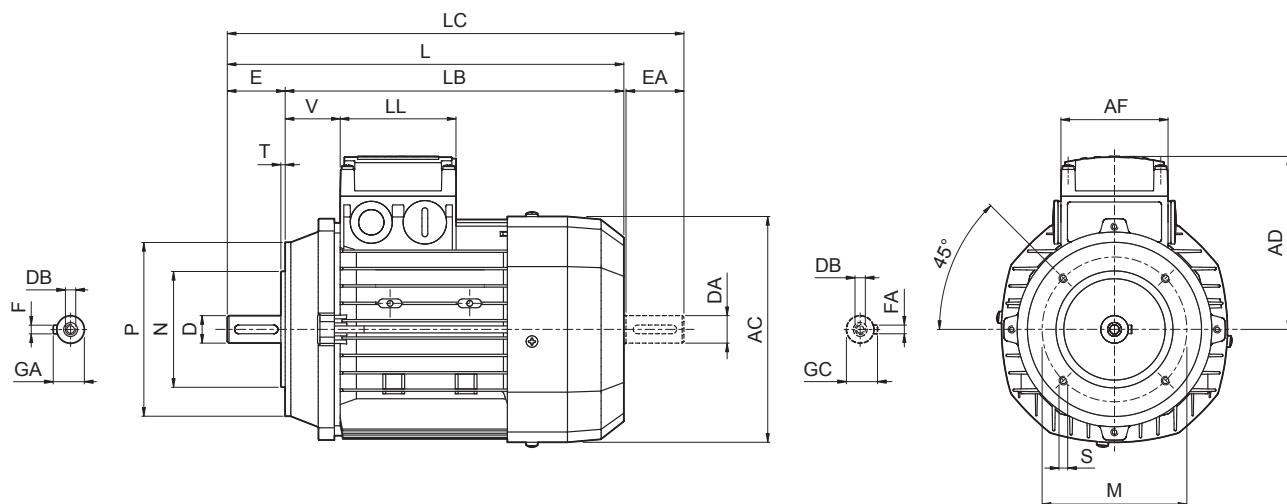

	Shaft					Flange					Motor								
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	
BX 80	19 14 ⁽¹⁾	40 30 ⁽¹⁾	M6 M5 ⁽¹⁾	21,5 16 ⁽¹⁾	6 5 ⁽¹⁾	100	80	120	M6	3	156	320	280	351	119	74	80	38	
BX 90	24 19 ⁽¹⁾	50 40 ⁽¹⁾	M8 M6 ⁽¹⁾	27 21,5 ⁽¹⁾	8 6 ⁽¹⁾	115	95	140			176	326	276	368	133			44	
BX 100	28 24 ⁽¹⁾	60 50 ⁽¹⁾	M10 M8 ⁽¹⁾	31 27 ⁽¹⁾	8 8 ⁽¹⁾	130	110	160	M8	3.5	195	410	350	462	142	98	98	50	
BX 112											219	430	370	482	157			52	
BX 132 SB	38 28 ⁽¹⁾	80 60 ⁽¹⁾	M12 M10 ⁽¹⁾	41 31 ⁽¹⁾	10 8 ⁽¹⁾	165	130	200	M10	4	258	493	413	556	193	118	118	58	
BX 132 MA												528	448	591					

N.B.:

1) These values refer to the rear shaft end.



15 MOTOR RATING CHARTS BE


BE

2 P		3000 min ⁻¹ - S1									50 Hz - IE2	
-----	--	-----------------------------	--	--	--	--	--	--	--	--	-------------	--

P _n kW		n min ⁻¹	M _n Nm	In 400V A	η%			cos φ	I _s I _n	M _s M _n	M _a M _n	J _m x 10 ⁻⁴ kgm ²	IM B5 Kg	
0.75	BE 80A	2	2860	2.5	1.65	80.0	79.6	76.4	0.83	6.8	3.8	3.5	9.0	9.5
1.1	BE 80B	2	2845	3.7	2.35	81.5	82.2	79.9	0.83	6.9	3.8	3.1	11.4	11.3
1.5	BE 90SA	2	2865	5.0	3.2	81.3	80.7	78.1	0.82	6.8	3.6	2.8	12.5	12.3
2.2	BE 90L	2	2870	7.3	4.7	83.2	83.1	80.8	0.82	6.9	3.1	2.9	16.7	14
3	BE 100L	2	2880	9.9	6.2	84.6	84.6	83.7	0.83	7.3	3.5	3.1	39	23
4	BE 112M	2	2920	13.1	8.2	85.8	85.5	84.3	0.82	7.9	3.5	3.1	57	28
5.5	BE 132SA	2	2925	18.0	10.6	87.0	85.0	81.7	0.86	8.5	3.6	3.3	145	42
7.5	BE 132SB	2	2935	24	14.3	88.1	87.4	84.7	0.86	8.8	3.9	3.6	178	53
9.2	BE 132MB	2	2920	30	16.4	88.8	86.5	84.2	0.91	8.4	3.7	3.3	210	65
11	BE 160MA	2	2940	36	20.0	89.4	89.5	88.0	0.89	8.1	3.0	2.9	340	84
15	BE 160MB	2	2950	49	27.2	90.5	90.5	89.5	0.88	8.5	3.0	2.8	420	97
18.5	BE 160L	2	2945	60	32	90.9	90.5	89.8	0.91	7.7	2.9	2.7	490	109

4 P		1500 min ⁻¹ - S1									50 Hz - IE2	
-----	--	-----------------------------	--	--	--	--	--	--	--	--	-------------	--


P _n kW		n min ⁻¹	M _n Nm	In 400V A	η%			cos φ	I _s I _n	M _s M _n	M _a M _n	J _m x 10 ⁻⁴ kgm ²	IM B5 Kg	
0.75	BE 80B	4	1430	5.0	1.65	81.0	80.5	78.0	0.81	6.1	3.2	3.0	28	12.2
1.1	BE 90S	4	1430	7.4	2.53	82.5	82.0	79.5	0.76	6.3	2.9	2.8	28	13.6
1.5	BE 90LA	4	1430	10.0	3.5	83.5	83.0	80.0	0.74	5.9	3.1	3.0	34	15.1
2.2	BE 100LA	4	1430	14.7	4.9	85.4	85.0	84.0	0.76	5.8	3.0	2.8	54	22
3	BE 100LB	4	1420	20	6.6	85.5	86.0	85.5	0.77	5.9	2.8	2.6	61	24
4	BE 112M	4	1440	27	8.3	87.0	87.0	86.0	0.80	6.5	2.8	2.8	105	32
5.5	BE 132S	4	1460	36	11.1	88.5	88.5	87.5	0.81	7.3	2.9	2.9	270	53
7.5	BE 132MA	4	1460	49	14.8	89.0	89.0	88.5	0.82	6.9	2.9	2.8	319	59
9.2	BE 132MB	4	1460	60	18.1	89.5	89.5	88.5	0.82	6.9	2.9	3.0	360	70
11	BE 160M	4	1465	72	21.5	91.0	91.3	90.5	0.81	6.5	2.8	2.6	650	99
15	BE 160L	4	1465	98	28.7	90.8	91.0	90.5	0.83	6.5	2.6	2.3	790	115
18.5	BE 180M	4	1465	121	35	91.6	92.0	91.3	0.83	6.5	2.6	2.5	1250	135
22	BE 180L	4	1465	143	41	91.6	91.8	91.4	0.84	6.8	2.7	2.6	1650	157



BE


6 P	1000 min⁻¹ - S1									50 Hz - IE2			
P _n kW		n min ⁻¹	M _n Nm	I _n 400V A	η% 100% 75% 50%			cos φ	I _s I _n	M _s M _n	M _a M _n	J _m x 10 ⁻⁴ kgm ²	IM B5
0.75	BE 90S 6	935	7.7	2.06	75.9	75.9	73.0	0.69	5.1	3.1	2.9	33	15
1.1	BE 100M 6 (*)	945	11.1	2.75	78.1	76.2	73.0	0.74	4.9	2.2	1.9	82	22
1.5	BE 100LA 6	945	15.2	3.9	79.8	77.5	74.0	0.72	5.6	2.5	2.3	95	24
2.2	BE 112M 6	950	22	5.2	81.8	81.8	79.3	0.74	5.2	2.6	2.3	168	32
3	BE 132S 6	955	30	6.6	83.3	83.3	82.4	0.79	6.1	2.1	1.9	295	44
4	BE 132MA 6	965	40	8.7	84.6	85.0	83.1	0.79	6.9	2.2	2.0	383	56
5.5	BE 160MA 6 (*)	965	54	11.6	87.0	87.0	86.4	0.79	6.6	2.5	2.3	740	83
7.5	BE 160MB 6 (*)	965	74	15.0	88.0	88.0	87.2	0.82	6.6	2.3	2.1	970	103

(*) Power /size relation not standardized



16 MOTORS DIMENSIONS BE

BE - IM B3

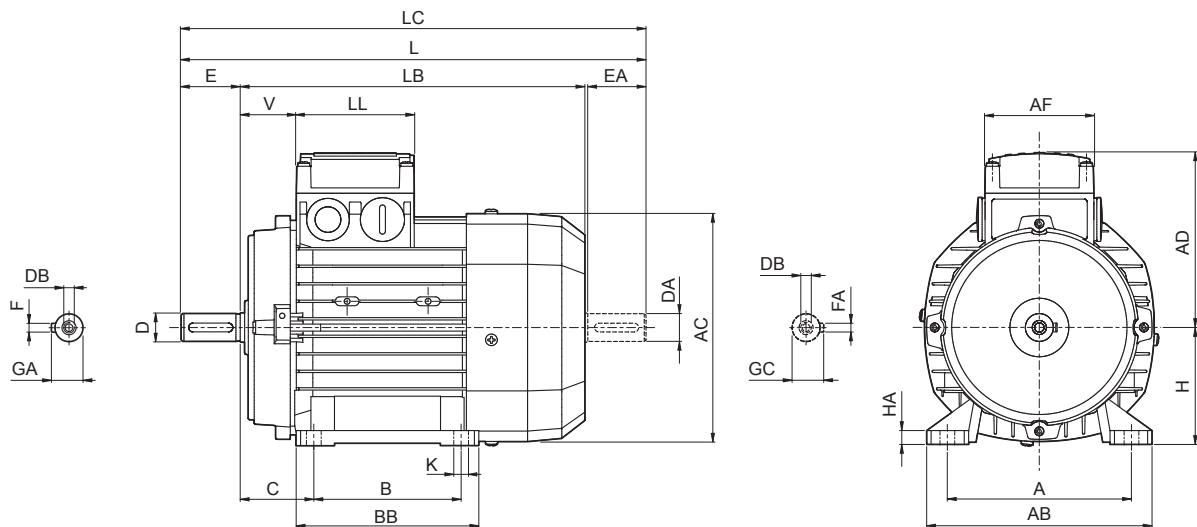


BE

	Shaft					Housing					Motor											
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	
BE 80	19	40	M6	21.5	6		125	8	124	153		50	80	156	274	234	315	119	74	80	38	
BE 90 S	24	50	M8	27		100	140	8	155	174	10	56	90	176	326	276	378	133			44	
BE 90 L						125												98	98			
BE 100	28	60	M10	31		140	160	10	175	192		63	100	195	367	307	429	142			50	
BE 112						140	190			224		70	112	219	385	325	448	157			52	
BE 132 S											12											
BE 132 MA	38	80	M12	41	10	178	216	12	218	254		89	132	258	493	413	576		193	118	118	
BE 132 MB																		528	448	611	58	
BE 160 M	42	110	M16	45	12	210		264				596	486	680					245			51
BE 160 L	38 ⁽¹⁾	80 ⁽¹⁾	M12 ⁽¹⁾	41 ⁽¹⁾	10 ⁽¹⁾	254	254	25	319	14.5	108	160	310	640	530	724			187	187		
BE 180 M	48	110	M16	51.5	14	241		291														
BE 180 L	42 ⁽¹⁾	110 ⁽¹⁾	M16 ⁽¹⁾	45 ⁽¹⁾	12 ⁽¹⁾	279	279	26	359	14	121	180	348	708	598	823	261				52	


N.B.:

1) These values refer to the rear shaft end.



BE - IM B5


BE

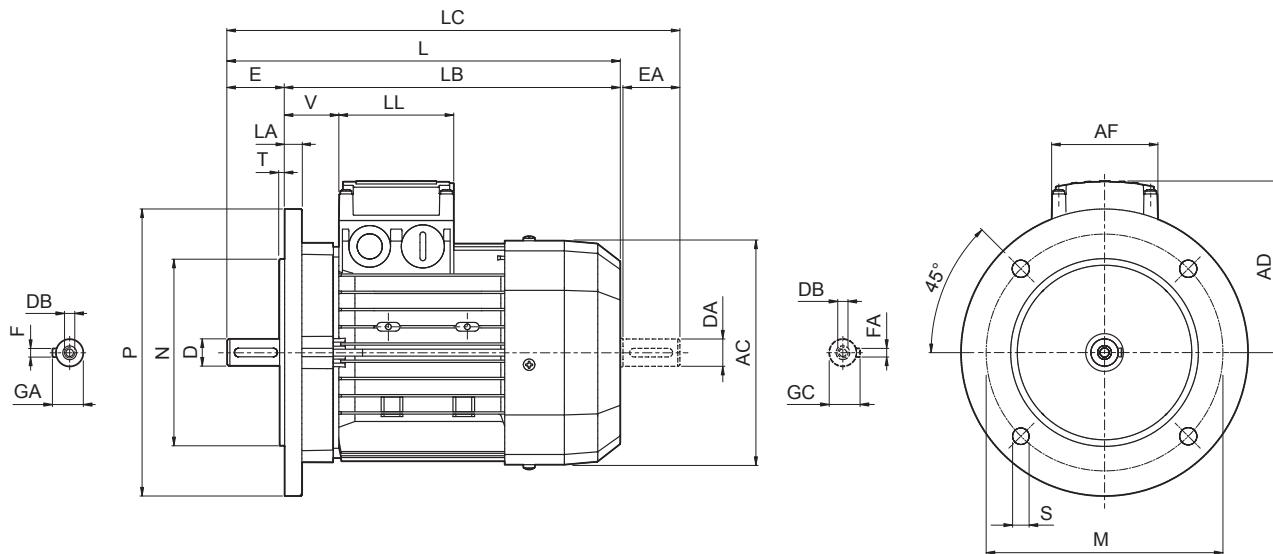


	Shaft					Flange					Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	
BE 80	19	40	M6	21.5	6							156	274	234	315	119	74	80	38	
BE 90 S						165	130	200	11.5	3.5	11.5	176	326	276	378	133				
BE 90 L	24	50	M8	27													98	98	44	
BE 100						215	180	250				14	195	367	307	429	142			50
BE 112	28	60	M10	31								15	219	385	325	448	157			52
BE 132 S												14	258	493	413	576				
BE 132 MA	38	80	M12	41	10	265	230	300				20					193	118	118	58
BE 132 MB													528	448	611					
BE 160 M	42	110	M16	45	12							15	310	596	486	680				51
BE 160 L	38 ⁽¹⁾	80 ⁽¹⁾	M12 ⁽¹⁾	41 ⁽¹⁾	10 ⁽¹⁾	300	250	350	18.5				640	530	724	245				
BE 180 M	48	110	M16	51.5	14							18	348	708	598	823	261	187	187	52
BE 180 L	42 ⁽¹⁾	110 ⁽¹⁾	M16 ⁽¹⁾	45 ⁽¹⁾	12 ⁽¹⁾															

N.B.:

1) These values refer to the rear shaft end.




BE - IM B14

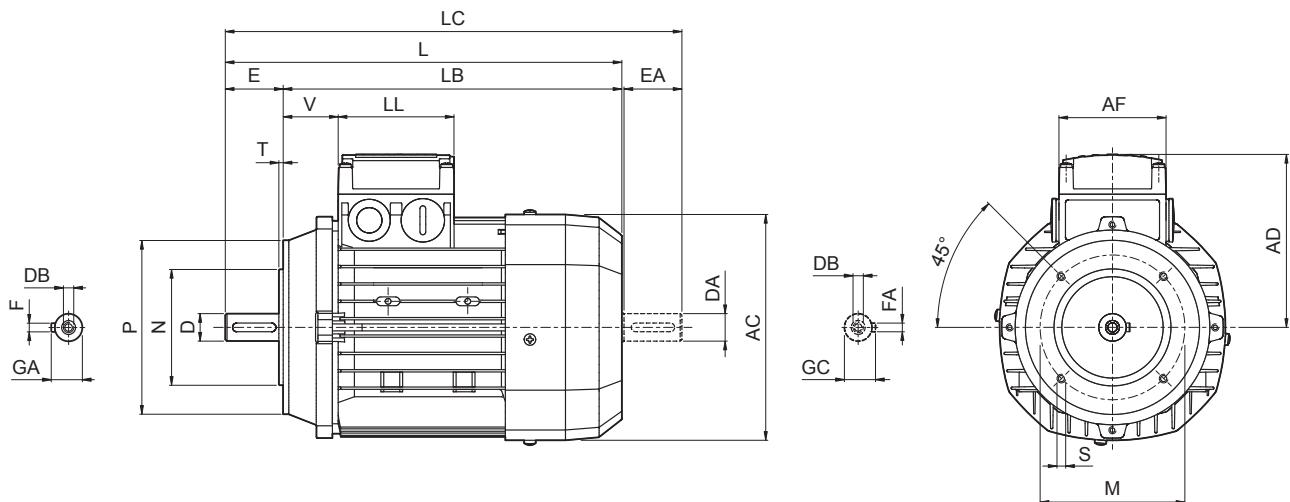

BE

	Shaft					Flange					Motor										
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V			
BE 80	19	40	M6	21.5	6	100	80	120	M6	3	156	274	234	315	119	74	80	38			
BE 90 S	24	50	M8	27	8	115	95	140	M8		176	326	276	378	133	98	98	44			
BE 90 L						130	110	160		3.5	195	367	307	429	142						
BE 100	28	60	M10	31							219	385	325	448	157						
BE 112				493		413	576	4	258	528	448	611	193	118	118	58					
BE 132 S	38	80	M12		41												10				
BE 132 MA				165		130	200		4	258	528	448	611								
BE 132 MB																					




P _n kW		n min ⁻¹	M _n Nm	IE1 (100%)	η (75%)	η (50%)	cosφ	In 400V A	Is In A	Ms Mn	Ma Mn	J _m x 10 ⁴ kgm ²	IM B5 ○ kg	FD				FA				d.c. brake		a.c. brake	
														Mod	Mb	Mod	Mb	Z _o 1/h	J _m x 10 ⁴ kgm ²	FA 02	FA 02	Z _o 1/h	Mb	J _m x 10 ⁴ kgm ²	FA 03
0.18	BN 63A	2	2730	0.63	○	59.9	51.9	0.77	0.56	3.0	2.1	2.0	3.5	FD 02	1.75	3900	4800	2.6	5.2	FA 02	1.75	4800	2.6	5.0	
0.25	BN 63B	2	2740	0.87	○	66.0	64.8	0.76	0.72	3.3	2.3	2.3	3.9	FD 02	1.75	3900	4800	3.0	5.6	FA 02	1.75	4800	3.0	5.4	
0.37	BN 63C	2	2800	1.26	○	69.1	66.8	0.78	0.99	3.9	2.6	2.6	5.1	FD 02	3.5	3600	4500	3.9	6.8	FA 02	3.5	4500	3.9	6.6	
0.37	BN 71A	2	2820	1.25	○	73.8	73.0	0.76	0.95	4.8	2.8	2.6	5.4	FD 03	3.5	3000	4100	4.6	8.1	FA 03	3.5	4200	4.6	7.8	
0.55	BN 71B	2	2820	1.86	○	76.0	75.8	0.76	1.37	5.0	2.9	2.8	6.2	FD 03	5	2900	4200	5.3	8.9	FA 03	5	4200	5.3	8.6	
0.75	BN 71C	2	2810	2.6	○	76.6	76.2	0.76	1.86	5.1	3.1	2.8	5.0	7.3	FD 03	5	1900	3300	6.1	10.0	FA 03	5	3600	6.1	9.7
0.75	BN 80A	2	2810	2.6	●	76.2	75.5	0.81	1.75	4.8	2.6	2.2	8.6	FD 04	5	1700	3200	9.4	12.5	FA 04	5	3200	9.4	12.4	
1.1	BN 80B	2	2800	3.8	●	76.4	76.2	0.81	2.57	4.8	2.8	2.4	9.0	9.5	FD 04	10	1500	3000	10.6	13.4	FA 04	10	3000	10.6	13.3
1.5	BN 80C	2	2800	5.1	●	79.1	79.5	0.81	3.4	4.9	2.7	2.4	11.4	11.3	FD 04	15	1300	2600	13.0	15.2	FA 04	15	2600	13.0	15.1
1.5	BN 90SA	2	2870	5.0	●	82.0	81.5	0.80	3.4	5.9	2.7	2.6	12.5	12.3	FD 14	15	900	2200	14.1	16.5	FA 14	15	2200	14.1	16.4
1.85	BN 90SB	2	2880	6.1	●	82.5	82.0	0.80	4.0	6.2	2.9	2.6	16.7	14	FD 14	15	900	2200	18.3	18.2	FA 14	15	2200	18.3	18.1
2.2	BN 90L	2	2880	7.3	●	82.7	82.1	0.80	4.8	6.3	2.9	2.7	16.7	14	FD 05	26	900	2200	21	20	FA 05	26	2200	21	20.7
3	BN 100L	2	2860	10.0	●	81.5	81.3	0.79	6.7	5.6	2.6	2.2	31	20	FD 15	26	700	1600	35	26	FA 15	26	1600	35	27
4	BN 100LB	2	2870	13.3	●	83.1	83.0	0.80	8.7	5.8	2.7	2.5	39	23	FD 15	40	450	900	43	29	FA 15	40	1000	43	30
4	BN 112M	2	2900	13.2	●	85.5	84.5	0.82	8.2	6.9	3.0	2.9	57	28	FD 06S	40	—	950	66	39	FA 06S	40	950	66	40
5.5	BN 132SA	2	2890	18.2	●	84.7	84.5	0.84	11.2	5.9	2.6	2.2	101	35	FD 06	50	—	600	112	48	FA 06	50	600	112	49
7.5	BN 132SB	2	2900	25	●	86.5	86.3	0.85	14.7	6.4	2.6	2.2	145	42	FD 06	50	—	550	154	55	FA 06	50	550	154	56
9.2	BN 132M	2	2930	30	●	87.0	86.5	0.86	17.7	6.7	2.8	2.3	178	53	FD 56	75	—	430	189	66	FA 06	75	430	189	67
11	BN 160MR	2	2920	36	●	87.6	87.0	0.88	20.6	6.9	2.9	2.5	210	65											
15	BN 160MB	2	2930	49	●	89.6	89.4	0.86	28.1	7.1	2.6	2.3	340	84											
18.5	BN 160L	2	2930	60	●	90.4	90.1	0.89	34	7.6	2.7	2.3	420	97											
22	BN 180M	2	2930	72	●	89.9	89.7	0.88	40	7.8	2.6	2.4	490	109											
30	BN 200LA	2	2930	98	●	90.7	90.1	0.89	54	7.8	2.7	2.9	770	140											

○ = n.a. • = IE1

4P

1500 min⁻¹ - S1

50 Hz




BN

P _n kW		d.c. brake										a.c. brake									
		FD				FA				IM B5		IM B5		IM B5		IM B5					
		n min ⁻¹	M _n Nm	IE1 (100%) %	η (75%) %	η (50%) %	cosφ	In 400V A	Is In	Ms Mn	Ma Mn	J _m x 10 ⁻⁴ kgm ²	J _n x 10 ⁻⁴ kgm ²	Z _o 1/h	Z _o SB	M _b Mod	M _b Mod	M _b Mod	J _m x 10 ⁻⁴ kgm ²		
0.06 BN 56A 4	1340	0.43	○	46.8	44.2	41.3	0.65	0.28	2.6	2.3	2.0	1.5	3.1				1.75	13000	2.6	5.0	
0.09 BN 56B 4	1350	0.64	○	51.7	47.6	42.9	0.60	0.42	2.6	2.5	2.4	1.5	3.1				3.5	13000	3.0	5.4	
0.12 BN 63A 4	1350	0.85	○	59.8	56.2	47.0	0.62	0.47	2.6	1.9	1.8	2.0	3.5	FD 02	3.5	10000	3.0	6.8	10000	3.5	6.6
0.18 BN 63B 4	1320	1.30	○	54.8	52.9	52.5	0.67	0.71	2.6	2.2	2.0	2.3	3.9	FD 02	3.5	7800	10000	3.9			
0.25 BN 63C 4	1340	1.78	○	65.3	65.0	57.9	0.69	0.80	2.7	2.1	1.9	3.3	5.1	FD 02	3.5						
0.25 BN 71A 4	1380	1.73	○	63.7	62.2	59.1	0.73	0.78	3.3	1.9	1.7	5.8	5.1	FD 03	3.5	7700	11000	6.9			
0.37 BN 71B 4	1370	2.6	○	66.8	66.7	63.0	0.76	1.05	3.7	2.0	1.9	6.9	5.9	FD 03	5	6000	9400	8.0			
0.55 BN 71C 4	1380	3.8	○	69.0	68.9	68.8	0.74	1.55	4.1	2.3	2.3	9.1	7.3	FD 03	7.5	4300	8700	10.2			
0.55 BN 80A 4	1390	3.8	○	72.0	71.3	69.7	0.77	1.43	4.1	2.3	2.0	15	8.2	FD 04	10	4100	8000	16.6			
0.75 BN 80B 4	1400	5.1	●	75.0	74.5	69.3	0.78	1.85	4.9	2.7	2.5	20	9.9	FD 04	15	4100	7800	22			
1.1 BN 80C 4	1400	7.5	●	75.5	76.2	70.4	0.78	2.7	5.1	2.8	2.5	25	11.3	FD 04	15	2600	5300	27			
1.1 BN 90S 4	1390	7.6	●	76.5	76.2	72.2	0.77	2.70	4.6	2.6	2.2	21	12.2	FD 14	15	4800	8000	23			
1.5 BN 90LA 4	1410	10.2	●	78.7	78.5	74.9	0.77	3.6	5.3	2.8	2.4	28	13.6	FD 05	26	3400	6000	32			
1.85 BN 90LB 4	1390	12.7	●	78.6	78.9	77.2	0.79	4.3	5.1	2.8	2.6	30	15.1	FD 05	26	3200	5900	34			
2.2 BN 100LA 4	1410	14.9	●	81.1	81.4	79.9	0.75	5.2	4.5	2.2	2.0	40	18	FD 15	40	2600	4700	44	25		
3 BN 100LB 4	1410	20	●	82.6	83.8	83.7	0.77	6.8	5.0	2.3	2.2	54	22	FD 15	40	2400	4400	58	28		
4 BN 112M 4	1430	27	●	84.4	84.2	81.6	0.81	8.4	5.6	2.7	2.5	98	30	FD 06S	60	—	1400	107	40		
5.5 BN 132S 4	1440	36	●	84.7	84.8	82.5	0.81	11.6	5.5	2.3	2.2	213	44	FD 56	75	—	1050	223	57		
7.5 BN 132MA 4	1440	50	●	86.0	86.3	85.3	0.81	15.5	5.7	2.5	2.4	270	53	FD 06	100	—	950	280	66		
9.2 BN 132MB 4	1440	61	●	88.4	88.6	87.5	0.81	18.8	5.9	2.7	2.5	319	59	FD 07	150	—	900	342	75		
11 BN 160MR 4	1440	73	●	87.6	87.8	86.0	0.81	22.4	6.0	2.7	2.5	360	70	FD 07	150	—	850	382	86		
15 BN 160L 4	1460	98	●	88.7	88.5	88.4	0.81	30	6.0	2.3	2.1	650	99	FD 08	200	—	750	129	123		
18.5 BN 180M 4	1460	121	●	89.3	89.5	89.2	0.81	37	6.2	2.6	2.5	790	115	FD 08	250	—	700	865	145		
22 BN 180L 4	1460	144	●	89.9	90.0	90.0	0.80	44	6.4	2.5	2.5	1250	135	FD 09	300	—	400	1450	175		
30 BN 200L 4	1460	196	●	91.4	91.7	91.0	0.80	59	7.1	2.7	2.8	1650	157	FD 09	400	—	300	1850	197		

○ = n.a. • = IE1

P _n kW		n min ⁻¹	M _n Nm	IE1 (100%) %	η (75%) %	η (50%) %	cosφ	In 400V A	Is In A	Ms Mn kgm ²	Ma Mn kgm ²	J _m x 10 ⁻⁴ kgm ²	IM B5 kg	FD			FA			d.c. brake			a.c. brake			
														FD	Mod	Mb Nm	Z _o 1/h	NB	SB	J _n x 10 ⁻⁴ kgm ²	IM B5 kg	Mod	Mb Nm	Z _o 1/h	J _m x 10 ⁻⁴ kgm ²	IM B5 kg
0.09	BN 63A	6	880	0.98	○	41.0	32.9	0.53	0.60	2.1	2.1	1.8	3.4	4.6	FD 02	3.5	9000	14000	4.0	6.3	FA 02	3.5	14000	4.0	6.1	
0.12	BN 63B	6	870	1.32	○	45.0	44.0	41.8	0.60	0.64	2.1	1.9	1.7	3.7	4.9	FD 02	3.5	9000	14000	4.3	6.6	FA 02	3.5	14000	4.3	6.4
0.18	BN 71A	6	900	1.91	○	55.0	55.5	51.0	0.69	0.68	2.6	1.9	1.7	8.4	5.5	FD 03	5	8100	13500	9.5	8.2	FA 03	5.0	13500	9.5	7.9
0.25	BN 71B	6	900	2.70	○	62.0	58.5	51.4	0.71	0.82	2.6	1.9	1.7	10.9	6.7	FD 03	5	7800	13000	12	9.4	FA 03	5.0	13000	12	9.1
0.37	BN 71C	6	910	3.9	○	66.0	60.0	53.3	0.69	1.17	3.0	2.4	2.0	12.9	7.7	FD 03	7.5	5100	9500	14	10.4	FA 03	7.5	9500	14	10.1
0.37	BN 80A	6	910	3.9	○	68.0	67.4	63.3	0.68	1.15	3.2	2.2	2.0	21	9.9	FD 04	10	5200	8500	23	13.8	FA 04	10	8500	23	13.7
0.55	BN 80B	6	920	5.7	○	70.0	69.8	64.3	0.68	1.67	3.9	2.6	2.2	25	11.3	FD 04	15	4800	7200	27	15.2	FA 04	15	7200	27	15.1
0.75	BN 80C	6	920	7.8	●	70.0	70.0	64.4	0.65	2.38	3.8	2.5	2.2	28	12.2	FD 04	15	3400	6400	30	16.1	FA 04	15	6400	30	16.0
0.75	BN 90S	6	920	7.8	●	70.0	69.0	64.2	0.68	2.27	3.8	2.4	2.2	26	12.6	FD 14	15	3400	6500	28	16.8	FA 14	15	6500	28	16.7
1.1	BN 90L	6	920	11.4	●	72.9	72.6	69.1	0.69	3.2	3.9	2.3	2.0	33	15	FD 05	26	2700	5000	37	21	FA 05	26	5000	37	22
1.5	BN 100LA	6	940	15.2	●	75.2	74.2	70.3	0.72	4.0	4.1	2.1	2.0	82	22	FD 15	40	1900	4100	86	28	FA 15	40	4100	86	29
1.85	BN 100LB	6	930	19.0	●	76.6	72.8	62.6	0.73	4.8	4.6	2.1	2.0	95	24	FD 15	40	1700	3600	99	30	FA 15	40	3600	99	31
2.2	BN 112M	6	940	22	●	78.5	79.0	76.5	0.73	5.5	4.8	2.2	2.0	168	32	FD 06S	60	—	2100	177	42	FA 06S	60	2100	177	44
3	BN 132S	6	940	30	●	79.7	77.0	75.1	0.76	7.1	5.1	1.9	1.8	216	36	FD 56	75	—	1400	226	49	FA 06	75	1400	226	50
4	BN 132MA	6	950	40	●	81.4	81.5	79.5	0.77	9.2	5.5	2.0	1.8	295	45	FD 06	100	—	1200	305	58	FA 07	100	1200	318	63
5.5	BN 132MB	6	945	56	●	83.1	80.9	79.1	0.78	12.2	6.1	2.1	1.9	383	56	FD 07	150	—	1050	406	72	FA 07	150	1050	406	74
7.5	BN 160M	6	955	75	●	85.0	85.0	84.8	0.81	15.7	5.9	2.2	2.0	740	83	FD 08	170	—	900	815	112	FA 08	170	900	815	113
11	BN 160L	6	960	109	●	86.4	86.5	85.9	0.81	22.7	6.6	2.5	2.3	970	103	FD 08	200	—	800	1045	133	FA 08	200	800	1045	133
15	BN 180L	6	970	148	●	87.7	88.0	87.3	0.82	30	6.2	2.0	2.4	1550	130	FD 09	300	—	600	1750	170	—	450	1900	185	—
18.5	BN 200LA	6	960	184	●	88.6	88.0	87.3	0.81	37	5.9	2.0	2.3	1700	145	FD 09	400	—	—	—	—	—	—	—	—	


○ = n.a. • = IE1




8P		750 min ⁻¹ - S1		50 Hz	
----	--	----------------------------	--	-------	--

P _n kW	8P 	d.c. brake						a.c. brake											
		FD			FA			FD			FA								
		M _n Nm	n min ⁻¹	η %	cos φ	I _n 400V A	I _s In	M _s Mn	M _a Mn	J _m x 10 ⁻⁴ kgm ²	I _{M B5} kg	Mod	M _b	Z _o 1/h	J _m x 10 ⁻⁴ kgm ²	I _{M B5} kg	M _b	Z _o 1/h	J _m x 10 ⁻⁴ kgm ²
0.09	BN 71A	8	680	1.26	47	0.59	0.47	2.3	2.4	2.3	10.9	6.7	FD 03	3.5	9000	16000	12.0	9.1	
0.12	BN 71B	8	680	1.69	51	0.59	0.58	2.1	2.3	2.2	12.9	7.7	FD 03	5.0	9000	16000	14.0	10.1	
0.18	BN 80A	8	690	2.49	51	0.60	0.85	2.4	2.2	2.2	15	8.2	FD 04	5.0	6500	11000	16.6	12.0	
0.25	BN 80B	8	680	3.51	54	0.63	1.06	2.4	2.0	1.9	20	9.9	FD 04	10.0	6000	10000	10.0	23	
0.37	BN 90S	8	675	5.2	58	0.60	1.53	2.6	2.3	2.1	26	12.6	FD 14	15.0	4800	7500	16.8	13.7	
0.55	BN 90L	8	670	7.8	62	0.60	2.13	2.6	2.2	2.0	33	15	FD 05	26	4000	6400	21	23	
0.75	BN 100LA	8	700	10.2	68	0.63	2.53	3.4	1.9	1.7	82	22	FD 15	26	2800	4800	86	29	
1.1	BN 100LB	8	700	15.0	68	0.64	3.65	3.2	1.7	1.7	95	24	FD 15	40	2500	4000	99	31	
1.5	BN 112M	8	710	20.2	71	0.66	4.6	3.7	1.8	1.9	168	32	FD 06S	60	—	3000	177	44	
2.2	BN 132S	8	710	29.6	75	0.66	6.4	3.8	2.0	2.0	295	45	FD 56	75	2300	305	56	44	
3	BN 132MA	8	710	40.4	76	0.69	8.3	3.9	1.6	1.8	370	53	FD 06	100	—	1900	394	406	

BN



		50 Hz									
		d.c. brake					a.c. brake				
		FD					FA				
P _n kW	■	n min ⁻¹	M _n Nm	η %	cosφ	In 400V A	M _s Mn	M _a Mn	J _m x 10 ⁻⁴ kgm ²	IM B5 Kg	Mod
0.20 0.15	BN 63B 4	2 1350	0.71 1.06	55 49	0.82 0.67	0.64 0.66	3.5 2.6	2.1 1.8	1.9 1.7	4.4 4.4	FD 02 FD 03
0.28 0.20	BN 71A 4	2 1370	0.99 1.39	56 59	0.82 0.72	0.88 0.68	2.9 3.1	1.9 1.8	1.7 1.7	4.7 4.4	FD 03 FD 03
0.37 0.25	BN 71B 4	2 1390	1.29 1.72	56 60	0.82 0.73	1.16 0.82	3.5 3.3	1.8 2.0	1.8 1.9	5.8 5.1	FD 03 FD 03
0.45 0.30	BN 71C 4	2 1400	1.55 2.0	63 63	0.85 0.73	1.21 0.94	3.8 3.6	1.8 2.0	1.8 1.9	6.9 5.9	FD 03 FD 03
0.55 0.37	BN 80A 4	2 1400	1.9 2.5	63 67	0.85 0.79	1.48 1.01	3.9 4.1	1.7 1.8	1.7 1.9	15 15	FD 04 FD 04
0.75 0.55	BN 80B 4	2 1400	2.6 3.8	65 68	0.85 0.81	1.96 1.44	3.8 3.9	1.9 1.7	1.8 1.7	20 17	FD 04 FD 04
1.1 0.75	BN 90S 4	2 1390	3.8 5.2	71 66	0.82 0.79	2.73 2.08	4.7 4.6	2.3 2.4	2.0 2.2	21 28	FD 14 FD 05
1.5 1.1	BN 90L 4	2 1390	5.2 7.6	70 73	0.85 0.81	3.64 2.69	4.5 4.7	2.4 2.5	2.1 2.2	28 22	FD 05 FD 05
2.2 1.5	BN 100LA 4	2 1410	7.5 10.2	72 73	0.85 0.79	5.2 3.8	4.5 4.7	2.0 2.0	1.9 2.0	21 25	FD 14 FD 15
3.5 2.5	BN 100LB 4	2 1420	11.7 16.8	80 82	0.84 0.80	7.5 5.5	5.4 5.2	2.2 2.2	2.1 2.2	61 61	FD 15 FD 15
4 3.3	BN 112M 4	2 1420	13.3 22.2	79 80	0.83 0.80	8.8 7.4	6.1 5.1	2.4 2.1	2.0 2.0	98 —	FD 06S FD 06S
5.5 4.4	BN 132S 4	2 1440	18.2 29	80 82	0.87 0.84	11.4 9.2	5.9 5.3	2.4 2.2	2.0 2.0	— —	FD 56 FD 56
7.5 6	BN 132MA 4	2 1430	25 40	82 84	0.87 0.85	15.2 12.1	6.5 5.8	2.4 2.3	2.0 2.1	270 350	FD 06 FD 06
9.2 7.3	BN 132MB 4	2 1440	30 48	83 85	0.86 0.85	18.6 14.6	6.0 5.5	2.6 2.3	2.2 2.1	319 342	FD 07 FD 07




2/6P		3000/1000 min ⁻¹ - S3 60/40%										50 Hz	
------	--	---	--	--	--	--	--	--	--	--	--	-------	--

P _n kW	n min ⁻¹	d.c. brake										a.c. brake				
		FD					FA					Mod	Mb			
		M _n	η	cosφ	I _n 400V	I _s In	M _a Mn	J _m x 10 ⁻⁴ kgm ²	I _{M B5} Kg	M _b	Nb	Z _o 1/h	Nb	Nm		
0.25	BN 71A	2	2850	0.84	60	0.82	0.73	4.3	1.9	1.8	1500	1700	8.0	8.6		
0.08		6	910	0.84	43	0.70	0.38	2.1	1.4	1.5	10000	13000		2.5		
0.37	BN 71B	2	2880	1.23	62	0.80	1.08	4.4	1.9	1.8	3.5	1000	1300	10.0	3.5	
0.12		6	900	1.27	44	0.73	0.54	2.4	1.4	1.5	9000	11000		11000	9.7	
0.55	BN 80A	2	2800	1.88	63	0.86	1.47	4.5	1.9	1.7	20	9.9	FD 03			
0.18		6	930	1.85	52	0.65	0.77	3.3	2.0	1.9	7.3	FD 03				
0.75	BN 80B	2	2800	2.6	66	0.87	1.89	4.3	1.8	1.6	25	11.3	FD 04	5.0	1800	
0.25		6	930	2.6	54	0.67	1.00	3.2	1.7	1.8			6300		6300	22
1.10	BN 90L	2	2860	3.7	67	0.84	2.82	4.7	2.1	1.9	28	14.0	FD 05	13	1800	
0.37		6	920	3.8	59	0.71	1.27	3.3	1.6	1.6			3800		6000	27
1.5	BN 100LA	2	2880	5	73	0.84	3.53	5.1	1.9	2.0	40	18.3	FD 15	13	1900	
0.55		6	940	5.6	64	0.67	1.85	3.5	1.7	1.8			2900		4000	27
2.2	BN 100LB	2	2900	7.2	77	0.85	4.9	5.9	2.0	2.0	61	25	FD 15	26	700	
0.75		6	950	7.5	67	0.64	2.5	3.3	1.9	1.8			2100		3000	32
3	BN 112M	2	2900	9.9	78	0.87	6.4	6.3	2.0	2.1	98	30	FD 06S	40	1000	
1.1		6	950	11.1	72	0.64	3.4	3.9	1.8	1.8			—		2600	21
4.5	BN 132S	2	2910	14.8	78	0.84	9.9	5.8	1.9	1.8	213	44	FD 56	37	500	
1.5		6	960	14.9	74	0.67	4.4	4.2	1.9	2.0			—		2100	25
5.5	BN 132M	2	2920	18.0	78	0.87	11.7	6.2	2.1	1.9	270	53	FD 56	50	400	
2.2		6	960	22	77	0.71	5.8	4.3	2.1	2.0			—		1900	32


2/8P

3000/750 min⁻¹ - S3 60/40%

50 Hz




P _n kW	Pump Symbol	n min ⁻¹	M _n Nm	η %	cosφ	In 400V A	Is In A	Ms Mn	Ma Mn	J _m x 10 ⁻⁴ kgm ²	IM B5 kg	FD			FA			
											d.c. brake			a.c. brake				
											Mod	Mb	Z _o 1/h SB	Mod	Mb	Z _o 1/h SB		
0.25	BN 71A	2	2790	0.86	61	0.87	0.68	3.9	1.8	1.9	10.9	6.7	FD 03	1.75	1300	1400	12	9.1
0.06		8	680	0.84	31	0.61	0.46	2.0	1.8	1.9			10000	13000		13000		
0.37	BN 71B	2	2800	1.26	63	0.86	0.99	3.9	1.8	1.9	12.9	7.7	FD 03	3.5	1200	1300	14	10.1
0.09		8	670	1.28	34	0.75	0.51	1.8	1.4	1.5			9500	13000		13000		
0.55	BN 80A	2	2830	1.86	66	0.86	1.40	4.4	2.1	2.0	20	9.9	FD 04	5.0	1500	1800	22	13.8
0.13		8	690	1.80	41	0.64	0.72	2.3	1.6	1.7			5600	8000		8000		
0.75	BN 80B	2	2800	2.6	68	0.88	1.81	4.6	2.1	2.0	25	11.3	FD 04	10	1700	1900	27	15.2
0.18		8	690	2.5	43	0.66	0.92	2.3	1.6	1.7			4800	7300		7300		
1.10	BN 90L	2	2830	3.7	63	0.84	3.00	4.5	2.1	1.9	28	14.0	FD 05	13	1400	1600	32	20
0.28		8	690	3.9	48	0.63	1.34	2.4	1.8	1.9			3400	5100		5100		
1.5	BN 100LA	2	2880	5.0	69	0.85	3.69	4.7	1.9	1.8	40	18.3	FD 15	13	1000	1200	44	25
0.37		8	690	5.1	46	0.63	1.84	2.1	1.6	1.6			3300	5000		5000		
2.4	BN 100LB	2	2900	7.9	75	0.82	5.6	5.4	2.1	2.0	61	25	FD 15	26	550	700	65	32
0.55		8	700	7.5	54	0.58	2.5	2.6	1.8	1.8			2000	3500		3500		
3	BN 112M	2	2900	9.9	76	0.87	6.5	6.3	2.1	1.9	98	30	FD 06S	40	—	900	107	40
0.75		8	690	10.4	60	0.65	2.8	2.5	1.6	1.6			—	2900		2900		
4	BN 132S	2	2870	13.3	73	0.84	9.4	5.6	2.3	2.4	213	44	FD 56	37	—	500	223	57
1		8	690	13.8	66	0.62	3.5	2.9	1.9	1.8			—	3500		3500		
5.5	BN 132M	2	2870	18.3	75	0.84	12.6	6.1	2.4	2.5	270	53	FD 06	50	—	400	280	66
1.5		8	690	21	68	0.63	5.1	2.9	1.9	1.9			—	2400		2400		



2/12P		3000/500 min ⁻¹ - S3 60/40%												50 Hz	
-------	--	--	--	--	--	--	--	--	--	--	--	--	--	-------	--

P _n kW	Pictogram	n min ⁻¹	M _n Nm	η %	cosφ	In 400V A	Ms Mn	Ma Mn	IM B5 kg kgm ²	FD		FA		d.c. brake		a.c. brake								
										Mod	Mb Nm	Z _o 1/h SB	J _m x 10 ⁻⁴ kgm ²	IM B5 kg kg	Mod	Mb Nm	Z _o 1/h SB	J _m x 10 ⁻⁴ kgm ²						
0.55 0.09	BN 80B	2 12	2820 430	1.86 2.0	64 30	0.89 0.63	1.39 0.69	4.2 1.8	1.6 1.9	1.7 1.8	25 1.4	11.3 1.6	FD 04 FD 05	5.0 13.00	1000 12000	27 12000	15.1 1300	27 12000						
0.75 0.12	BN 90L	2 12	2790 430	2.6 2.7	56 26	0.89 0.63	2.17 1.06	4.2 1.7	1.8 1.4	1.7 1.6	26 1.4	12.6 1.6	FD 04 FD 05	5.0 13.00	1000 12000	27 12000	15.1 1300	27 12000						
1.10 0.18	BN 100LA	2 12	2850 430	3.7 4.0	65 26	0.85 0.54	2.87 1.85	4.5 1.5	1.6 1.3	1.8 1.5	40 40	18.3 18.3	FD 15 FD 15	13 13	700 700	900 900	44 44	25 25	FA 04 FA 15	13 13	900 900	44 6000	25 6000	
1.5 0.25	BN 100LB	2 12	2900 440	4.9 5.4	67 36	0.86 0.46	3.76 2.18	5.6 1.8	1.9 1.7	1.9 1.8	54 54	22 22	FD 15 FD 15	13 13	700 3800	900 5000	58 58	28 5000	FA 05 FA 15	13 13	900 900	44 58	25 29	
2 0.3	BN 112M	2 12	2900 460	6.6 6.2	74 46	0.88 0.43	4.43 2.19	6.5 2.0	2.1 2.1	2.0 2.0	98 98	30 30	FD 06S FD 06S	20 20	— —	800 3400	107 3400	40 —	FA 06S FA 06	20 37	800 450	107 223	42 58	
3 0.5	BN 132S	2 12	2920 470	9.8 10.2	74 51	0.87 0.43	6.7 3.3	6.8 2.0	2.3 1.7	1.9 1.6	213 270	44 53	FD 56 FD 56	37 37	— —	450 3000	223 400	57 —	FA 06 FA 06	37 37	450 400	223 280	58 67	
4 0.7	BN 132M	2 12	2920 460	13.1 14.5	75 53	0.89 0.44	8.6 4.3	5.9 1.9	2.4 1.7	2.3 1.6	270 2800	53 —	FD 56 FD 56	37 —	— 2800	66 —	37 2800	400 2800	67 2800	FA 06 FA 06	37 37	450 400	223 280	58 67

P _n kW	Pump Symbol	n min ⁻¹	M _n Nm	η %	cosφ	In 400V A	I _s In	M _s M _n	M _a M _n	J _m x 10 ⁻⁴ kgm ²	IM B5 kg	FD			FA			
												d.c. brake			a.c. brake			
												Mod	M _b	Z _o 1/h NB	Mod	M _b	Z _o 1/h SB	
0.22 0.13	BN 71B	4 6	1410 920	1.5 1.4	64 43	0.74 0.67	0.67 0.65	3.9 2.3	1.8 1.6	1.9 1.7	9.1	7.3	FD 03	3.5	2500 5000	3600 9000	10.2	9.7
0.30 0.20	BN 80A	4 6	1410 930	2.0 2.1	61 54	0.82 0.66	0.87 0.81	3.5 3.2	1.3 1.9	1.5 2.0	15	8.2	FD 04	5.0	2500 4000	3100 6000	12.1	12.0
0.40 0.26	BN 80B	4 6	1430 930	2.7 2.7	63 55	0.75 0.70	1.22 0.97	3.9 2.7	1.8 1.5	1.8 1.6	20	9.9	FD 04	10	1800 3600	2300 5500	13.8	13.7
0.55 0.33	BN 90S	4 6	1420 930	3.7 3.4	70 62	0.78 0.70	1.45 1.10	4.5 3.7	2.0 2.3	1.9 2.0	21	12.2	FD 14	10	1500 2500	2100 4100	16.1	16.3
0.75 0.45	BN 90L	4 6	1420 920	5.0 4.7	74 66	0.78 0.71	1.88 1.39	4.3 3.3	1.9 2.0	1.8 1.9	28	14	FD 05	13	1400 2300	2000 3600	20	21
1.1 0.8	BN 100LA	4 6	1450 950	7.2 8.0	74 65	0.79 0.69	2.72 2.57	5.0 4.1	1.7 1.9	1.9 2.1	82	22	FD 15	26	1400 2100	2000 3300	86	86
1.5 1.1	BN 100LB	4 6	1450 950	9.9 11.1	75 72	0.79 0.68	3.65 3.24	5.1 4.3	1.7 2.0	1.9 2.1	95	25	FD 15	26	1300 2000	1800 3000	31	32
2.3 1.5	BN 112M	4 6	1450 960	15.2 14.9	75 73	0.78 0.72	5.7 4.1	5.2 4.9	1.8 2.0	1.9 2.0	168	32	FD 06S	40	—	1600 —	177	29
3.1 2	BN 132S	4 6	1460 960	20	83	0.83	6.5	5.9	2.1	2.0	213	44	FD 56	37	—	1200 —	223	58
4.2 2.6	BN 132MA	4 6	1460 960	27	84	0.82	8.8	5.9	2.1	2.2	270	53	FD 06	50	—	900 —	1900 1500	280 1500




4/8P

1500/750 min⁻¹ - S1


50 Hz

P _n kW		n min ⁻¹	M _n Nm	\eta	cos\phi	In 400V A	Is ln	Ms Mn	Ma Mn	J _m x 10 ⁻⁴ kgm ²	IM B5 Kg	d.c. brake			a.c. brake			
											FD			FA				
											Mod	Mb	Z _o 1/h	Mod	Mb	Z _o 1/h		
0.37	BN 80A	4	1400	2.5	63	0.82	1.03	3.3	1.4	15	8.2	FD 04	10	2300	3500	16.6	12.0	
0.18		8	690	2.5	44	0.60	0.98	2.2	1.5	16	4.500	7000	—	7000	10	3500	16.6	
0.55	BN 80B	4	1390	3.8	65	0.86	1.42	3.8	1.7	20	9.9	FD 04	10	2200	2900	22	13.7	
0.30		8	670	4.3	49	0.65	1.36	2.3	1.7	18	4.200	6500	—	6500	10	2900	22	
0.65	BN 90S	4	1390	4.5	73	0.85	1.51	4.0	1.9	28	13.6	FD 14	15	2300	2800	30	17.8	
0.35		8	690	4.8	49	0.57	1.81	2.5	2.1	22	3.500	6000	—	6000	15	2800	30	
0.9	BN 90L	4	1370	6.3	73	0.87	2.05	3.8	1.8	30	15.1	FD 05	26	1700	2100	34	22	
0.5		8	670	7.1	57	0.62	2.04	2.4	2.1	20	2.500	4200	—	4200	26	2100	34	
1.30	BN 100LA	4	1420	8.7	72	0.83	3.14	4.3	1.7	82	22	FD 15	40	1300	1700	86	28	
0.70		8	700	9.6	58	0.64	2.72	2.8	1.8	95	25	FD 15	40	1200	1700	99	31	
1.8	BN 100LB	4	1420	12.1	69	0.87	4.3	4.2	1.6	1.7	95	25	FD 15	40	1200	1700	99	32
0.9		8	700	12.3	62	0.63	3.3	3.2	1.7	18	1.600	2600	—	2600	40	1700	99	
2.2	BN 112M	4	1440	14.6	77	0.85	4.9	5.3	1.8	168	32	FD 06S	60	—	1200	177	43	
1.2		8	710	16.1	70	0.63	3.9	3.3	1.9	18	—	2000	—	2000	60	1200	177	
3.6	BN 132S	4	1440	24	80	0.82	7.9	6.5	2.1	19	295	45	FD 56	75	—	1000	305	59
1.8		8	720	24	72	0.55	6.6	4.6	1.9	20	—	1400	—	1400	75	1000	305	
4.6	BN 132M	4	1450	30	81	0.83	9.9	6.5	2.2	1.9	383	56	FD 06	100	—	1000	406	74
2.3		8	720	31	73	0.54	8.4	4.4	2.3	20	—	1300	—	1300	100	1000	406	



18 MOTORS DIMENSIONS BN


BN - IM B3

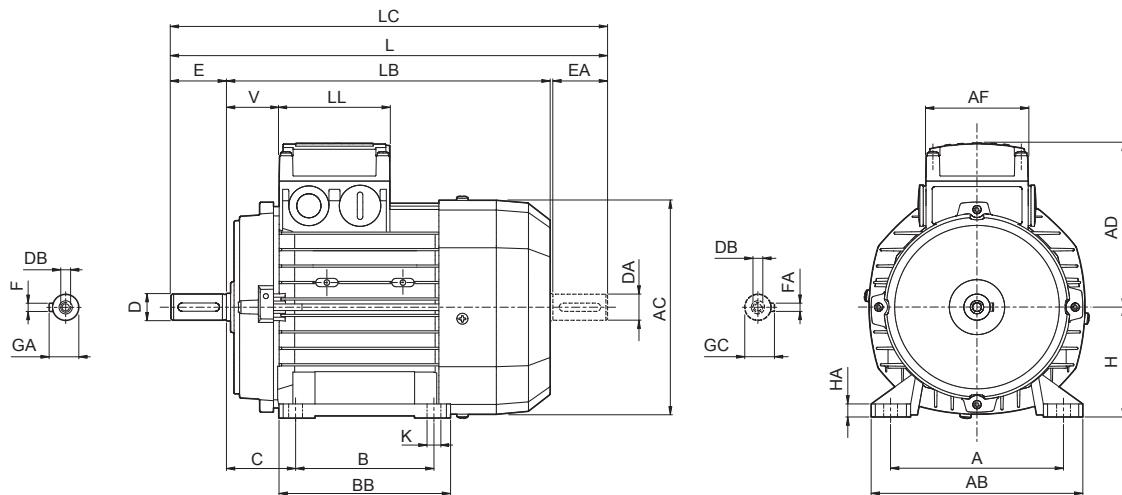


	Shaft					Housing						Motor									
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V
BN 63	11	23	M4	12.5	4	80	100	8	96	120	7	40	63	121	207	184	232	95	74	80	30
BN 71	14	30	M5	16	5	90	112	8	112	135		45	71	138	249	219	281	108			37
BN 80	19	40	M6	21.5	6	100	125	8	124	153	10	50	80	156	273	233	315	119	98	98	38
BN 90 S	24	50	M8	27	8		140	8	155	174		56	90	176	326	276	378	133			44
BN 90 L					125													187	187		
BN 100	28	60	M10	31	8	140	160	10	175	192	12	63	100	195	366	306	429			142	50
BN 112							190					70	112	219	385	325	448	157	261	261	52
BN 132 S	38	80	M12	41	10	178	216	12	218	254	12	89	132	260	493	413	576	193			58
BN 132 M							178												187	187	
BN 160 M	42	110	M16	45	12	210	254	25	264	319	14.5	108	160	310	596	486	680	245	245	51	
BN 160 L							254					304									
BN 180 L	48	110	M16	51.5	14	279	329	359	14	121	180	348	708	598	823	261	261	187	187	52	
BN 200 L	55						305					355	398	18	133	200				64	

NOTE:

1) These values refer to the rear shaft end.



BN - IM B5

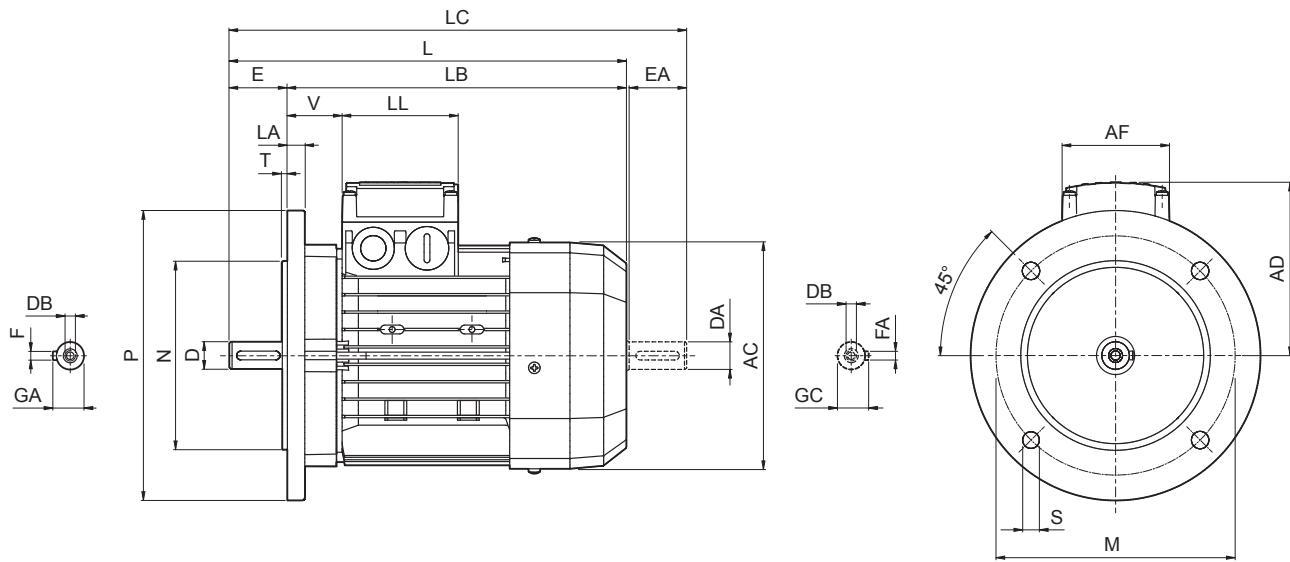


BN


	Shaft					Flange					Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	
BN 56	9	20	M3	10.2	3	100	80	120	7	3	8	110	185	165	207	91	74	80	34	
BN 63	11	23	M4	12.5	4	115	95	140	9.5		121	207	184	232	95	26				
BN 71	14	30	M5	16	5	130	110	160			138	249	219	281	108	37				
BN 80	19	40	M6	21.5	6	165	130	200	11.5	3.5	156	274	234	315	119	74	80	38		
BN 90	24	50	M8	27	176						326	276	378	133	44					
BN 100	28	60	M10	31	8						14	195	367	307	429	142	98	98	50	
BN 112					215	180	250	14	4	15	219	385	325	448	157	52				
BN 132	38	80	M12	41	10	265	230			300	20	258	493	413	576	193	118	118	58	
BN 160 MR	42 38 (1)	110 80 (1)	M16 M12 (1)	45 41 (1)	12 10 (1)	300	250	350	18.5	5	15	310	596	486	680	245	187	187	218	
BN 160 M												562	452	645					51	
BN 160 L	48 38 (1)	110 110 (1)	M16 M12 (1)	51.5 41 (1)	14 10 (1)	310	640	530	724	18	348	708	598	823	261	187	187	52		
BN 180 M																		66		
BN 180 L												722	612	837						
BN 200 L	55 42 (1)	110 110 (1)	M20 M16 (1)	59 45 (1)	16 12 (1)	350	300	400	18	348	708	598	823	261	187	187	187	187	187	

NOTE:

- 1) These values refer to the rear shaft end.




BN - IM B14

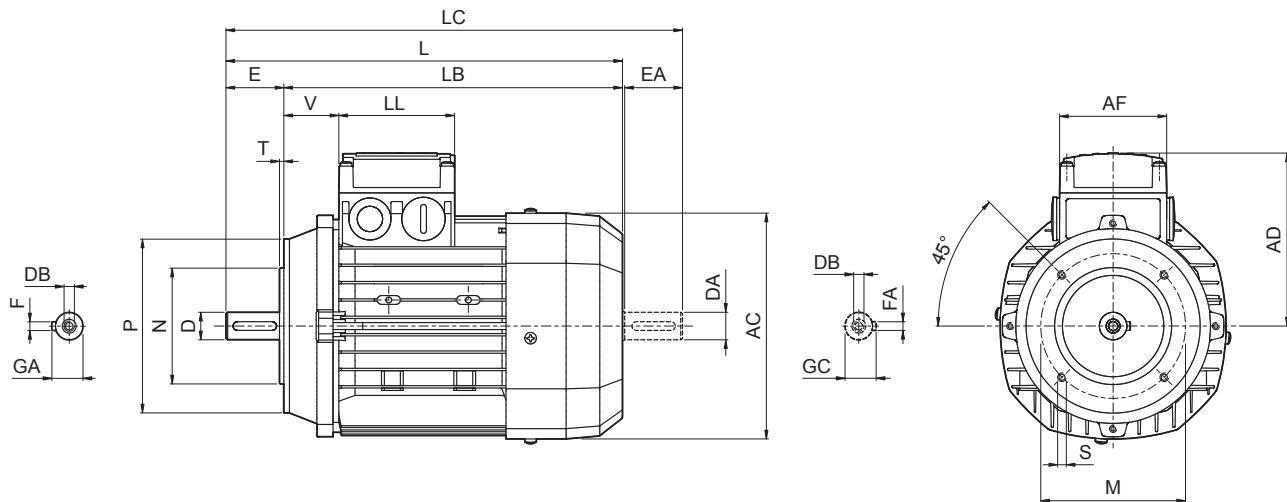


BN

	Shaft					Flange					Motor								
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	
BN 56	9	20	M3	10.2	3	65	50	80	M5	2.5	110	185	165	207	91	74	80	34	
BN 63	11	23	M4	12.5	4	75	60	90			121	207	184	232	95			26	
BN 71	14	30	M5	16	5	85	70	105		M6	138	249	219	281	108			37	
BN 80	19	40	M6	21.5	6	100	80	120			156	274	234	315	119			38	
BN 90	24	50	M8	27	8	115	95	140	M8	3	176	326	276	378	133	98	98	44	
BN 100	28	60	M10	31		130	110	160			195	367	307	429	142			50	
BN 112						3.5	219	385		325	448	157	52						
BN 132	38	80	M12	41	10		165	130	200	M10	258	493	413	576	193	118	118	58	



BN_FD ; IM B3

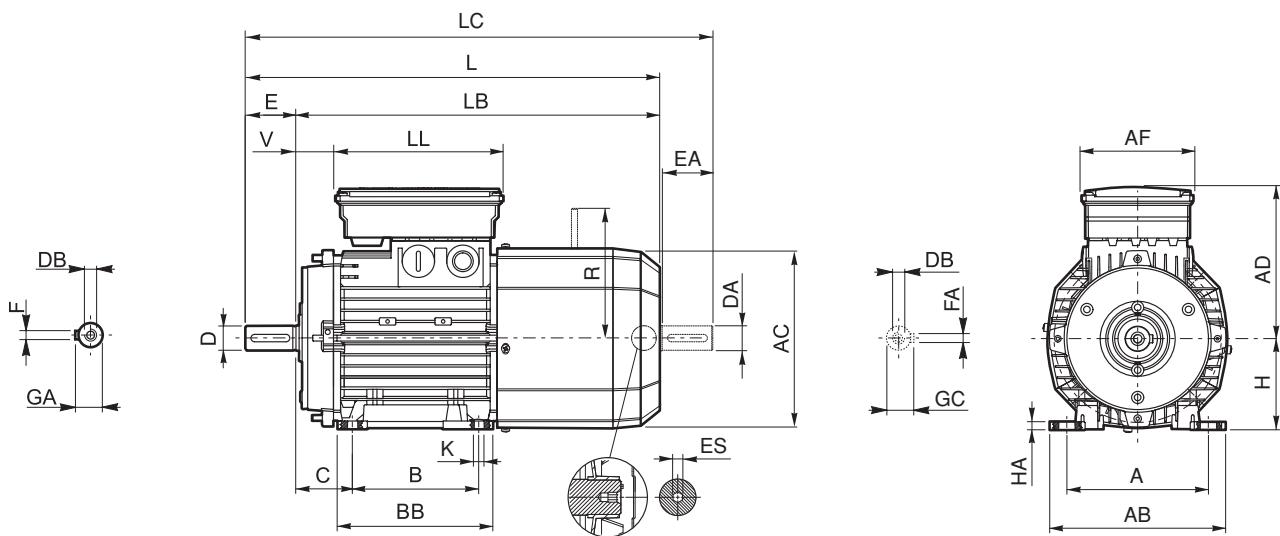

BN

	Shaft					Housing					Motor												
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	R	S
BN 63	11	23	M4	12.5	4	80	100		96	120	7	40	63	121	272	249	297	122			14	96	
BN 71	14	30	M5	16	5	90	112		112	135		45	71	138	310	280	342	135	98	133	25	103	5
BN 80	19	40	M6	21.5	6		125		124	153	8	50	80	156	346	306	388	146			41		
BN 90 S							100														15		
BN 90 L		24	50	M8	27		125		140			155	174								39		
BN 100								160				10	175	192							62		
BN 112		28	60	M10	31		140	190				12	224								73	199	6
BN 132 S									216	12	218	254									204		
BN 132 M		38	80	M12	41	10		178					89	132	260	603	523	686	210	140	188	46	(2)
BN 160 M			42	M16	45	12	210			264											51	266	
BN 160 L		38 (1)	80 (1)	M12 (1)	41 (1)	10 (1)	254	25		319	14.5	108	160	310	736	626	820						
							254			304													
BN 180 L	48	42 (1)	110	M16 (1)	51.5	14	279	279		329	359	14	121	180	348	866	756	981		187	187	52	
BN 200 L	55	42 (1)	110 (1)	M20 M16 (1)	59	16	305	318	26	355	398	18	133	200		878	768	993				64	305


NOTE:

- 1) These values refer to the rear shaft end.
- 2) For FD07 brake value R=226.

ES hexagon is not supplied with PS option.



BN_FD ; IM B5

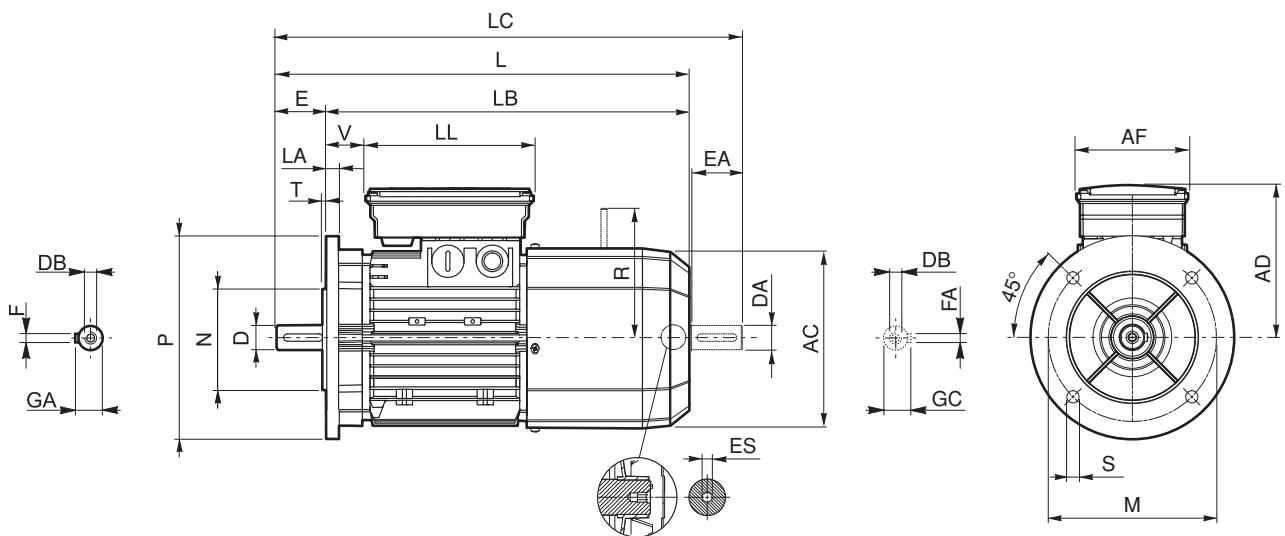


BN

	Shaft					Flange					Motor											
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R	ES	
BN 63	11	23	M4	12.5	4	115	95	140	9.5	3	10	121	272	249	297	122			14	96		
BN 71	14	30	M5	16	5	130	110	160	9.5			138	310	280	342	135	98	133	25	103	5	
BN 80	19	40	M6	21.5	6							156	346	306	388	146			41	129		
BN 90 S	24	50	M8	27		165	130	200	11.5			11.5	176	409	359	461	149		165	39		
BN 90 L													146							146	160	
BN 100						215	180	250			14	195	458	398	521	158	110	165	62			
BN 112	28	60	M10	31							15	219	484	424	547	173		165	73	199		
BN 132	38	80	M12	41	10	265	230	300			20		603	523	686		210	140	46	204 (2)		
BN 160 MR	42	110	M16	45	12							258	672	562	755		210	140	188		161	226
BN 160 M	38 (1)	80 (1)	M12 (1)	41 (1)	10 (1)																	
BN 160 L	42	110	M16	45	12	300	250	350	18.5			310	736	626	820		245			51	266	
BN 180 M	48	80 (1)	M12 (1)	51.5	14								780	670	864			187	187			
BN 180 L	48	110	M16	51.5	14								866	756	981		261			52		
BN 200 L	55	110 (1)	M20	59	16	350	300	400	18.5				878	768	993					64	305	
	42 (1)		M16 (1)	45 (1)	12 (1)																	


NOTE:

- 1) These values refer to the rear shaft end.
- 2) For FD07 brake value R=226.

ES hexagon is not supplied with PS option.



BN_FD ; IM B14

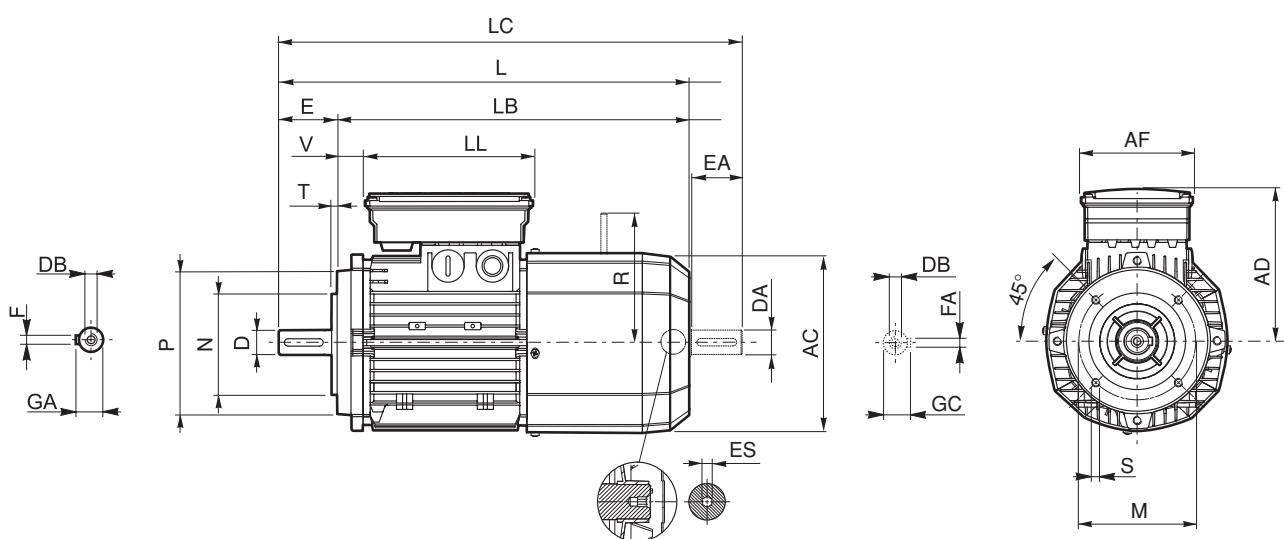


BN

	Shaft					Flange					Motor																	
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R	ES								
BN 63	11	23	M4	12.5	4	75	60	90	M5	2.5	121	272	249	297	122	98	133	14	96	5								
BN 71	14	30	M5	16	5	85	70	105	M6		138	310	280	342	135			25	103									
BN 80	19	40	M6	21.5	6	100	80	120	3	156	346	306	388	146	110	165	41	129	6									
BN 90 S	24	50	M8	27	8	115	95	140		M8		176	409	359			461	149		39	129							
BN 90 L												146	130	110			160	3.5				160						
BN 100	28	60	M10	31								195	458	398			521	158		62	199							
BN 112												219	484	424			547	173										
BN 132	38	80	M12	41	10	165	130	200	M10	4	258	603	523	686	210	140	188	46	204 (1)									


NOTE:

1) For FD07 brake value R=226.

ES hexagon is not supplied with PS option.



BN_FA - IM B3

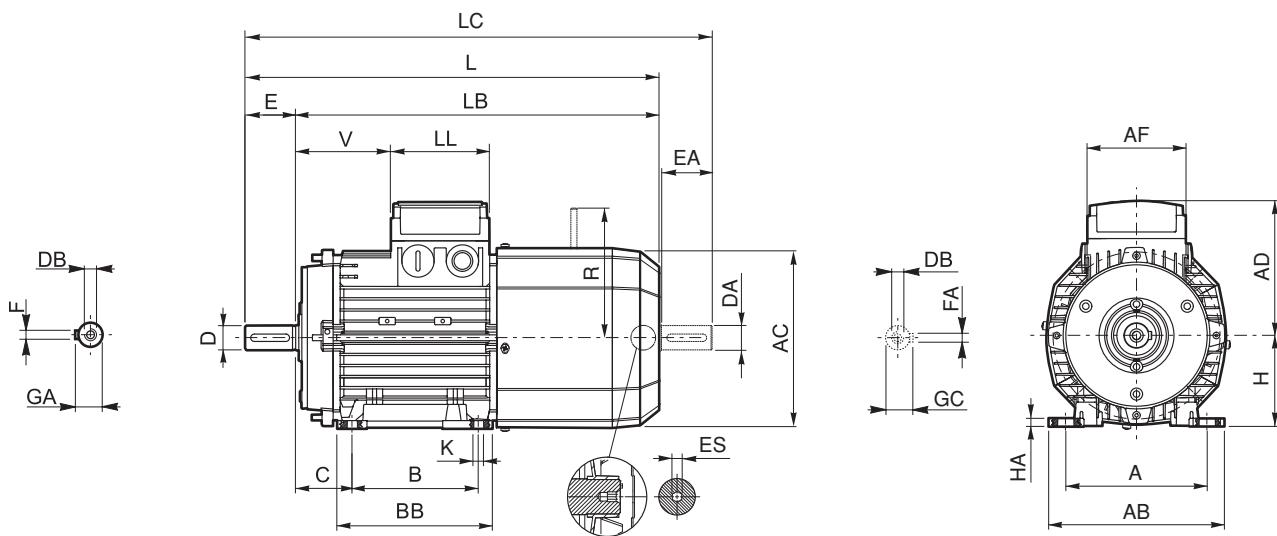

BN


	Shaft					Housing					Motor													
	D DA	E EA	DB	GA GC	F FA	B	A	HA	BB	AB	K	C	H	AC	L	LB	LC	AD	AF	LL	V	R	S	
BN 63	11	23	M4	12.5	4	80	100	96	120		7	40	63	121	272	249	297	95			51	116		
BN 71	14	30	M5	16	5	90	112	112	135			45	71	138	310	280	342	108	74	80	68	124	5	
BN 80	19	40	M6	21.5	6	100	125	124	153		8	50	80	156	346	306	388	119			83			
BN 90 S	24	50	M8	27	8	140	155	174	192		10	56	90	176	409	359	461	133	98	98	71	134	160	
BN 90 L																								
BN 100	28	60	M10	31	8	160	10	175	192		12	63	100	195	458	398	521	142	98	98	95	119	160	6
BN 112																								
BN 132 S	38	80	M12	41	10	216	12	218	254		12	89	132	260	603	523	686	210	140	188	46	200 (2)	128	198
BN 132 M																								
BN 160 M	42 38 (1)	110 80 (1)	M16 M12 (1)	45 41 (1)	12 10 (1)	210	254	25	264	319	14.5	108	160	310	736	626	820	245	187	187	51	247	—	
BN 160 L																								

NOTE:


- 1) These values refer to the rear shaft end.
- 2) For FA07 brake value R=217.

Dimensions AD, AF, LL and V, relevant to terminal box of motors BN...FA featuring the separate brake supply (option SA), are coincident with corresponding dimensions of same-size BN...FD motors

ES hexagon is not supplied with PS option.



BN_FA - IM B5

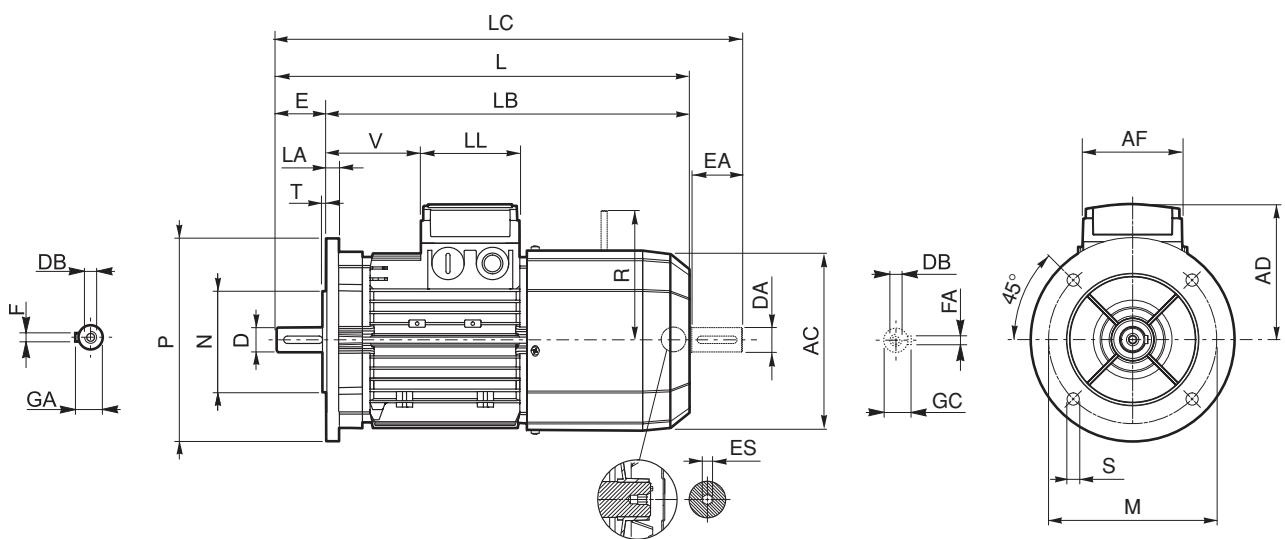

BN


	Shaft					Flange					Motor											
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R	ES	
BN 63	11	23	M4	12.5	4	115	95	140		3		121	272	249	297	95			26	116		
BN 71	14	30	M5	16	5	130	110	160		9.5	10	138	310	280	342	108	74	80	68	124	5	
BN 80	19	40	M6	21.5	6	165	130	200	11.5	3.5		156	346	306	388	119			83	134		
BN 90	24	50	M8	27		215	180	250		8		176	409	359	461	133			95			
BN 100	28	60	M10	31		215	180	250	14	14	195	458	398	521	142	98	98	119				
BN 112											15	219	484	424	547	157			128	198	6	
BN 132	38	80	M12	41	10	265	230	300		20		603	523	686	210	140	188	46	200 (2)			
BN 160 MR											258	672	562	755	193	118	118	218	217			
BN 160 M	42 38 (1)	110 80 (1)	M16 M12 (1)	45 41 (1)	12 10 (1)	300	250	350	18.5	5	15	736	626	820	245	187	187	51	247	—		
BN 160 L												310										
BN 180 M						51.5 41 (1)	14 10 (1)					780	670	864								

NOTE:


- 1) These values refer to the rear shaft end.
- 2) For FA07 brake value R=217.

Dimensions AD, AF, LL and V, relevant to terminal box of motors BN...FA featuring the separate brake supply (option SA), are coincident with corresponding dimensions of same-size BN...FD motors

ES hexagon is not supplied with PS option.



BN_FA - IM B14

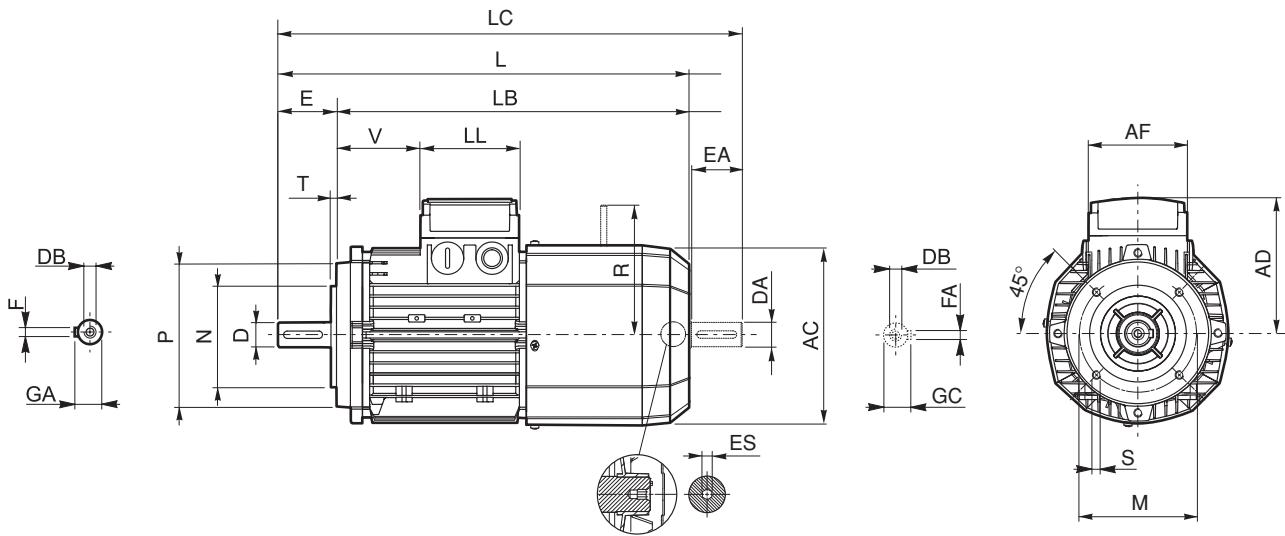

BN


	Shaft					Flange					Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R	ES
BN 63	11	23	M4	12.5	4	75	60	90	M5	2.5	121	272	249	119	95	74	80	26	116	5
BN 71	14	30	M5	16	5	85	70	105	M6		138	310	280	342	108			68	124	
BN 80	19	40	M6	21.5	6	100	80	120	M8	3	156	346	306	388	119	95	98	83	134	6
BN 90	24	50	M8	27	8	115	95	140			176	409	359	461	133			160	119	
BN 100	28	60	M10	31		130	110	160	M8	3.5	195	458	398	521	142	128	188	128	198	
BN 112						219	484	424			547	157								
BN 132	38	80	M12	41	10	165	130	200	M10	4	258	603	523	686	210	140	188	46	200 (1)	


NOTE:

1) For FA07 brake value R=217.

Dimensions AD, AF, LL and V, relevant to terminal box of motors BN...FA featuring the separate brake supply (option SA), are coincident with corresponding dimensions of same-size BN...FD motors

ES hexagon is not supplied with PS option.

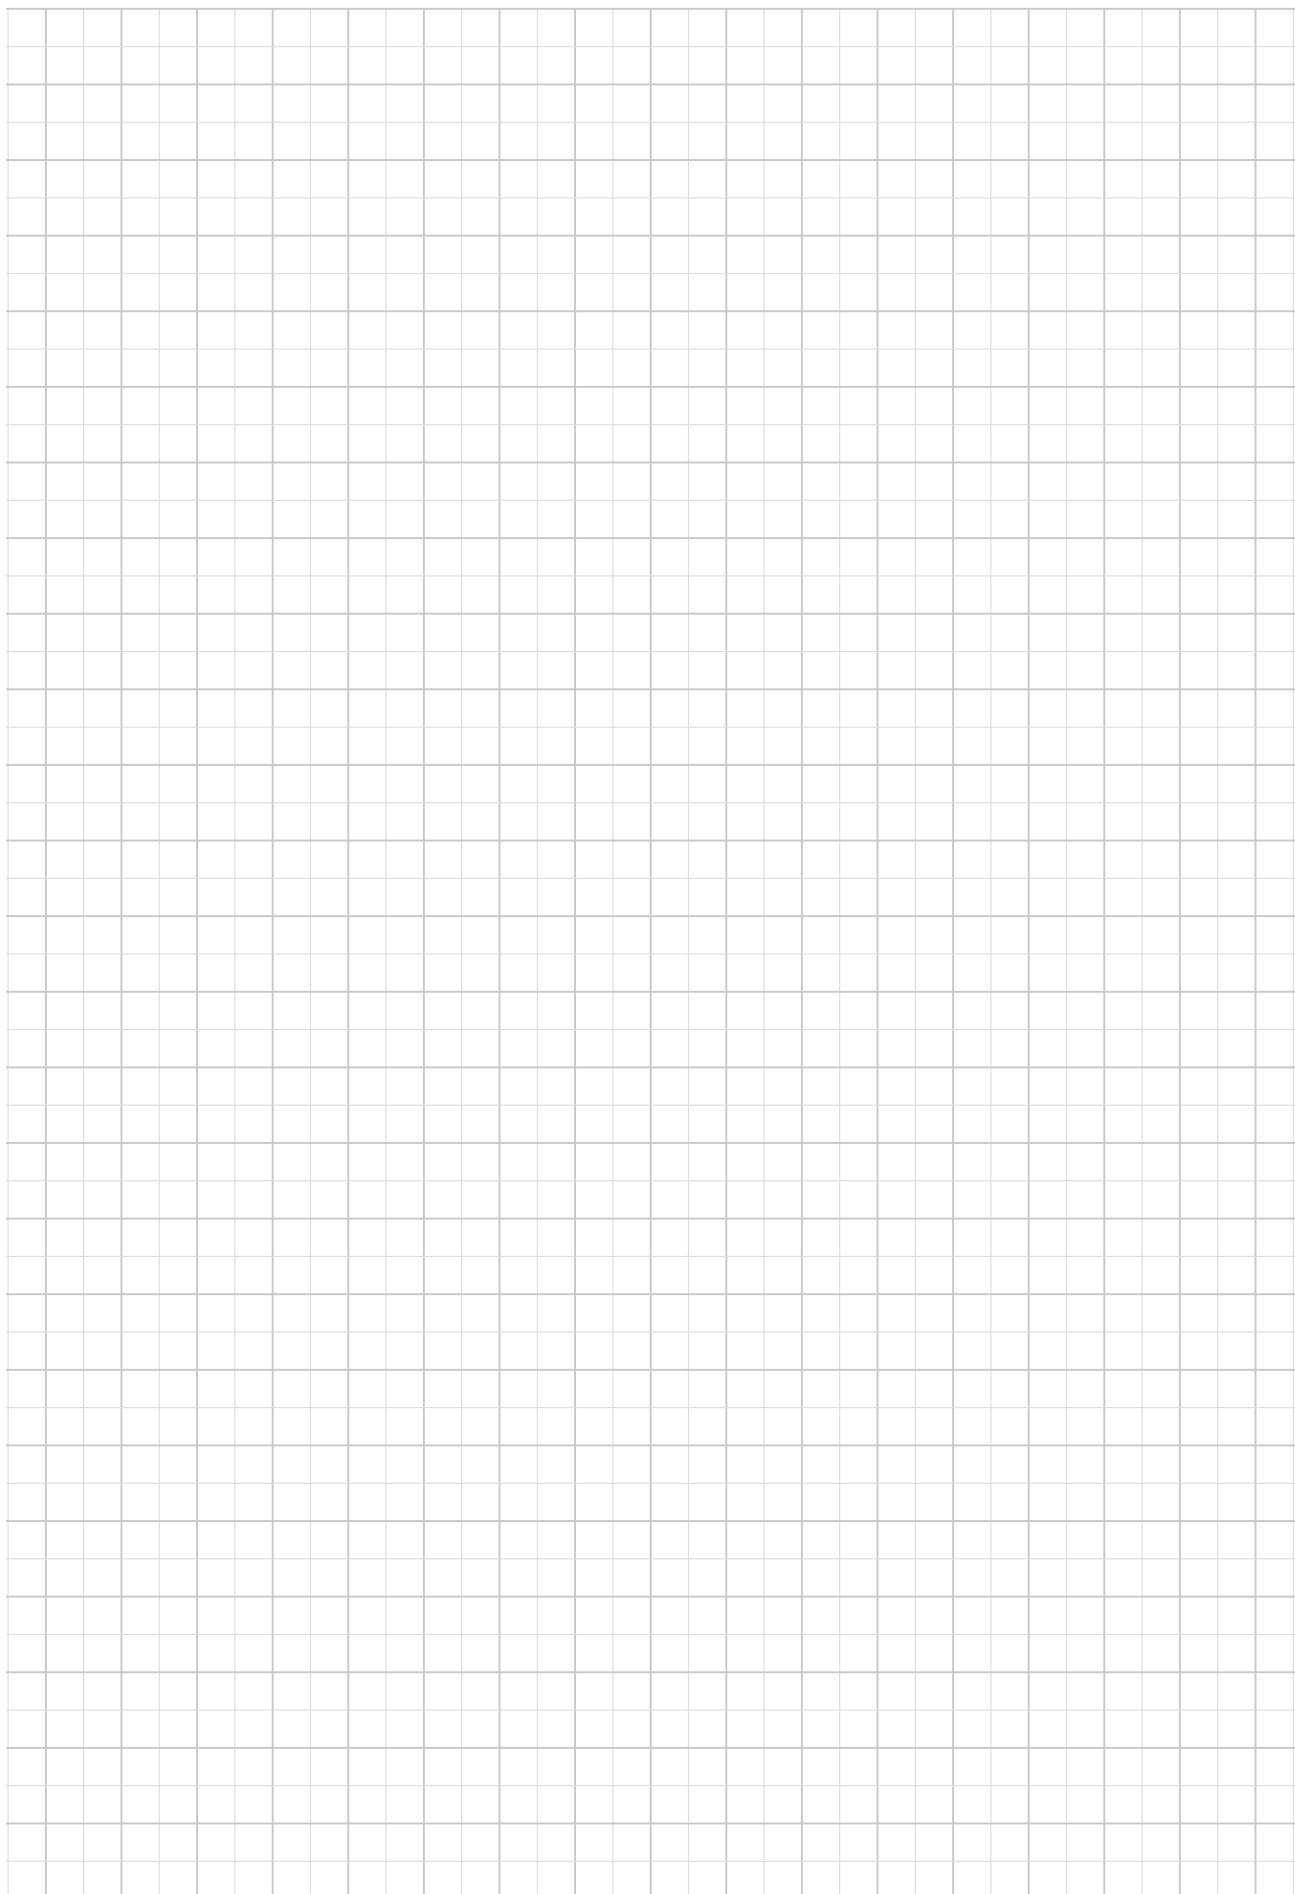



INDEX OF REVISIONS

BR_CAT_BNEX_STD_ENG_R02_1	
	Description
28, 38	Amended tables for rectifier and specifications CON option

160930

This publication supersedes and replaces any previous edition and revision. We reserve the right to implement modifications without notice.

This catalogue cannot be reproduced, even partially, without prior consent.