



Measuring and Control

LM4A-2IO-M

Analogue and digital
signals centralizer



C CIRCUTOR

Tecnology for energy efficiency


Main features

The **LM4A-2IO-M** is an analogue and digital signals centralizer. In only 4 DIN modules, the unit has 2 relay outputs and centralizes 4 analogue inputs from 0 ... 20 mA, 2 voltage-free digital input. The unit includes an RS-485 communications bus with a Modbus/RTU protocol, which allows real time control by communications. The unit is compatible with **PowerStudio** and **PowerStudio SCADA** control software.

Control


Telemanagement of the 2 digital outputs:

- Open relay function
- Closed relay function
- Impulse function

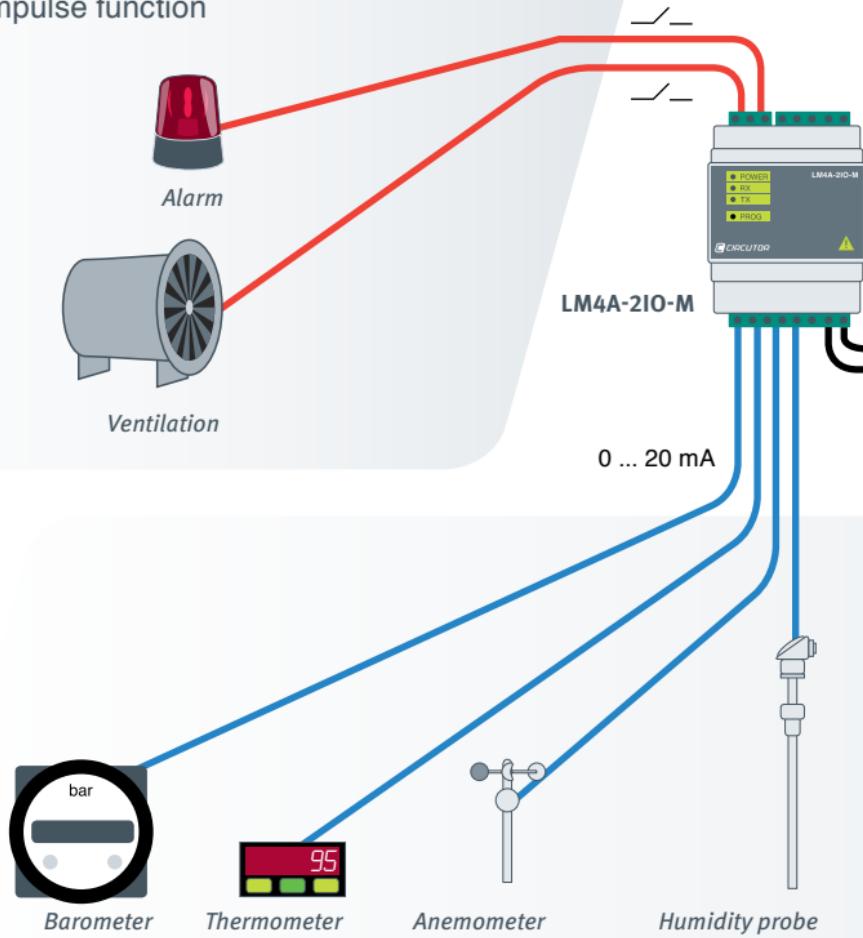

Management

The **LM4A-2IO-M** enables to easily monitor and remotely control any industrial process signal thanks to the **PowerStudio / PowerStudio SCADA** energy management software.

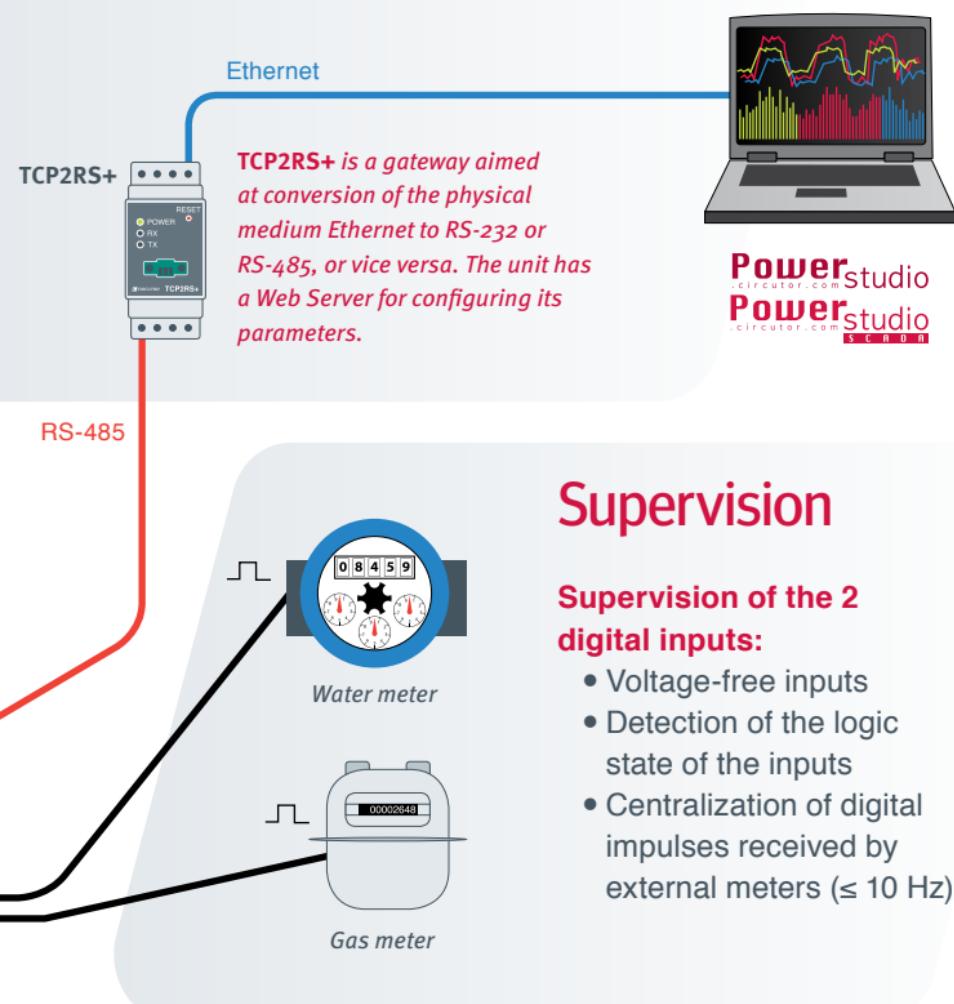

Supervision

Supervision of the 2 digital inputs:

- Voltage-free inputs
- Detection of the logic state of the inputs
- Centralization of digital impulses received by external meters (≤ 10 Hz)

Display

Monitoring of the 4 analogue inputs:

- Analogue signals from 0 ... 20 / 4 ... 20 mA
- 1024 points of resolution (10 Bits)
- Compatible with any field probe with a 0 ... 20 mA output (Barometers, thermometers, manometers, anemometers, humidity probes, flow meters, digital wind direction indicators, lux meters, etc.)

Technical specifications

LM4A-2IO-M

Code	M31565
Power Supply circuit	
Power Supply	85 ... 265 V.a.c. / 120 ... 374 V.d.c.
Consumption	4,6 ... 7,5 V·A
Frequency	47 ... 63 Hz
Digital inputs (opto-insulated voltage-free)	
No. of inputs	2
Max. activation current	50 mA
Analogue inputs (0 ... 20 mA)	
No. of inputs	4
Input range	0 ... 20 mA
Transducer resolution	10 bits (1024 points)
Digital outputs (relay)	
No. of outputs	2 (5 A max.)
Max. operating power	750 V·A
Max. operating voltage	250 V.a.c.
Max. switching current	Resistive load $I: 5$ A.a.c.
Electrical working life (250 Vac. / 5 A)	3×10^4 operations
Mechanical working life	2×10^7 operations
Communications	
Port	RS-485
Protocol	Modbus/RTU
Environmental conditions	
Operating temperature	-10 ... +60 °C
Protection degree	IP 20
Humidity	5 ... 95 % (without condensation)
Maximum altitude	2000 m
Safety	
Type of insulation	Category III - 300 V L-N EN 61010 double-insulated electric shock protection class II
Standards	
IEC60664, VDE0110, UL94, EN61010-1, EN55011, EN61000-4-3, EN61000-4-11, EN61000-6-4, EN61000-4-2, EN61000-6-2, EN61000-6-5, EN61000-6-1, EN61000-6-3, EN61000-4-5	

www.circutor.com

CIRCUTOR, SA - Vial Sant Jordi, s/n
08232 Viladecavalls (Barcelona) Spain
Tel. (+34) 93 745 29 00 - Fax: (+34) 93 745 29 14
central@circutor.es

