

M-Bus Mini-Master Level converter

Application

USB - M-Bus Level converter for communication between PC and M-Bus slaves.



Features

- LED data indicator (for sent and received data)
- M-Bus protection against overcurrent and short circuit
- Echo suppression
- M-Bus level converter with USB interface
- No external power supply required


Your benefits

- For mobile service applications
- Simple on-site configuration
- Integral M-Bus voltage supply (up to 32 M-Bus slaves)

Technical data

Bus system	M-Bus (EN 13757-2)		
Number of slaves	32		
Speed	Baud	300 - 19200	
Voltage supply	USB interface		
Temperature	T	°C	-0 - +55
Protection class	IP 40		
Weight	kg	0.1	
Width	W	mm	40
Height	H	mm	52
Depth	D	mm	14
Order information			
M-Bus Mini-Master	Art. no.	80695	

Typical application

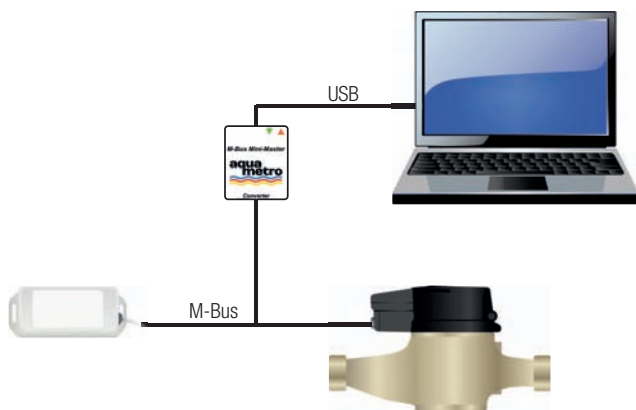

SALES PARTNER:

HEAD OFFICE:

AQUAMETRO AG
 Ringstrasse 75
 CH-4106 Therwil
 Phone +41 61 725 11 22
 Fax +41 61 725 15 95
 info@aquametro.com



www.aquametro.com