


Schneidplatten-Bohrer mit DIN ISO 9766-Schaft

Flanged holders - DIN ISO 9766 shank

Corpo punta - Attacco DIN ISO 9766

Serie / Series / Serie

I
 Ø 17,53 mm – 24,38 mm
 4,5 x D – 20,5 x D

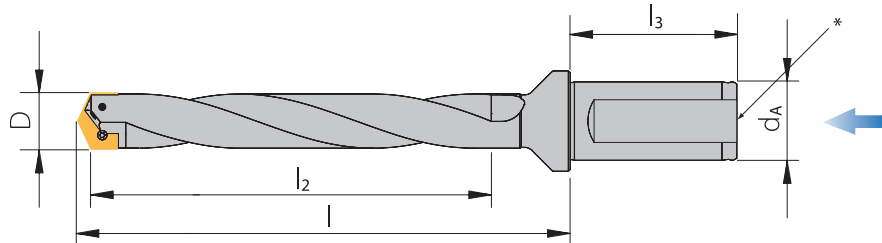

* Gewinde G 1/8"
 Thread
 Filetato -W

1

Trägerwerkzeug / Drill holder / Corpo punta

Bezeichnung Designation Articolo	Bohrtiefe Drill depth Profondità foratura	D	l	l ₂	l ₃	h	d _A	MK	Gewinde Thread Filetato
HI1753-2438-118SPW25	4,5 x D – 6,5 x D	17,53 – 24,38	158,4	118	53,1	-	25	-	-
HI1753-2438-168SPW25	6,5 x D – 9,5 x D	17,53 – 24,38	209,2	168	53,1	-	25	-	-
HI1753-2438-168SPW25-W	6,5 x D – 9,5 x D	17,53 – 24,38	209,2	168	53,1	-	25	-	G 1/8"
HI1753-2438-219SPW25	8,5 x D – 12 x D	17,53 – 24,38	260,0	219	53,1	-	25	-	-
HI1753-2438-270SPW25	11 x D – 15 x D	17,53 – 24,38	310,8	270	53,1	-	25	-	-
HI1753-2438-365SPW25	14,5 x D – 20,5 x D	17,53 – 24,38	406,0	365	53,1	-	25	-	-


HINWEIS: Trägerwerkzeuge werden mit Klemmschrauben, 2 Ersatzschrauben und Schlüssel geliefert.

INFORMATION: Holders will be supplied with clamping screws, 2 spare screws and key.

NOTA: L'utensile é fornito completo di 1 vite, 2 viti di ricambio e 1 chiave.

Serie / Series / Serie

K
 Ø 22,0 mm – 24,38 mm
 4,5 x D – 12 x D

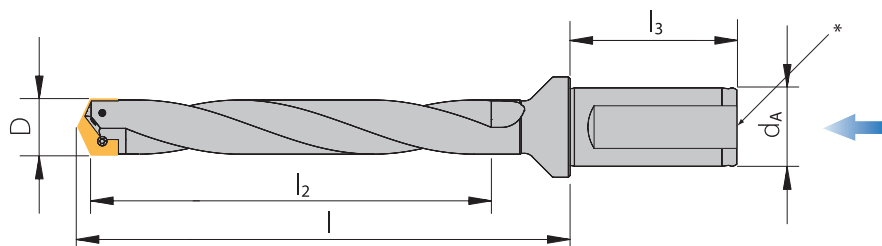

* Gewinde G 1/8"
 Thread
 Filetato -W

Trägerwerkzeug / Drill holder / Corpo punta

Bezeichnung Designation Articolo	Bohrtiefe Drill depth Profondità foratura	D	l	l ₂	l ₃	h	d _A	MK	Gewinde Thread Filetato
HK2200-2438-118SPW25	4,5 x D – 5 x D	22,0 – 24,38	158,4	118	53,1	-	25	-	-
HK2200-2438-168SPW25	6,5 x D – 7,5 x D	22,0 – 24,38	209,2	168	53,1	-	25	-	-
HK2200-2438-270SPW25	11 x D – 12 x D	22,0 – 24,38	310,8	270	53,1	-	25	-	-

HINWEIS: Trägerwerkzeuge werden mit Klemmschrauben, 2 Ersatzschrauben und Schlüssel geliefert.

INFORMATION: Holders will be supplied with clamping screws, 2 spare screws and key.

NOTA: L'utensile é fornito completo di 1 vite, 2 viti di ricambio e 1 chiave.