

Model TS318-5C50 Thermopile Sensor



- Thermopile IR-Sensor
- For Contactless Temperature Measurement
- Small package for Ear Thermometer
- Single Element
- Flat Filter
- NTC Reference Sensor

DESCRIPTION

Thermopiles are mainly used for contactless temperature measurement in many applications. Their function is to transfer the heat radiation emitted from the objects into a voltage output. Major applications are appliances like microwave oven, clothes dryer, automatic cooking, medical devices like ear and fore head thermometer, automotive applications like car climate control, seat occupancy, blind spot alert, black ice detection, consumer products like printer, copier, mobile phone and many industry applications like paper web, plastic parts etc.

FEATURES

- High Signal
- Accurate Reference Sensor
- Small TO-18 package

APPLICATIONS

- Medical
- Ear Thermometer

PERFORMANCE SPECS

Parameter	Unit	TS318-5C50	Condition
Package		TO-18	
Absorber	mm ²	1	
TP Resistance	kΩ	70±30	+25 °C ambient
TP TCR	%/K	-0.06±0.04	+25 °C → +75 °C ambient
TP Voltage	mV	8.8±2.2	+25 °C, BB +100 °C, DC, totally filled field of view
TC of sensitivity	%/K	-0.45±0.08	+25 °C → +75 °C ambient
NEV	nV/Hz ^{1/2}	35	+25 °C ambient
Rise Time	ms	12±5	τ ₆₃
Field of View		120 °	at 50%
Filter Type		LWP	LWP = long wave pass
Wavelength	μm	≥5.0	transmission range
Temperature	°C	-20...+85	permanent operation
Temperature	°C	-20...+100	non permanent
ATS		NTC	ambient temperature sensor
Resistance		100kΩ±5%	at 25 °C
ATS β-Value	K	3955 ±0.5%	0 °C → +50 °C ambient
Connections			
Pin 1		TP +	
Pin 2		NTC	
Pin 3		TP -	
Pin 4		GND	

Model TS318-5C50 Thermopile Sensor

ELECTRICAL CONNECTIONS

ambient temperature sensor: NTC
TS318-5C50




Figure 1: Electrical connections- bottom view of thermopile

MECHANICAL DIMENSIONS

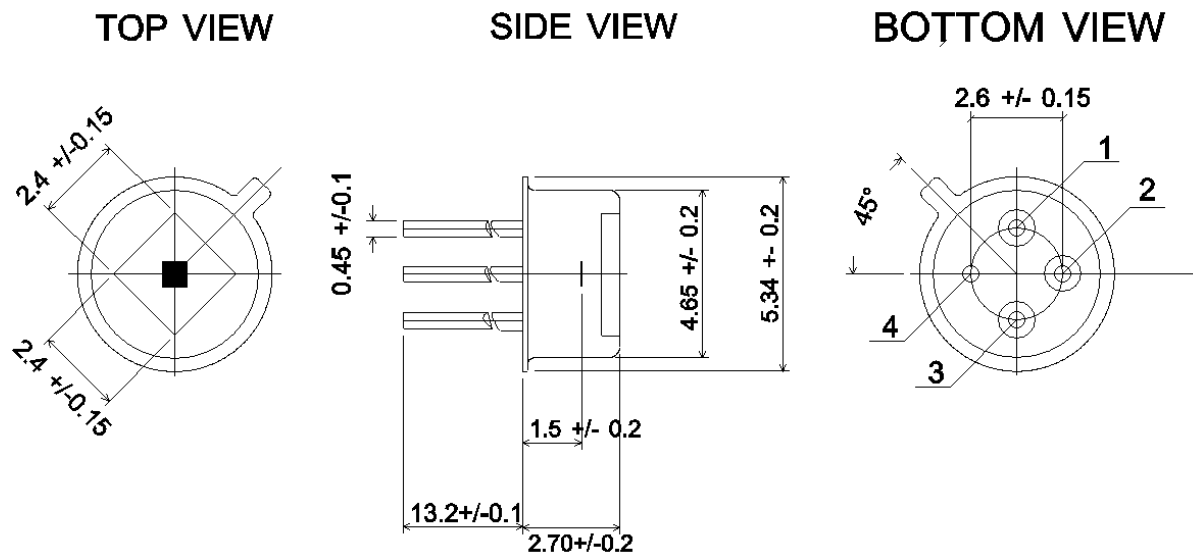


Figure 2: Mechanical dimensions of thermopile

TYPICAL PERFORMANCE CURVES

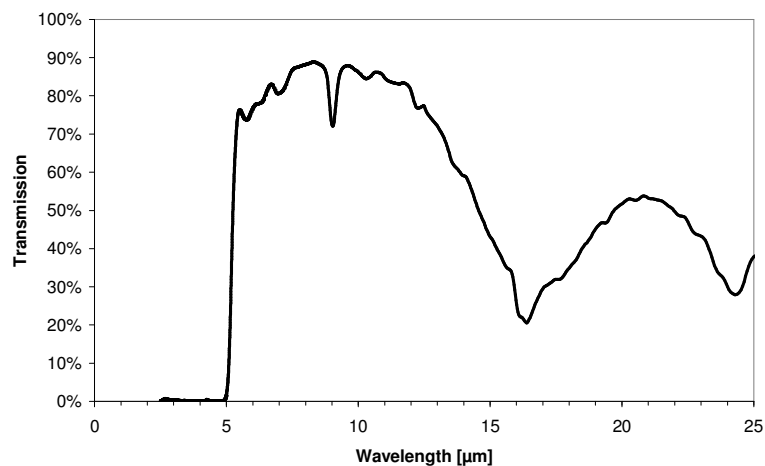


Figure 3: Filter transmission curve

Model TS318-5C50 Thermopile Sensor

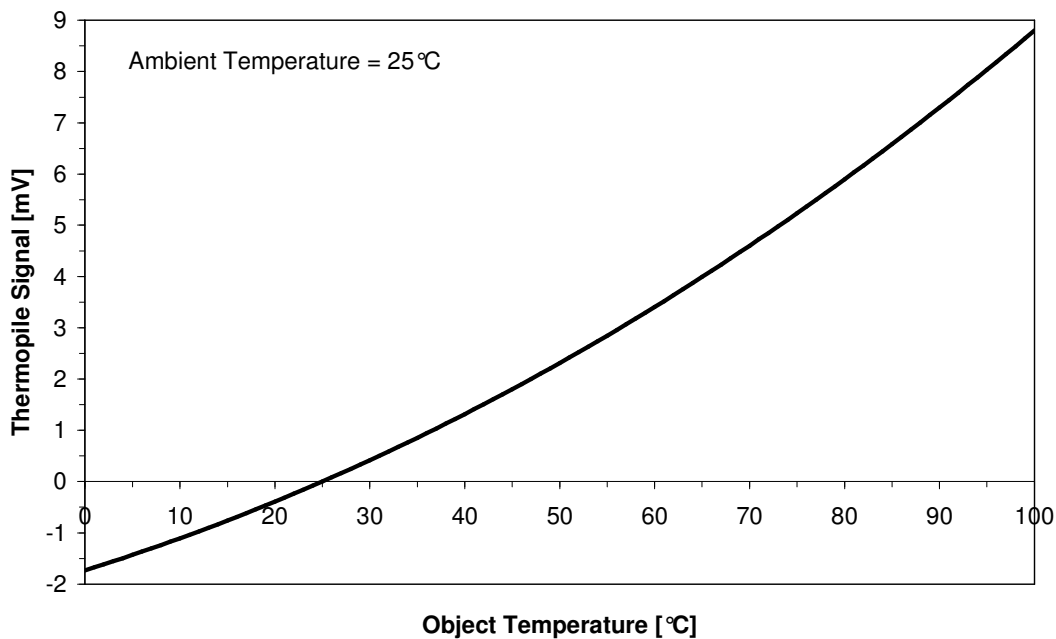


Figure 3: Thermopile signal versus object temperature at 25°C ambient temperature

ORDERING INFORMATION

Product code and part number:

Product TS 318-5C50

Part# tbd

Contact information:

NORTH AMERICA

Measurement Specialties, Inc.
910 Turnpike Road
Shrewsbury, MA 01545
Tel: 1-508-842-0516
Fax: 1-508-842-0342

Sales:

TPG.NA.sales@meas-spec.com

EUROPE

MEAS Deutschland GmbH
Hauert 13
44277 Dortmund
Tel: +49 (0) 231/9740-0
Fax: +49 (0) 231/9740-20

Sales:

TPG.EU.sales@meas-spec.com

ASIA

Measurement Specialties, Inc
Block 5A, Tian Fa Building, Tian
An Cyber Park, Fu Tian District,
ShenZhen, China 518048
Tel: +86 (0) 755 833 01004
Fax: +86 (0) 755 833 06797

Sales:

TPG.AS.sales@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.