



Rexnord Omega® E

Precision. Power. Performance.

You want a trusted name when it comes to providing engineered power transmission products that improve productivity and efficiency. Rexnord provides superior products for your industrial applications world wide. We work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment downtime.

Applications include:

- ▶ pumps
- ▶ compressors
- ▶ industrial fans
- ▶ mixers

Rexnord Omega® E

The Rexnord Omega is a unique general purpose elastomer coupling with split element design providing easy assembly and replace-in-place service. Available in close coupled and spacer designs. These unique designs permits faster installation and reduced inventories by providing multiple distance between shaft ends using the same elements and hubs. Rexnord Omega E design is used on close coupled applications.



Ex Certified II 2GD c T5


Rexnord Omega® E

Features

- ▶ Split in half element
- ▶ Torsionally soft
- ▶ Interchangeable hubs

Benefits


- ▶ Ease of installation
- ▶ Visual inspection
- ▶ Excellent vibration damping
- ▶ Low inventory requirements

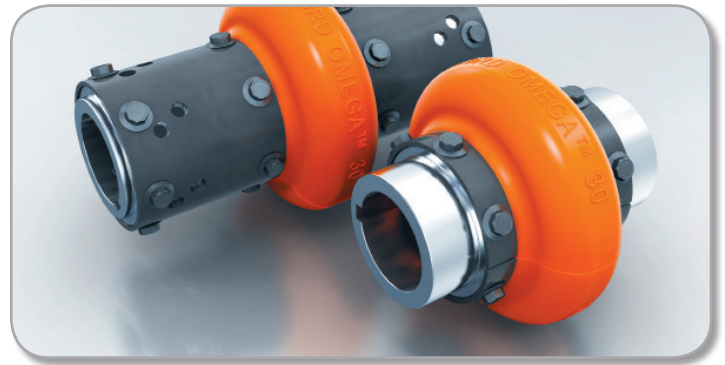

E

Finished bore hub

Taper bush hub

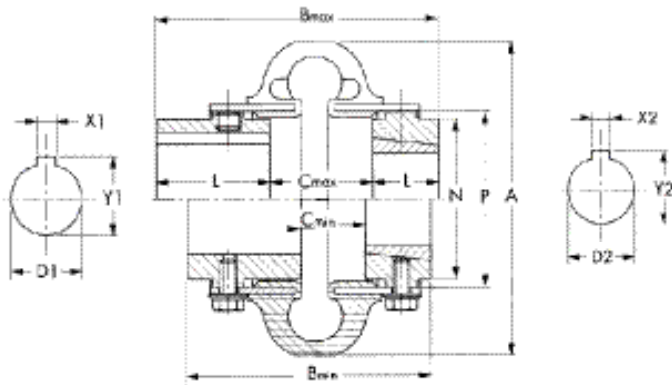

Torque Demands Driven Machine	Typical Application for Electric Motor or Turbine Driven Equipment	Typical Service Factor
	Constant torque such as centrifugal pumps blowers and compressors	1.0
	Continuous duty with some torque variations including plastic extruders and forced draft fans	1.5
	Light shock loads from metal extruders, cooling towers and log haulers	2.0
	Moderate shock loading as expected from a car dumper, stone crusher, vibrating screen	2.5
	Heavy shock load with some negative torques from reciprocating pumps, compressors, reversing turnout tables	3.0
	Frequent torque reversals such as reciprocating compressors with frequent torque reversals which do not necessarily include reverse rotations	Consult Rexnord Engineering

Size	Tnom Nm	n-max n-min	D1 max mm	Taper bush D2 max mm	A	B1min FRB	B1max FRB	B2min HTL	B2max HTL	C1min FRB	C1max FRB	C2min HTL	C2max HTL	L FRB	L HTL	N FRB	N HTL	P	J kgm	m kg
E2	22	7 500	28	- -	89	84	94	- -	- -	36	46	- -	- -	24	-	38	-	47	0,00032	0,5
E3	41	7 500	34	1008 25	102	84	122	87	87	8	46	43	43	38	22	50	50	59	0,00032	1,0
E4	62	7 500	42	1008 25	116	84	122	87	87	8	46	43	43	38	22	57	57	66	0,0012	1,3
E5	105	7 500	48	1210 32	137	97	147	103	103	8	59	52	52	44	25	70	71	80	0,0032	2,3
E10	164	7 500	55	1610 42	162	97	147	103	103	8	59	52	52	44	25	84	84	93	0,0064	3,4
E20	260	6 600	60	1610 42	184	113	169	114	114	9	65	64	64	52	25	95	89	114	0,016	6,8
E30	412	5 800	75	2012 50	210	125	185	128	128	7	68	64	64	59	32	114	102	138	0,034	10
E40	622	5 000	85	2517 65	241	135	201	150	150	9	75	60	60	63	45	146	117	168	0,08	17
E50	864	4 200	90	2517 65	279	151	231	165	165	11	91	76	76	70	45	152	124	207	0,158	24
E60	1 412	3 800	105	3020 75	318	173	261	186	186	9	97	84	84	82	51	165	146	222	0,266	34
E70	2 490	3 600	120	3535 90	356	189	279	238	238	19	109	60	60	85	89	175	165	235	0,366	39
E80	4 460	2 000	155	4040 100	406	245	377	299	299	17	149	95	95	114	102	240	194	286	1,054	77
E100	9 600	1 900	171	4545 110	533	324	375	267	267	44	95	38	38	140	114	260	260	359	2,19	95
E120	19 200	1 800	190	5050 125	635	362	429	305	305	57	127	51	51	152	127	299	299	448	2,93	163
E140	38 400	1 500	229	7060 177	762	432	483	381	381	76	127	76	76	178	152	381	381	530	4	280

*Weight and inertia with maximum bore and key way • Dimension C(1) finished bore hubs - C(2) with Taper Bush hubs



REXNORD NV, Belgium

Dellingstraat 55

2800 Mechelen

Phone: +32 / 15 44 38 11

Fax: +32 / 15 44 38 60

E-mail: CSB@rexnord.com

www.rexnord.eu

Contact