


# PRESSURE SWITCHES

---

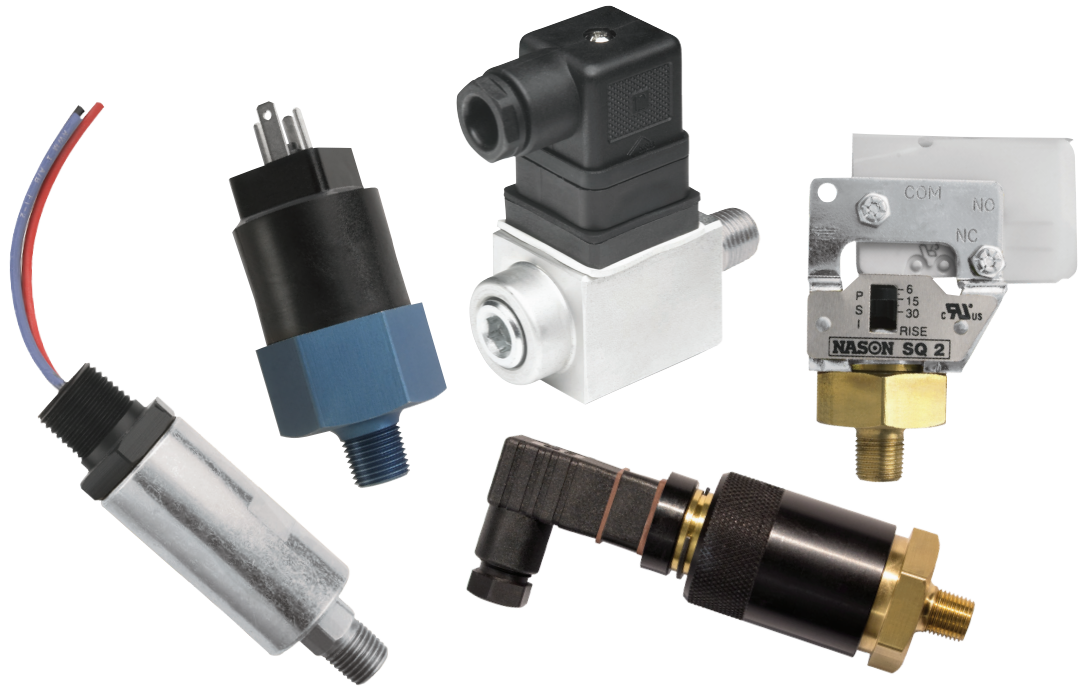

- Low to high pressure switch models with 2 psi to 7500 psi set points
- High-quality snap-action design
- Long-life elastomer diaphragms
- Proven sealed piston sensor on high-pressure models
- Over one million operating cycles
- 100% tested for accuracy
- Models for both pneumatic and hydraulic applications
- Adjustable and factory preset models
- Customizable
- NEMA 4 and 13 available

# TABLE OF CONTENTS

8

## PRESSURE SWITCHES





9	<b>SQ</b>	Low Pressure Switch
10	<b>SM</b>	Low Pressure Switch
11	<b>MM</b>	Low Pressure Switch
12	<b>LM</b>	Low Pressure Switch
13	<b>CJ</b>	Low Pressure Switch
14	<b>XM</b>	High Pressure Switch
15	<b>WX</b>	High Pressure Switch
16	<b>CD</b>	High Pressure Switch
17	<b>CF</b>	High Pressure Switch (Fixed Set Point)

\*

## RESOURCES

7	Basic Electrical Connection Options
58	Diaphragm Compatibility
59	Conversion Tables
60	Glossary of Terms

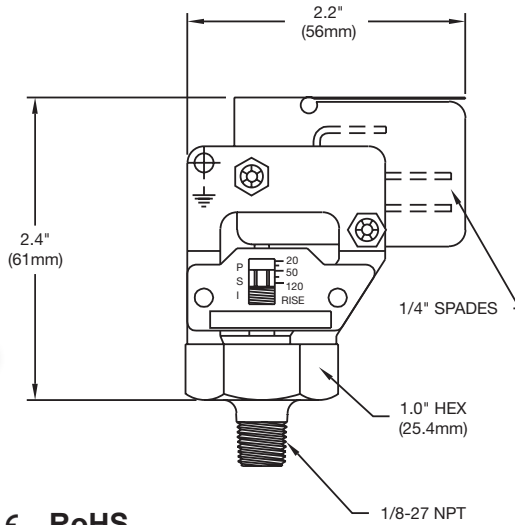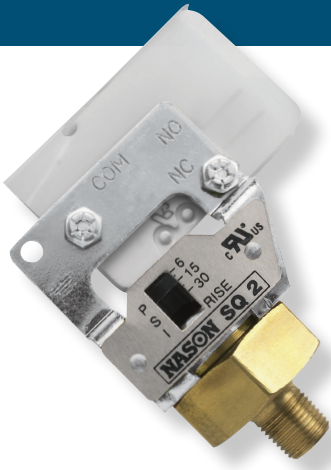

UL CE RoHS

### Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Fingertip adjustment
- Visual calibration
- Economical
- Quick delivery

### Operating Specifications


Set Point Range	2 — 120 PSI	(.14 — 8.3 Bar)
Set Point Tolerance	±1 PSI or 5%	(.07 Bar)
Maximum Operating Pressure	250 PSI	(17 Bar)
Proof Pressure	750 PSI	(51 Bar)
Differential	10 — 20%	
Current Rating	10 A @ 125/250 VAC	5 A @ 30 VDC
Media Connection	1/8" NPT Male Brass	
Circuit Form	SPDT	
Electrical Connection	1/4" Blades	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.2 lbs	

### In-Stock Low Pressure Switches




<b>Model</b>	SQ-1	SQ-2	SQ-3
<b>Adjustment Range</b>	2 — 10 PSI	6 — 30 PSI	20 — 120 PSI

For more [media connections](#), see pages 23-24.  
For more [electrical connections](#), see page 7.

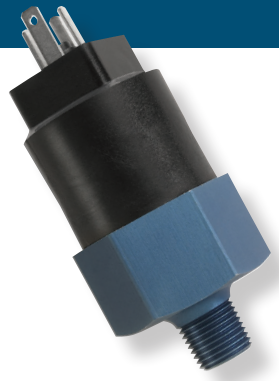

Shown with HP electrical option

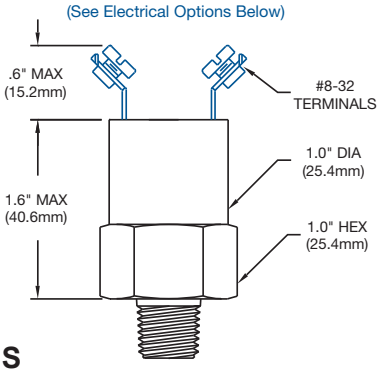

**UL** **CE** **RoHS**

**Features**

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

**Operating Specifications**

<b>Set Point Range</b>	2 – 120 PSI	(.14 – 8.3 Bar)
<b>Set Point Tolerance</b>	±1 PSI or 5%	(.07 Bar)
<b>Maximum Operating Pressure</b>	250 PSI	(17 Bar)
<b>Proof Pressure</b>	750 PSI	(51 Bar)
<b>Differential</b>	8 – 16%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS)	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.13 lbs	

**CHECK OUT**  
[nasonptc.com/configure](http://nasonptc.com/configure)  
 to create your own custom CAD file


**How to Order** (Example: Part Number: **SM - 2A - 95R /** )

SM	-	2	A	-	9	5	R	/	*
<b>Media Connection</b>		<b>Circuit Form</b>		<b>Fixed Set Point</b>		<b>Set Point Direction</b>		<b>Electrical Options</b>	
1 1/4" NPT Male 2 1/8" NPT Male 6 7/16" SAE O-Ring (-4) 14 1/2" NPT Male 1/8" NPT Female 17 1/4" BSPP Male (G1/4) 28 1/8" BSPP Male (G1/8) 41 7/16" – 20 Internal 45° Flare – SAE J 513 77 M16 x 1.5 SAE J2244-3		A SPST-NO B SPST-NC C SPDT		2 – 120 PSI		R Rising F Falling		WL Wire Leads 18" QC 1/4" Spade Connection WP Weather Pack HR DIN43650A Connector MP Metri-Pack AT 10 A @ 125/250 VAC 5 A @ 30 VDC GG Internal Ground AU Gold Plate/Alloy for low currents	
								* Defaults to Screw Terminals	

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

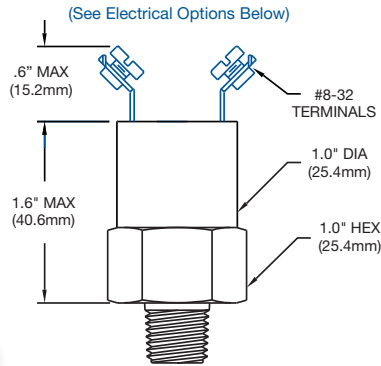

UL US CE RoHS

Shown with WP electrical option

### Features


- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

### Operating Specifications

<b>Set Point Range</b>	2 — 120 PSI	(.14 — 8.3 Bar)
<b>Set Point Tolerance</b>	±1 PSI or 5%	(.07 Bar)
<b>Maximum Operating Pressure</b>	600 PSI	(41 Bar)
<b>Proof Pressure</b>	1800 PSI	(124 Bar)
<b>Differential</b>	8 — 16%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS)	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.16 lbs	

**CHECK OUT**  
[nasonptc.com/configure](http://nasonptc.com/configure)  
 to create your own custom CAD file

### How to Order (Example: Part Number: **MM - 6A - 80R / WL** \*)

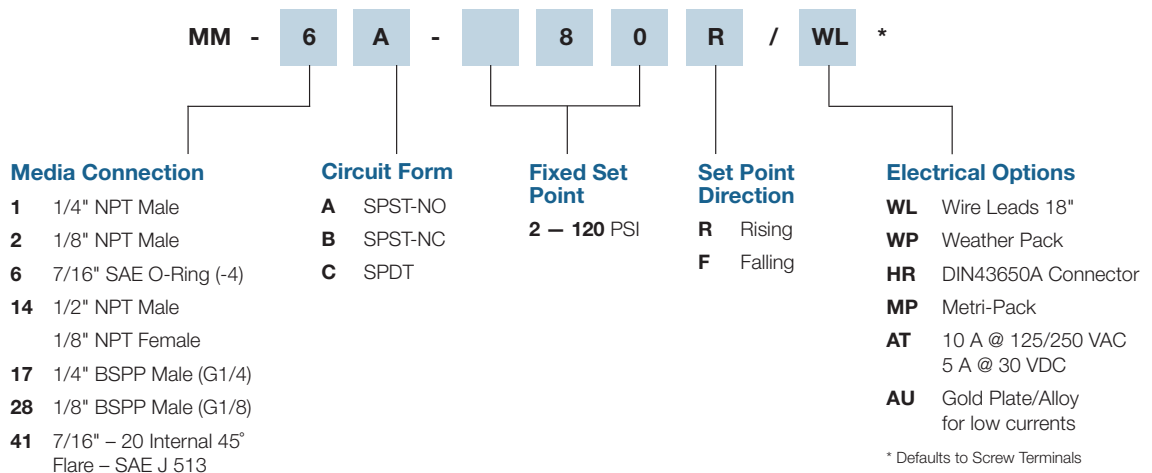


\* Defaults to Screw Terminals

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

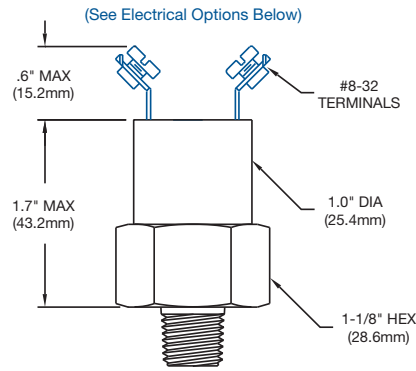

### Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13


Shown with unibody housing and EF electrical option

### Operating Specifications

<b>Set Point Range</b>	10 – 300 PSI	(.69 – 20 Bar)
<b>Set Point Tolerance</b>	±1 PSI or 5%	(.07 Bar)
<b>Maximum Operating Pressure</b>	2000 PSI	(137 Bar)
<b>Proof Pressure</b>	6000 PSI	(413 Bar)
<b>Differential</b>	12 – 24%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Brass (Optional: Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS)	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.23 lbs	

**CHECK OUT**  
[nasonptc.com/configure](https://nasonptc.com/configure)  
 to create your own custom CAD file

### How to Order (Example: Part Number: **LM - 6A - 250R / WL**)

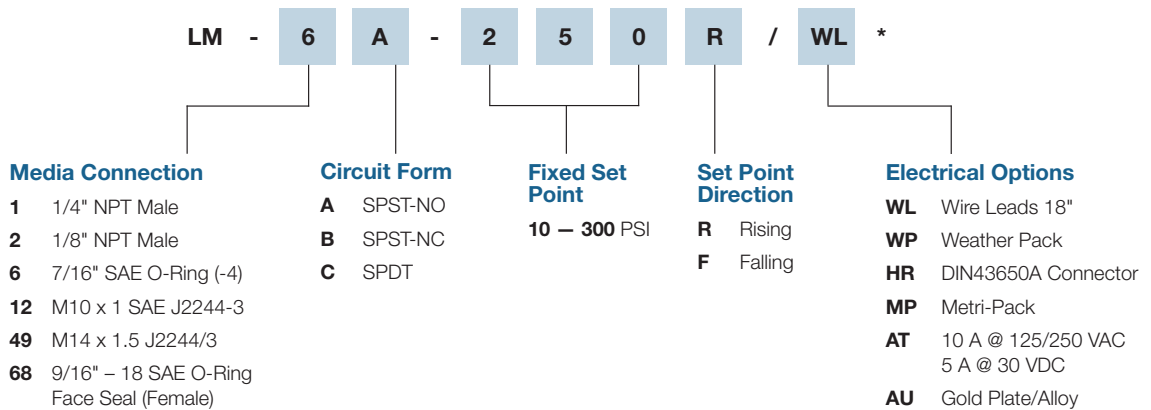


\* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

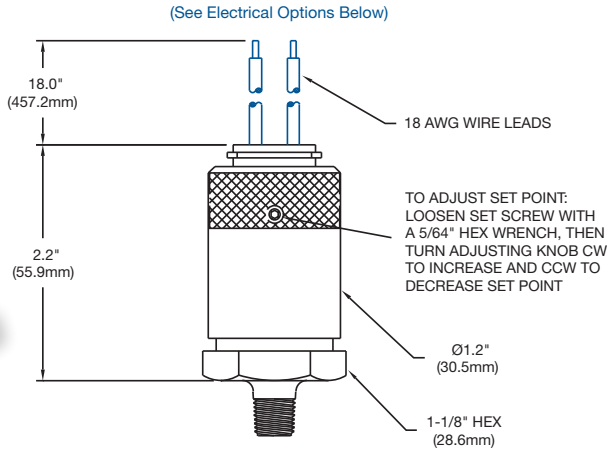

Shown with HM electrical option

**UL** **CE** **RoHS**

**Features**

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

**Operating Specifications**

<b>Set Point Range</b>	3 – 120 PSI	(.21 – 8.3 Bar)
<b>Set Point Tolerance</b>	±1 PSI or 5%	(.07 Bar)
<b>Maximum Operating Pressure</b>	250 PSI (Ranges 1 – 3)	(17 Bar)
<b>Proof Pressure</b>	750 PSI (Ranges 1 – 3)	(51 Bar)
<b>Differential</b>	10 – 20%	
<b>Current Rating</b>	3 A @ 125 VAC	2 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS)	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.42 lbs	

**CHECK OUT**  
[nasonptc.com/configure](http://nasonptc.com/configure)  
 to create your own custom CAD file

**How to Order** (Example: Part Number: **CJ - 1B3 - 60J / WL**)

<b>CJ</b>	<b>-</b>	<b>1</b>	<b>B</b>	<b>3</b>	<b>-</b>	<b>6</b>	<b>0</b>	<b>J</b>	<b>/</b>	<b>WL</b>
<b>Media Connection</b>		<b>Circuit Form</b>		<b>Range</b>		<b>Desired Set Point</b>		<b>Set Point Direction</b>		<b>Electrical Options</b>
<b>1</b> 1/4" NPT Male		<b>A</b> SPST-NO		<b>1</b> 3 – 10 PSI		<b>3 – 120 PSI</b>		<b>J</b> Rising Adjustable		<b>WL</b> Wire Leads 18"
<b>2</b> 1/8" NPT Male		<b>B</b> SPST-NC		<b>2</b> 6 – 30 PSI		<b>*121 – 1500 PSI</b>		<b>G</b> Falling Adjustable		<b>WP</b> Weather Pack
<b>6</b> 7/16" SAE O-Ring (-4)		<b>C</b> SPDT		<b>3</b> 20 – 120 PSI						<b>HM</b> 9.4mm DIN
<b>12</b> M10 x 1 SAE J2244-3				<b>4*</b> 100 – 400 PSI						<b>MP</b> Metri-Pack
<b>17</b> 1/4" BSPP Male				<b>5*</b> 500 – 1500 PSI						<b>AU</b> Gold Plate/Alloy for low currents
<b>28</b> 1/8" BSPP Male										


\* Not yet UL recognized

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.



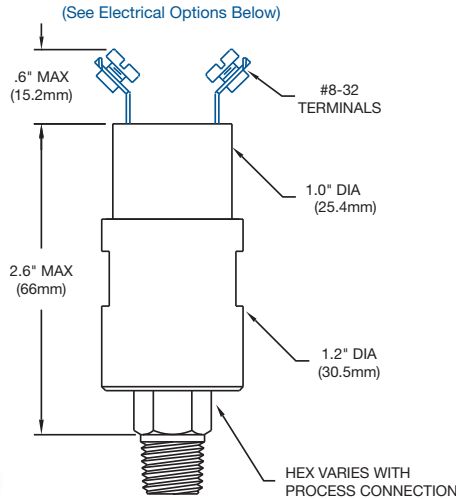

Shown with unibody housing and EL electrical option

**UL** **CE** **RoHS**

## Features


- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Compact design
- Available in a wide range of configurations
- Proven in the most demanding mobile hydraulic applications
- NEMA 4, 13

## Operating Specifications

<b>Set Point Range</b>	40 — 4000 PSI	(1.3 — 275 Bar)
<b>Set Point Tolerance</b>	±5 PSI or 5%	(.34 Bar)
<b>Maximum Operating Pressure</b>	5000 PSI	(344 Bar)
<b>Proof Pressure</b>	15000 PSI	(1034 Bar)
<b>Differential</b>	8 — 16%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Zinc Plated Steel ( <i>Optional: Brass, Nickel Plating, 303 SS, 316 SS</i> )	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.56 lbs	

**CHECK OUT**  
[nasonptc.com/configure](https://nasonptc.com/configure)  
 to create your own custom CAD file

## How to Order (Example: Part Number: **XM - 1A - 1500R / WL**)

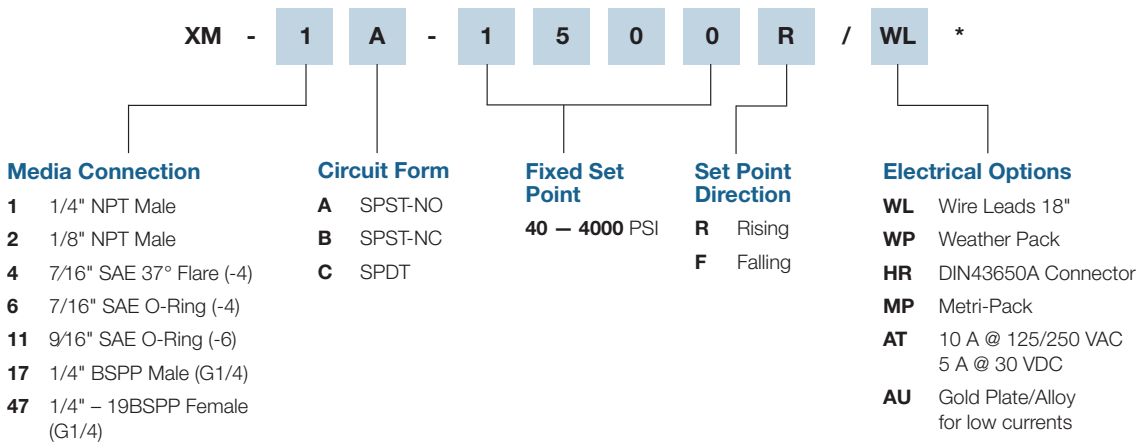


\* Defaults to Screw Terminals

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.



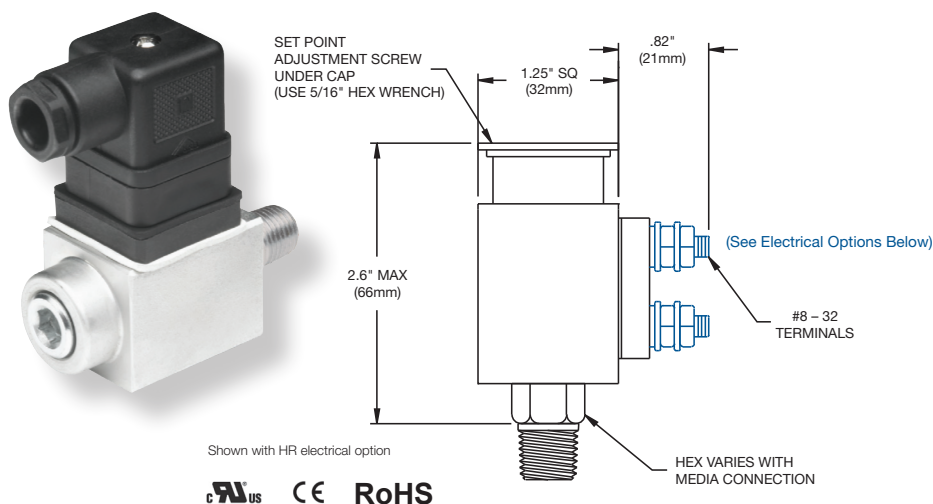

## Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Field adjustable
- Compact design
- Available in a wide range of configurations
- Proven in the most demanding mobile hydraulic applications
- NEMA 4, 13

Shown with HR electrical option

## Operating Specifications

<b>Set Point Range</b>	50 — 5000 PSI	(1.38 — 344 Bar)
<b>Set Point Tolerance</b>	±5 PSI or 5%	(.34 Bar)
<b>Maximum Operating Pressure</b>	5000 PSI	(344 Bar)
<b>Proof Pressure</b>	15000 PSI	(1034 Bar)
<b>Differential</b>	3 — 10%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Zinc Plated Steel ( <i>Optional: Brass, Nickel Plating, 303 SS, 316 SS</i> )	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.80 lbs	

**CHECK OUT**  
[nasonptc.com/configure](http://nasonptc.com/configure)  
 to create your own custom CAD file

## How to Order (Example: Part Number: **WX - 2A - 100J / HR** \*)


<b>WX - 2 A - 1 0 0 J / HR *</b>				
<b>Media Connection</b>	<b>Circuit Form</b>	<b>Adjustment Range</b>	<b>Set Point Direction</b>	<b>Electrical Options</b>
<b>1</b> 1/4" NPT Male	<b>A</b> SPST-NO	<b>50 — 150 PSI</b>	<b>J</b> Rising Adjustable	<b>WL</b> Wire Leads 18"
<b>2</b> 1/8" NPT Male	<b>B</b> SPST-NC	<b>140 — 400 PSI</b>	<b>G</b> Falling Adjustable	<b>QC</b> 1/4" Spade Connection
<b>4</b> 7/16" SAE 37° Flare (-4)	<b>C</b> SPDT	<b>300 — 800 PSI</b>		<b>WP</b> Weather Pack
<b>6</b> 7/16" SAE O-Ring (-4)		<b>700 — 2500 PSI</b>		<b>HR</b> DIN43650A Connector
<b>11</b> 9/16" SAE O-Ring (-6)		<b>2000 — 5000 PSI</b>		<b>MP</b> Metri-Pack
<b>17</b> 1/4" BSPP Male (G1/4)				<b>AT</b> 10 A @ 125/250 VAC 5 A @ 30 VDC
<b>39</b> 1/4" - 18 NPTF SAE J516 (-4)				<b>GG</b> Internal Ground
<b>67</b> 9/16" - 18 SAE O-Ring Face Seal				<b>AU</b> Gold Plate/Alloy for low currents

\* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

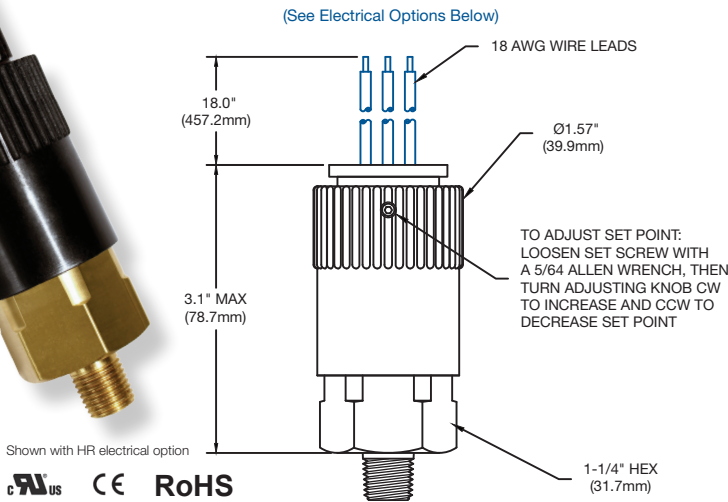

**Features**

- Long-life elastomer diaphragm (Ranges 1 – 3)
- Proven sealed piston sensor (Ranges 4 – 8)
- High-quality snap-action switch
- Field adjustable
- Easily customized
- Quick delivery
- NEMA 4, 13

**Operating Specifications**

<b>Set Point Range</b>	10 – 7500 PSI	(.69 – 517 Bar)
<b>Set Point Tolerance</b>	±5 PSI or 5%	(.34 Bar)
<b>Maximum Operating Pressure</b>	1000 PSI (Ranges 1 – 3)	(69 Bar)
	5000 PSI (Ranges 4 – 7)	(344 Bar)
	7500 PSI (Range 8)	(517 Bar)
<b>Proof Pressure</b>	3000 PSI (Ranges 1 – 3)	(206 Bar)
	15000 PSI (Ranges 4 – 7)	(1034 Bar)
	22500 PSI (Range 8)	(1551 Bar)
<b>Differential</b>	10 – 20%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Brass (Optional: Nickel Plating, 303 SS, 316 SS)	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna (Ranges 1 – 3)	
	Hardened Steel Piston (Ranges 4 – 8)	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.47 lbs (noryl adjustment knob); .70 lbs (metal adjustment knob)	

**CHECK OUT**  
[nasonptc.com/configure](http://nasonptc.com/configure)  
 to create your own custom CAD file


**How to Order** (Example: Part Number: **CD - 1B5 - 750 J / EL**)

CD - <b>1</b> <b>B</b> <b>5</b> - <b>7</b> <b>5</b> <b>0</b> <b>J</b> / <b>EL</b>	<p><b>Media Connection</b></p> <p><b>Piston</b></p> <p><b>1</b> 1/4" NPT Male</p> <p><b>3</b> 3/4" SAE Male (-8)</p> <p><b>11</b> 9/16" SAE Male</p> <p><b>Diaphragms</b></p> <p><b>1</b> 1/4" NPT Male</p> <p><b>9</b> 3/8" NPT Male</p>	<p><b>Circuit Form</b></p> <p><b>A</b> SPST-NO</p> <p><b>B</b> SPST-NC</p> <p><b>C</b> SPDT</p>	<p><b>Range</b></p> <p><b>1</b> 10 – 40 PSI</p> <p><b>2</b> 25 – 100 PSI</p> <p><b>3</b> 50 – 200 PSI</p> <p><b>4</b> 100 – 400 PSI</p> <p><b>5</b> 250 – 1000 PSI</p> <p><b>6</b> 500 – 2000 PSI</p> <p><b>7</b> 1200 – 4500 PSI</p> <p><b>8</b> 2400 – 7500 PSI</p>	<p><b>Desired Set Point</b></p> <p><b>10 – 7500 PSI</b></p>	<p><b>Set Point Direction</b></p> <p><b>J</b> Rising Adjustable</p> <p><b>G</b> Falling Adjustable</p>	<p><b>Electrical Options</b></p> <p><b>WL</b> Wire Leads 18"</p> <p><b>EL</b> Male Conduit 1/2" – 14</p> <p><b>EF</b> Female Conduit 1/2" – 14</p> <p><b>HR</b> DIN43650A Connector</p> <p><b>HH</b> DIN43650A Plug Only</p> <p><b>WP</b> Weather Pack</p> <p><b>MP</b> Metri-Pack</p> <p><b>WD</b> Deutsch</p> <p><b>AT</b> 10 A @ 125/250 VAC 5 A @ 30 VDC</p> <p><b>AU</b> Gold Plate/Alloy for low currents</p>
---	---	---	---	---	--	---

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

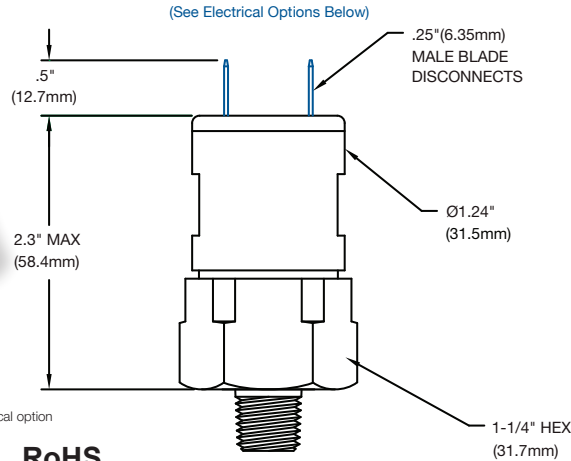

Shown with ES electrical option

**UL** **CE** **RoHS**

### Features


- Long-life elastomer diaphragm (Set Points: 10 – 300 PSI)
- Proven sealed piston sensor (Set Points: 100 – 4500 PSI)
- High-quality snap-action switch
- Easily customized
- Quick delivery
- NEMA 4, 13

### Operating Specifications

<b>Set Point Range</b>	10 – 4500 PSI	(.69 – 310 Bar)
<b>Set Point Tolerance</b>	±5 PSI or 5%	(.34 Bar)
<b>Maximum Operating Pressure</b>	1000 PSI (Diaphragm Model)	(69 Bar)
	5000 PSI (Piston Model)	(344 Bar)
<b>Proof Pressure</b>	3000 PSI (Diaphragm Model)	(206 Bar)
	15000 PSI (Piston Model)	(1034 Bar)
<b>Differential</b>	10 – 20%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	Standard: Brass (Optional: Nickel Plating, 303 SS, 316 SS)	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna (Diaphragm Design) Hardened Steel Piston (Piston Design)	
<b>Cycle Life</b>	1 Million	
<b>Operating Temperature</b>	-20°F - +220°F	
<b>Unit Weight</b>	.33 lbs (noryl switch housing); .38 lbs (metal switch housing)	

**CHECK OUT**  
[nasonptc.com/configure](http://nasonptc.com/configure)  
 to create your own custom CAD file

### How to Order (Example: Part Number: **CF - 1B - 750R / EL**)

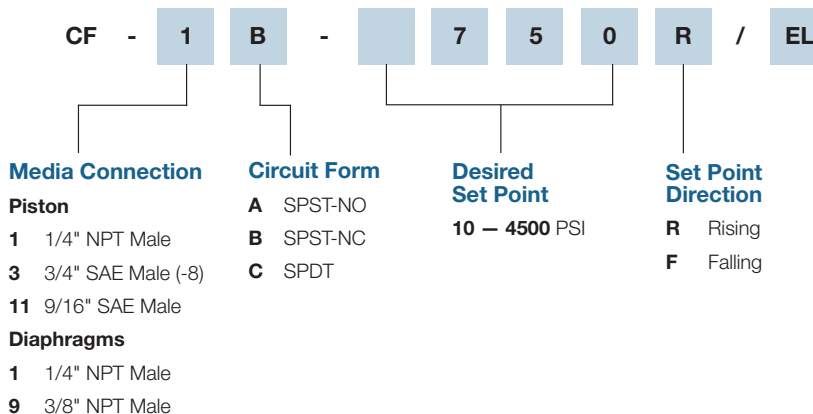

### Electrical Options

- WL** Wire Leads 18"
- EL** Male Conduit 1/2" – 14
- EF** Female Conduit 1/2" – 14
- HR** DIN43650A Connector
- HH** DIN43650A Plug Only
- WP** Weather Pack
- MP** Metri-Pack
- WD** Deutsch
- AT** 10 A @ 125/250 VAC  
5 A @ 30 VDC
- AU** Gold Plate/Alloy for low currents

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

# ELECTRICAL CONNECTION OPTIONS

## MORE THAN THE COMPETITION

Nason knows that your designs are used in all types of applications imaginable, so we want to make sure you have a choice of how you configure electrical connections. We offer you a wide and growing selection of connections, and if you want something else, just ask our design engineers for it.



Screw  
Terminals  
#8 - 32



**HF**

DIN43650A  
1/2" Conduit  
(Plug & Receptacle)  
IP65




**HH**

DIN43650A  
(Plug Only)




**HR**

DIN43650A  
Strain Relief  
(Plug & Receptacle)  
IP67



**HP**

9.4mm  
DIN  
(Plug Only)



**HM**

9.4mm DIN  
(Plug & Receptacle)  
IP65




**MP**

Metri-Pack  
Female 280  
Series Sealed  
IP66



**NP**

Metri-Pack  
Male 280  
Series Sealed  
IP66



**CP**

Metri-Pack  
Female 150  
Series Sealed  
IP66



**DP**

Metri-Pack  
Male 150  
Series Sealed  
IP66



**PP**

Boot  
(Military Connector)



**QC**

1/4" Male  
Spade Quick  
Connect



**WL**

Wire Leads



**WP**

Weather Pack  
(Female)  
IP66



**TP**

Weather  
Pack  
(Male)  
IP66



**EL**

1/2" NPT  
Male  
Conduit



**EF**

1/2" NPT  
Female  
Conduit



**WD**

Deutsch  
Receptacle  
IP67



**PD**

Deutsch  
Plug  
IP67



**ES**

M12 - 4PIN  
IP67



**CL**

Sheathed  
18 AWG  
Primaries



**SL**

SJO  
Cable



**VL**

Convolute  
Covering

**Color Code:** .....  
**Pin Assignments:** .....  
**DIN Connector Pin Assignments:** .....  
**M12 Connector Pin Assignments:** .....

**Black** - Common  
**A** - Normally Open  
**#1** - Common  
**#1** - Common

**Red** - Normally Open  
**B** - Common  
**#2** - Normally Closed  
**#2** - Not Used

**Blue** - Normally Closed  
**C** - Normally Closed  
**#3** - Normally Open  
**#3** - Normally Open

**#4** - Not Used  
**#4** - Normally Closed

## Diaphragm Compatibility

Media	Buna	EP	Viton
Acetic Acid		•	
Acetone		•	
Acetylene	•		
Air	•		
Alcohols	•		
Alkalies (Weak)	•		
Alkalies (Strong)		•	
Ammonia (Anhydrous)	•		
Ammonia (Hydroxide)		•	
Asphalt			•
Automotive Oils	•		
Beer	•		
Benzene			•
Boric Acid	•		
Brake Fluid		•	
Bunker Oil	•		
Butane	•		
Butyl Cellosolve		•	
Carbon Dioxide	•		
Carbon Monoxide	•		
Cellube		•	
Chlorobenzene			•
Citric Acid	•		
Coke Oven Gas			•
Coolanol	•		
Diesel Fuels	•		
Di-Ester Lube (MIL-L-7808)			•
Dowtherm A&E		•	
Ethanol	•		
Ether		•	
Ethylene	•		
Ethylene Glycol	•		
Freon 11, 12, 112, 114	•		
Freon 22		•	
Fyrquel		•	
Fuel Oil	•		
Gasoline	•		
Glycerin	•		
Helium	•		
Hexane	•		

Media	Buna	EP	Viton
Hydraulic Oil (PET Base)	•		
Hydrocarbons	•		
Hydrogen	•		
Hydrogen Sulphide		•	
Isopropanol		•	
JP-3-6	•		
Kerosene	•		
LPG	•		
Lube Oil (PET base)	•		
Methanol	•		
MEK		•	
Mineral Oil	•		
Motor Oils	•		
Naptha		•	
Natural Gas	•		
Nitric Acid		•	
Nitrogen	•		
Oleum Spirits			•
Oxygen	•		
Ozone		•	
Crude Oil	•		
Phosphoric Acid			•
Propane	•		
Propanol	•		
Pydraul		•	
Shell Iris 902	•		
Silicone Greases	•		
Silicone Oils	•		
Skydrol 500 & 7000		•	
Soap Solutions	•		
Steam Below 320°F		•	
Stoddard Solvent	•		
Sulfuric Acid			•
Toluene			•
Transmission Fluid A	•		
Trisodium Phosphate	•		
Turpentine	•	•	
Water to 220°F (104°C)	•		
Water to 302°F (150°C)		•	

Other diaphragm materials are available. Consult factory for stock.

**Temperature Conversions -** [Formula °C = 5/9 (°F - 32°) °F = (9/5 °C) +32°]

°C	°F	°C	°F	°C	°F	°C	°F	°C	°F
40	104.0	62	143.6	84	183.2	106	222.8	128	262.4
41	105.8	63	145.4	85	185.0	107	224.6	129	264.2
42	107.6	64	147.2	86	186.8	108	226.4	130	266.0
43	109.4	65	149.0	87	188.6	109	228.2	131	267.8
44	111.2	66	150.8	88	190.4	110	230.0	132	269.6
45	113.0	67	152.6	89	192.2	111	231.8	133	271.4
46	114.8	68	154.4	90	194.0	112	233.6	134	273.2
47	116.6	69	156.2	91	195.8	113	235.4	135	275.0
48	118.4	70	158.0	92	197.6	114	237.2	136	276.8
49	120.2	71	159.8	93	199.4	115	239.0	137	278.6
50	122.0	72	161.6	94	201.2	116	240.8	138	280.4
51	123.8	73	163.4	95	203.0	117	242.6	139	282.2
52	125.6	74	165.2	96	204.8	118	244.4	140	284.0
53	127.4	75	167.0	97	206.6	119	246.2	141	285.8
54	129.2	76	168.8	98	208.4	120	248.0	142	287.6
55	131.0	77	170.6	99	210.2	121	249.8	143	289.4
56	132.8	78	172.4	100	212.0	122	251.6	144	291.2
57	134.6	79	174.2	101	213.8	123	253.4	145	293.0
58	136.4	80	176.0	102	215.6	124	255.2	146	294.8
59	138.2	81	177.8	103	217.4	125	257.0	147	296.6
60	140.0	82	179.6	104	219.2	126	258.8	148	298.4
61	141.8	83	181.4	105	221.0	127	260.6	149	300.2

**Pressure Conversion Formulas**

Into > Multiply by To Convert	PSI	H2O (15°C)	mmHg (0°C)	"Hg (0°C)	Millibar	Bar	Kg/Cm2	kPa
PSI	•	27.70	51.71	2.036	68.95	0.06895	0.07031	6.895
"H2O (15°C)	0.03609	•	1.867	0.07349	2.489	0.002489	0.002538	0.249
mmHg (0°C)	0.01934	0.5357	•	0.03937	1.3333	0.0013333	0.0013596	0.113
"Hg (0°C)	0.4912	13.61	25.40	•	33.86	0.03386	0.03453	3.386
Millibar	0.0145	0.4018	0.750062	0.02953	•	0.001	0.0010197	0.09998
Bar	14.50	401.8	750.062	29.53	1000	•	1.0197	99.98
Kg/Cm2	14.22	394.05	735.559	28.96	980.7	0.9807	•	98.05
kPa	0.145	4.016	7.519	0.2953	10.002	0.010	0.0102	•

## Glossary of Terms

### Snap-Action Switches

Nason uses only the highest quality snap-action electrical switches which insure a positive, instantaneous electrical contact under all operating conditions. Nason electrical switches are UL, CSA, CE, and military listed. Ask about our new environmentally sealed snap-action switch.

### Diaphragms

Nason pressure switches incorporate elastomer diaphragms to provide a positive media seal. Nitrile is the material of choice for most applications. Ethylene propylene, fluorocarbon, fluorosilicon, and neoprene are readily available for specific applications.

### Differential

A distinct change in pressure (or temperature for temperature switches) is necessary to reset a Nason snap-action switch to its original electrical state. This feature prevents “searching” and maximizes switch and system life. Catalog ranges are typical mid-range and can be varied with special construction.

### Electrical Connections

A wide variety of electrical connectors are readily available for most applications. Screw terminals, wire leads, blades, studs, conduit, automotive DIN and military connectors are stock items.

### Media Connections

Nason’s offering of media connections is unmatched in the industry. NPT, BSP, SAE, JIS, DIN, MS and many others are readily available.

### Electrical Circuits

A unique variety of electrical contact arrangements allows the system designer to achieve complex logic at minimal cost. Contact arrangements up to form ZZ and isolated dual set points are available.

### Electrical Rating

Most Nason switches are available in a nominal 5 or 10 AMP rating. Gold plated contacts for low current and 25 AMP ratings are also available.

### Life

The operational life of a Nason switch is normally in excess of one million cycles. Operating life depends on many variables, and specific tests should be run if marginal conditions exist.

### Application

Nason switches are used successfully in a great variety of pneumatic and hydraulic applications. Military vehicles and equipment, aviation, marine, machine tools, farm and construction equipment, process equipment, medical equipment, and industrial machinery are typical applications.

### Customization

Nason has the experience and willingness to customize any switch to meet specific application requirements. Special media connections, electrical connections, circuitry and construction materials can be designed and produced as needed.


### Installation Torques

Pressure Switch - 10 ft lbs

Temperature Switch - 14-15 ft lbs.

## Circuitry

Adjustable Pressure Switch  
Component Symbol



Fixed Pressure Switch  
Component Symbol

